


**SPDLT, ASPDLT
Square Plaque Diffuser Low Temperature**

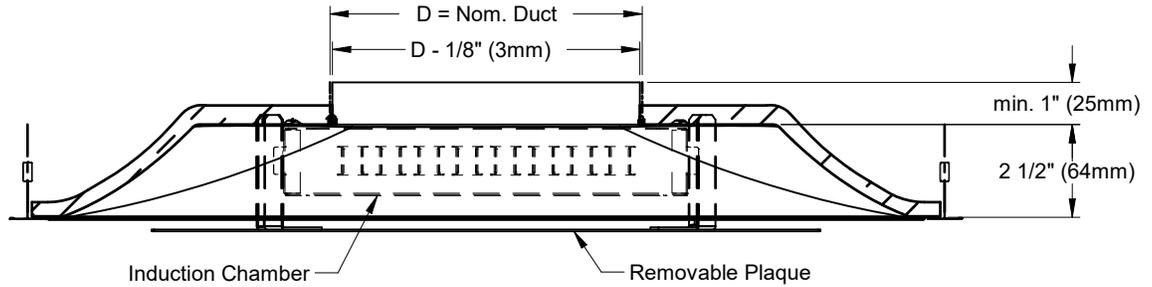

STANDARD CONSTRUCTION:

- SPDLT - Steel construction
- ASPDLT - Aluminum construction

FINISH:

- B12 - Standard White

Optional Finishes Available:

- Optional colors
- Custom colors
- Armstrong coordinated finishes

See finishes brochure for additional information. Contact your PRICE representative for leadtimes and pricing

NOTES:

- Externally insulated with 3/4" (19mm) dual density fiberglass with foil face which meets requirement of NFPA 90A and UL181.
- Induction chamber internally insulated with 1/2" (13mm) fiberglass with foil face which meets requirement of NFPA 90A and UL181.
- Internal plaque face thermally protected
- Others to provide externally insulated duct with vapor barrier, in accordance with recommended industry practice for low temperature installation.
- Others to seal airtight the field joint at the diffuser with industry approval duct sealer.
- Factory tolerance $\pm 1/32"$ (1mm).

DIFFUSER FACE SIZE:

- 20" x 20"
- 24" x 24"
- 500mm x 500mm
- 600mm x 600mm

DUCT SIZE:


- 4" (102mm)
 - 6" (152mm)
 - 8" (203mm)
 - 10" (254mm)
- (not available with 20"/500mm diffusers)



Scan for link to additional product information


OPTIONS:

- Hangers
 - Integral hanger loops (standard)
 - EHT - Extended hanger tabs

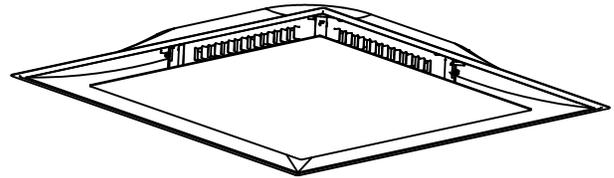


FRAMES:

- Style 1 - Surface Mount

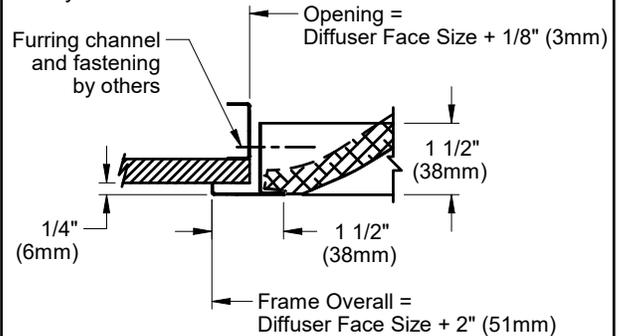

- Style 3 - 15/16" T-Bar Lay-in

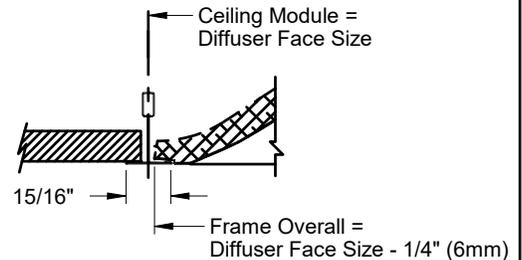

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		 SPDLT/ASPDLT SQUARE PLAQUE DIFFUSER LOW TEMPERATURE
ENGINEER:		
CUSTOMER:		
SUBMITTAL DATE:	SPEC. SYMBOL:	
		225183 2022-06-23