


SLIP & DRIVE CONNECTION

HOOK LANCE CONNECTION



UNIT SIZE	IMPERIAL UNITS (inches)							
	STANDARD COILS				HIGH CAPACITY COILS			
	B	C	CONNECTION SIZES		B	C	CONNECTION SIZES	
			1 ROW	2 ROW			1 ROW	2 ROW
10	12	10	1/2	7/8	14	12 1/2	1/2	7/8
20	16	15	7/8	7/8	20	17 1/2	1/2	7/8
30	16	15	7/8	7/8	20	17 1/2	1/2	7/8
40	16	15	7/8	7/8	20	17 1/2	1/2	7/8
50	20	17 1/2	7/8	7/8	28	17 1/2	7/8	7/8

UNIT SIZE	SI UNITS (mm)							
	STANDARD COILS				HIGH CAPACITY COILS			
	B	C	CONNECTION SIZES		B	C	CONNECTION SIZES	
			1 ROW	2 ROW			1 ROW	2 ROW
10	305	254	13	22	356	318	13	22
20	406	381	22	22	508	445	13	22
30	406	381	22	22	508	445	13	22
40	406	381	22	22	508	445	13	22
50	508	445	22	22	711	445	22	22

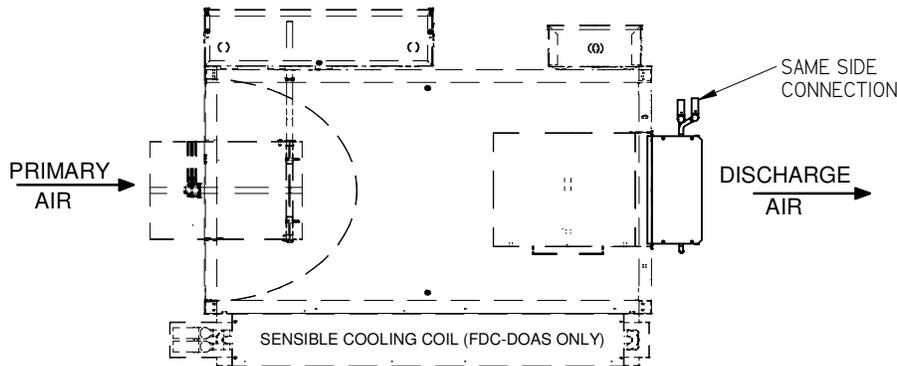

NOTES:

- FABRICATED FROM 22 GA. GALVANIZED STEEL. MECHANICALLY SEALED, LEAK RESISTANT CONSTRUCTION.
- HOT WATER COILS HAVE COPPER TUBES AND ALUMINUM FINS WITH O.D. SWEAT CONNECTIONS.
- METHOD OF VENTING HOT WATER COIL IS TO BE PROVIDED BY INSTALLING CONTRACTOR.

4. HANDING OF HOT WATER COILS CAN BE ON THE SAME SIDE AS THE CONTROLS, OR OPPOSITE SIDE. LEFT HAND UNIT WITH SAME SIDE CONNECTION IS ILLUSTRATED ABOVE.

5. ALLOW 1 1/2" (38) MINIMUM CLEARANCE FOR INSTALLATION AT THIS END.

6. PERFORMANCE RATED AND CERTIFIED IN ACCORDANCE WITH THE CURRENT EDITION OF AHRI STANDARD 410.

7. STANDARD COILS SUPPLIED WITH 10 FINS PER INCH.

OPTIONS:




- HC - HIGH CAPACITY COILS SUPPLIED WITH 12 FINS PER INCH.

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		 HOT WATER COILS FAN POWERED TERMINALS FDC & FDC DOAS SIZES 10-50
ENGINEER:		
CUSTOMER:		
SUBMITTAL DATE:	SPEC. SYMBOL:	
		CH 267930 09/26/2019




SEE NOTE #6 7/8" (22) DIA @ 4-1/4" (108)

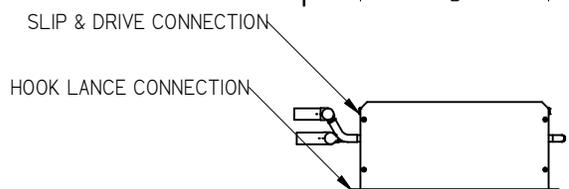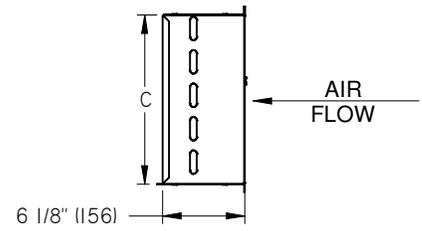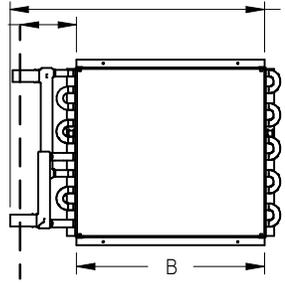

UNIT SIZE	IMPERIAL UNITS (inches)							
	STANDARD COILS				HIGH CAPACITY COILS			
	B	C	CONNECTION SIZES		B	C	CONNECTION SIZES	
			1 ROW	2 ROW			1 ROW	2 ROW
60	38	18	7/8	7/8	38	18	7/8	7/8

UNIT SIZE	SI UNITS (mm)							
	STANDARD COILS				HIGH CAPACITY COILS			
	B	C	CONNECTION SIZES		B	C	CONNECTION SIZES	
			1 ROW	2 ROW			1 ROW	2 ROW
60	965	457	22	22	965	457	22	22

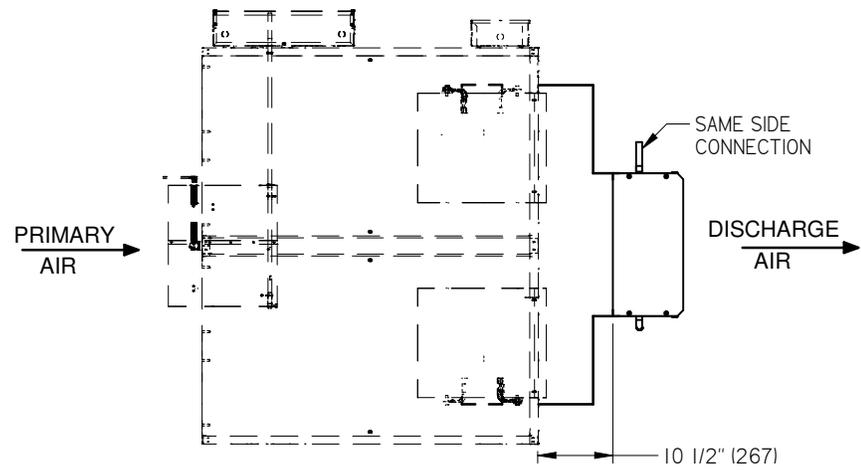

NOTES:


- FABRICATED FROM 22 GA. GALVANIZED STEEL. MECHANICALLY SEALED, LEAK RESISTANT CONSTRUCTION.
- HOT WATER COILS HAVE COPPER TUBES AND ALUMINUM FINNS WITH O.D. SWEAT CONNECTIONS.
- METHOD OF VENTING HOT WATER COIL IS TO BE PROVIDED BY INSTALLING CONTRACTOR.
- FLANGED ADAPTOR REQUIRED TO ATTACH HOT WATER COILS TO FANS.
- HANDING OF HOT WATER COILS CAN BE ON THE SAME SIDE AS THE CONTROLS, OR OPPOSITE SIDE LEFT HAND UNIT WITH SAME SIDE CONNECTION IS ILLUSTRATED ABOVE.
- ALLOW 1 1/2" (38) MINIMUM CLEARANCE FOR INSTALLATION AT THIS END.
- PERFORMANCE RATED AND CERTIFIED IN ACCORDANCE WITH THE CURRENT EDITION OF AHRI STANDARD 410.
- STANDARD COILS SUPPLIED WITH 10 FINNS PER INCH.

OPTIONS:

- HC - HIGH CAPACITY COILS SUPPLIED WITH 12 FINNS PER INCH.


ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		 HOT WATER COILS FAN POWERED TERMINALS FDC SIZE 60
ENGINEER:		
CUSTOMER:		
SUBMITTAL DATE:	SPEC. SYMBOL:	
		CH 267930 09/26/2019

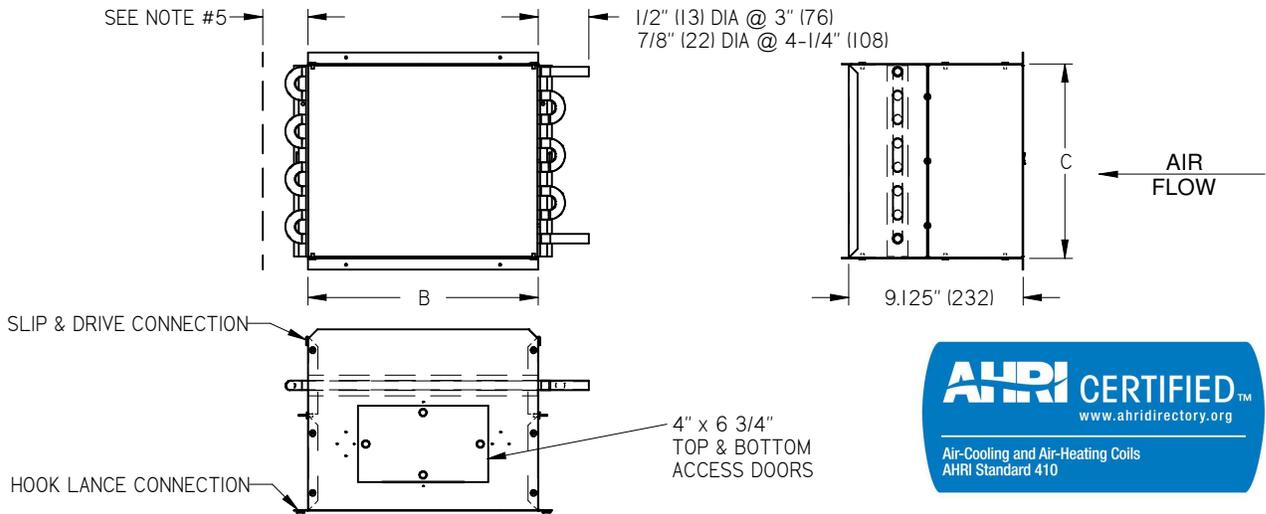

UNIT SIZE	IMPERIAL UNITS (inches)							
	STANDARD COILS				HIGH CAPACITY COILS			
	B	C	CONNECTION SIZES		B	C	CONNECTION SIZES	
			1 ROW	2 ROW			1 ROW	2 ROW
10	12	10	1/2	7/8	14	12 1/2	1/2	7/8
20	16	15	7/8	7/8	20	17 1/2	1/2	7/8
30	16	15	7/8	7/8	20	17 1/2	1/2	7/8
40	16	15	7/8	7/8	20	17 1/2	1/2	7/8
50	20	17 1/2	7/8	7/8	28	17 1/2	7/8	7/8

UNIT SIZE	SI UNITS (mm)							
	STANDARD COILS				HIGH CAPACITY COILS			
	B	C	CONNECTION SIZES		B	C	CONNECTION SIZES	
			1 ROW	2 ROW			1 ROW	2 ROW
10	305	254	13	22	356	318	13	22
20	406	381	22	22	508	445	13	22
30	406	381	22	22	508	445	13	22
40	406	381	22	22	508	445	13	22
50	508	445	22	22	711	445	22	22

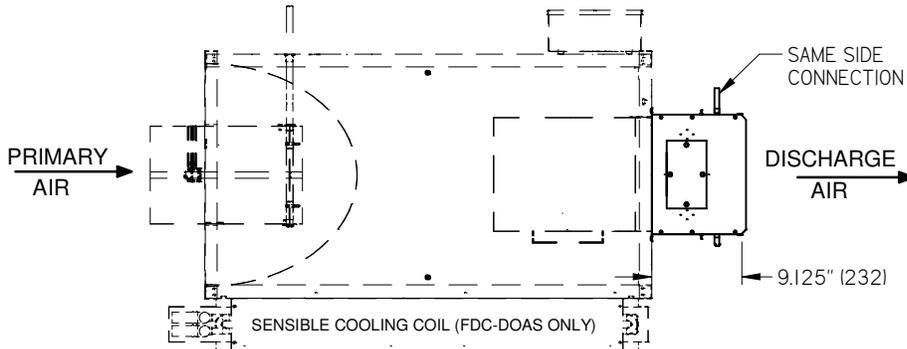

NOTES:

- FABRICATED FROM 22 GA. GALVANIZED STEEL. MECHANICALLY SEALED, LEAK RESISTANT CONSTRUCTION.
- HOT WATER COILS HAVE COPPER TUBES AND ALUMINUM FINNS WITH O.D. SWEAT CONNECTIONS.
- METHOD OF VENTING HOT WATER COIL IS TO BE PROVIDED BY INSTALLING CONTRACTOR.
- HANDING OF HOT WATER COILS CAN BE ON THE SAME SIDE AS THE CONTROLS, OR OPPOSITE SIDE. LEFT HAND UNIT WITH SAME SIDE CONNECTION IS ILLUSTRATED ABOVE.
- ALLOW 1 12" (38) MINIMUM CLEARANCE FOR INSTALLATION AT THIS END.

6. PERFORMANCE RATED AND CERTIFIED IN ACCORDANCE WITH THE CURRENT EDITION OF AHRI STANDARD 410.


7. STANDARD COILS SUPPLIED WITH 10 FINNS PER INCH.

OPTIONS:

- HC - HIGH CAPACITY COILS SUPPLIED WITH 12 FINNS PER INCH
- CAD - ACCESS DOOR W/SCREWS
- CADL - ACCESS DOOR W/SNAP LATCHES
- CADQ - COIL ACCESS DOOR W/QUARTER TURN SASH LATCHES


ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		 HOT WATER COILS FAN POWERED TERMINALS FDC & FDC DOAS w/ ACCESS DOOR SIZES 10-50
ENGINEER:		
CUSTOMER:		
SUBMITTAL DATE:	SPEC. SYMBOL:	
		CH 267931 09/26/2019

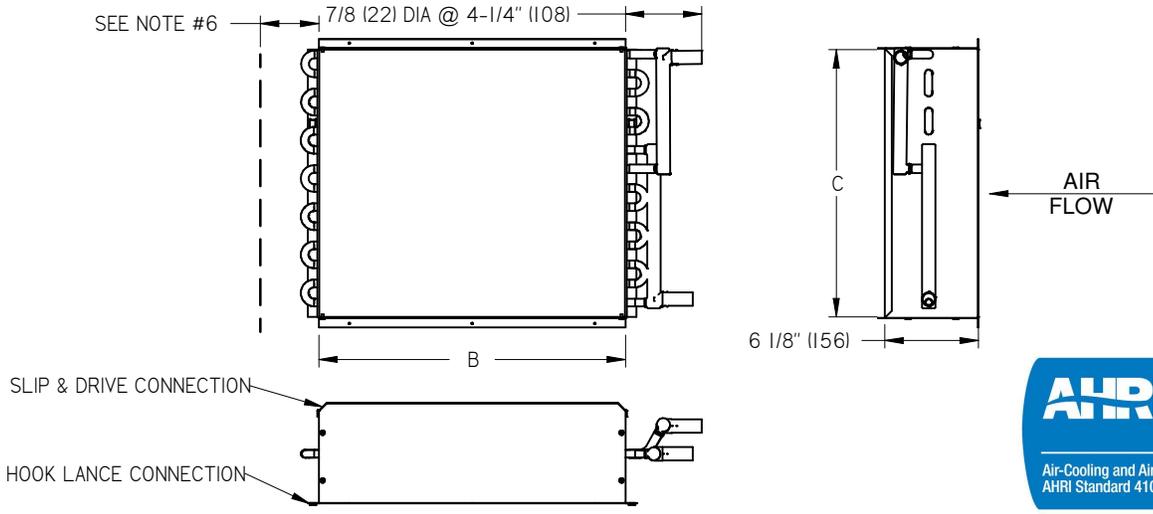

UNIT SIZE	IMPERIAL UNITS (inches)							
	STANDARD COILS				HIGH CAPACITY COILS			
	B	C	CONNECTION SIZES		B	C	CONNECTION SIZES	
			1 ROW	2 ROW			1 ROW	2 ROW
60	38	18	7/8	7/8	38	18	7/8	7/8

UNIT SIZE	SI UNITS (mm)							
	STANDARD COILS				HIGH CAPACITY COILS			
	B	C	CONNECTION SIZES		B	C	CONNECTION SIZES	
			1 ROW	2 ROW			1 ROW	2 ROW
60	965	457	22	22	965	457	22	22

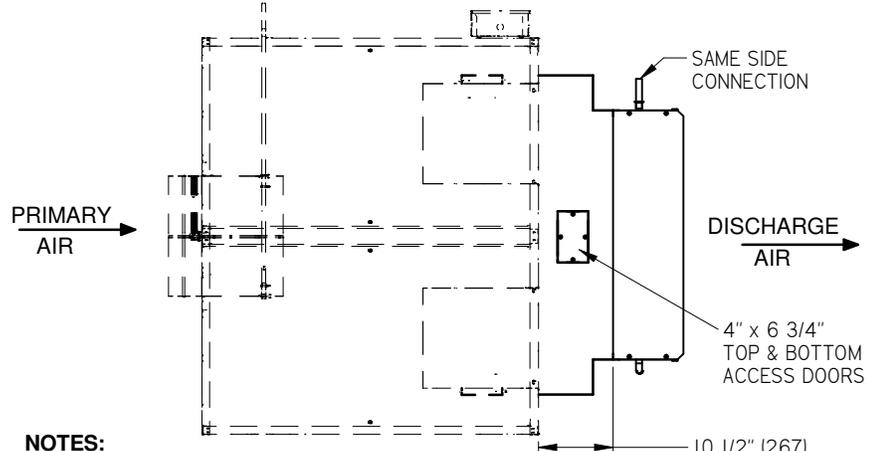

NOTES:

1. FABRICATED FROM 22 GA. GALVANIZED STEEL. MECHANICALLY SEALED, LEAK RESISTANT CONSTRUCTION.
2. HOT WATER COILS HAVE COPPER TUBES AND ALUMINUM FINS WITH O.D. SWEAT CONNECTIONS.
3. METHOD OF VENTING HOT WATER COIL IS TO BE PROVIDED BY INSTALLING CONTRACTOR.
4. FLANGED ADAPTOR REQUIRED TO ATTACH HOT WATER COILS TO FANS.
5. HANDING OF HOT WATER COILS CAN BE ON THE SAME SIDE AS THE CONTROLS, OR OPPOSITE SIDE. LEFT HAND UNIT WITH SAME SIDE CONNECTION IS ILLUSTRATED ABOVE.
6. ALLOW 1 1/2" (38) MINIMUM CLEARANCE FOR INSTALLATION AT THIS END.

7. PERFORMANCE RATED AND CERTIFIED IN ACCORDANCE WITH THE CURRENT EDITION OF AHRI STANDARD 410.
8. STANDARD COILS SUPPLIED WITH 10 FINS PER INCH.



OPTIONS:

- HC - HIGH CAPACITY COILS SUPPLIED WITH 12 FINS PER INCH
- CAD - ACCESS DOOR W/SCREWS
- CADL - ACCESS DOOR W/SNAP LATCHES
- CADQ - COIL ACCESS DOOR W/QUARTER TURN SASH LATCHES

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		 HOT WATER COILS FAN POWERED TERMINALS FDC w/ ACCESS DOOR SIZE 60
ENGINEER:		
CUSTOMER:		
SUBMITTAL DATE:	SPEC. SYMBOL:	
		CH 267931 09/26/2019

Solid Edge

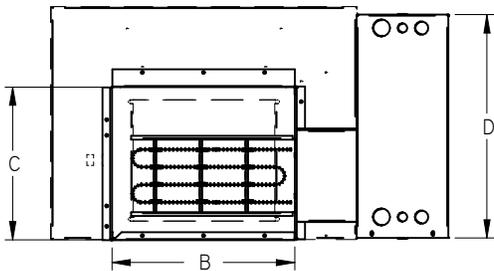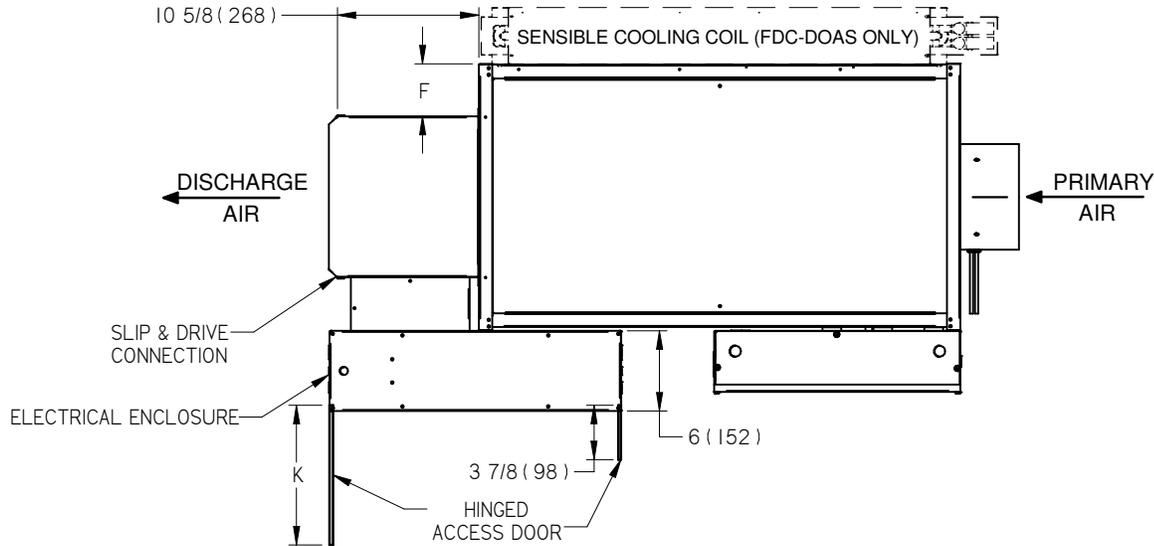

UNIT SIZES	OUTLET DUCT SIZE B X C	D	F	K
10	12x10 (305x254)	14 5/8 (371)	4 (102)	18 3/8 (467)
20	16x15 (406x381)	18 (457)	5 (127)	16 1/4 (413)
30	16x15 (406x381)	18 (457)	5 (127)	16 1/4 (413)
40	16x15 (406x381)	18 (457)	5 (127)	16 1/4 (413)
50	20x17 1/2 (508x445)	18 (457)	3 (76)	16 1/4 (413)

STANDARD FEATURES

- INTEGRATED RIVET HINGED ACCESS DOOR
- AUTOMATIC RESET THERMAL CUTOUT
- MANUAL RESET THERMAL CUTOUT
- FAN INTERLOCKED WITH HEATING ELEMENTS
- MAGNETIC CONTACTORS
- 20 GA. GALVANIZED STEEL CONSTRUCTION
- HIGH GRADE NICKEL CHROME HEATING ELEMENTS
- SINGLE POINT ELECTRICAL CONNECTION, EXCEPT SEPARATE POWER SUPPLY FOR 600/3 ϕ /3 WIRE

SUPPLY VOLTAGE:

- 115/1 ϕ
- 208/1 ϕ (3 WIRE)
- 240/1 ϕ
- 277/1 ϕ
- 480/1 ϕ (3 WIRE)
- 208/3 ϕ (4 WIRE)
- 480/3 ϕ (4 WIRE)
- 600/3 ϕ (3 OR 4 WIRE)

OPTIONAL FEATURES



- AIR FLOW SWITCH
- CONTROL CIRCUIT FUSE
- DOOR INTERLOCK DISCONNECT SWITCH
- MAIN SUPPLY FUSE
- MOTOR FUSE
- SCR CONTROLS
- SCR-DAT CONTROLS
 - 0 to 10 Vdc CONTROL SIGNAL
 - 4 to 20 mA CONTROL SIGNAL
 - 24 VAC PULSE CONTROL
- DP - DUAL POINT POWER CONNECTION
- INSULATED EC SECTION

NOTES

- 70 CFM PER KW MINIMUM AIR FLOW ACROSS HEATER COILS.
- MINIMUM 0.2" w.g.(50 Pa) EXTERNAL STATIC PRESSURE TO OPERATE.
- ASSEMBLY ETL CERTIFIED TO UL1995 & CSA236.

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		
ENGINEER:		
CUSTOMER:		GH
SUBMITTAL DATE:		267932
SPEC. SYMBOL:		09/26/2019
		ELECTRIC COILS CONSTANT VOLUME FDC & FDC DOAS SIZES 10-50

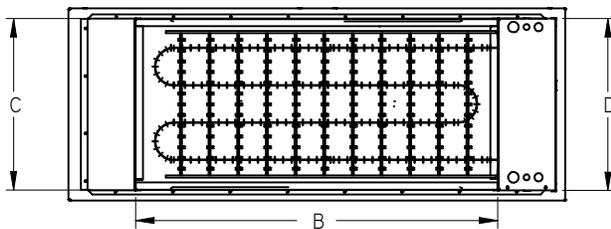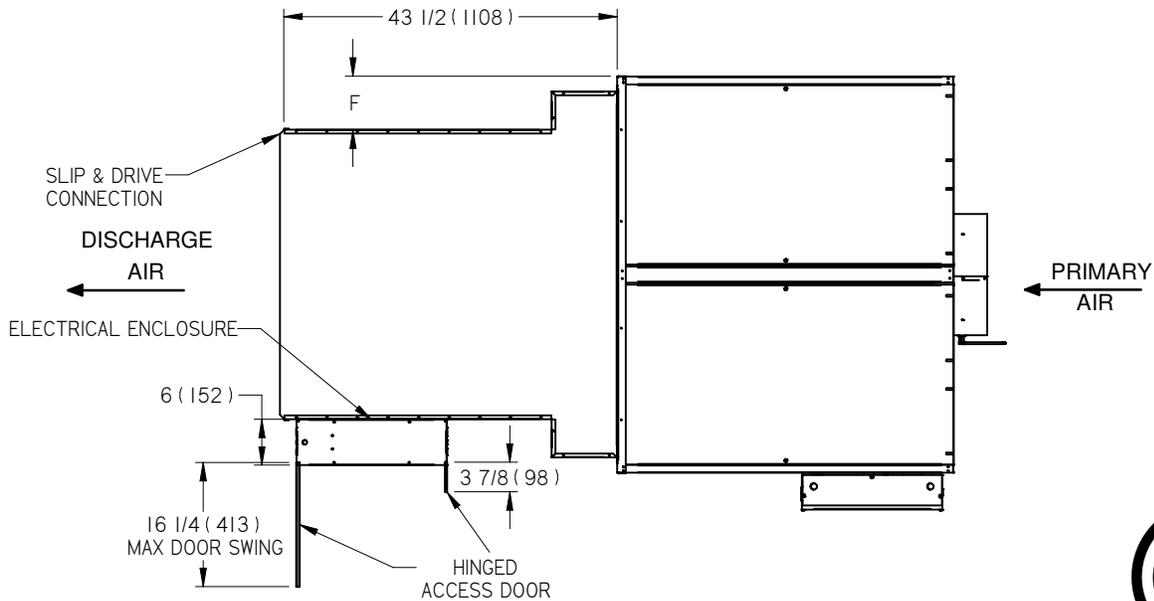

UNIT SIZES	OUTLET DUCT SIZE B X C	D	F
60	38x18 (965x457)	18 (457)	7 (178)

STANDARD FEATURES

- INTEGRATED RIVET HINGED ACCESS DOOR
 - AUTOMATIC RESET THERMAL CUTOUT
 - MANUAL RESET THERMAL CUTOUT
 - FAN INTERLOCKED WITH HEATING ELEMENTS
 - MAGNETIC CONTACTORS
 - 20 GA. GALVANIZED STEEL CONSTRUCTION
 - HIGH GRADE NICKEL CHROME HEATING ELEMENTS
 - SINGLE POINT ELECTRICAL CONNECTION, EXCEPT SEPARATE POWER SUPPLY FOR 600/3 ϕ /3 WIRE
- SUPPLY VOLTAGE:
- 115/1 ϕ
 - 208/1 ϕ (3 WIRE)
 - 240/1 ϕ
 - 277/1 ϕ
 - 480/1 ϕ (3 WIRE)
 - 208/3 ϕ (4 WIRE)
 - 480/3 ϕ (4 WIRE)
 - 600/3 ϕ (3 OR 4 WIRE)

OPTIONAL FEATURES


- AIR FLOW SWITCH
- CONTROL CIRCUIT FUSE
- DOOR INTERLOCK DISCONNECT SWITCH
- MAIN SUPPLY FUSE
- MOTOR FUSE
- SCR CONTROLS
- SCR-DAT CONTROLS
 - 0 to 10 Vdc CONTROL SIGNAL
 - 4 to 20 mA CONTROL SIGNAL
 - 24 VAC PULSE CONTROL
- DP - DUAL POINT POWER CONNECTION
- INSULATED EC SECTION

NOTES

- 70 CFM PER KW MINIMUM AIR FLOW ACROSS HEATER COILS.
- MINIMUM 0.2" w.g.(50 Pa) EXTERNAL STATIC PRESSURE TO OPERATE.
- ASSEMBLY ETL CERTIFIED TO UL1995 & CSA236.


ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE
ENGINEER:		
CUSTOMER:		GH
SUBMITTAL DATE:		267932
SPEC. SYMBOL:		09/26/2019
		ELECTRIC COILS CONSTANT VOLUME FDC SIZE 60

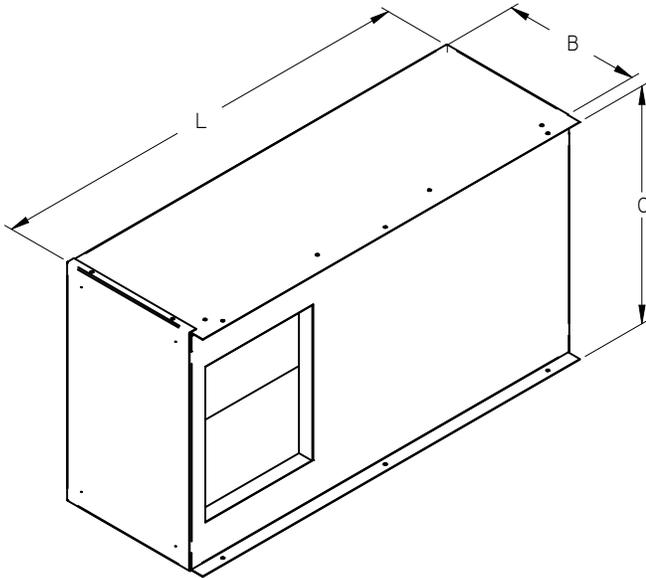

UNIT SIZE	IMPERIAL UNITS (inches)		
	L	B	C
10	28	9	15 1/4
20	38	15	18 1/2
30	38	15	18 1/2
40	38	17	18 1/2
50	41	17	20 1/8

UNIT SIZE	SI UNITS (mm)		
	L	B	C
10	711	229	387
20	965	381	470
30	965	381	470
40	965	432	470
50	1041	432	511


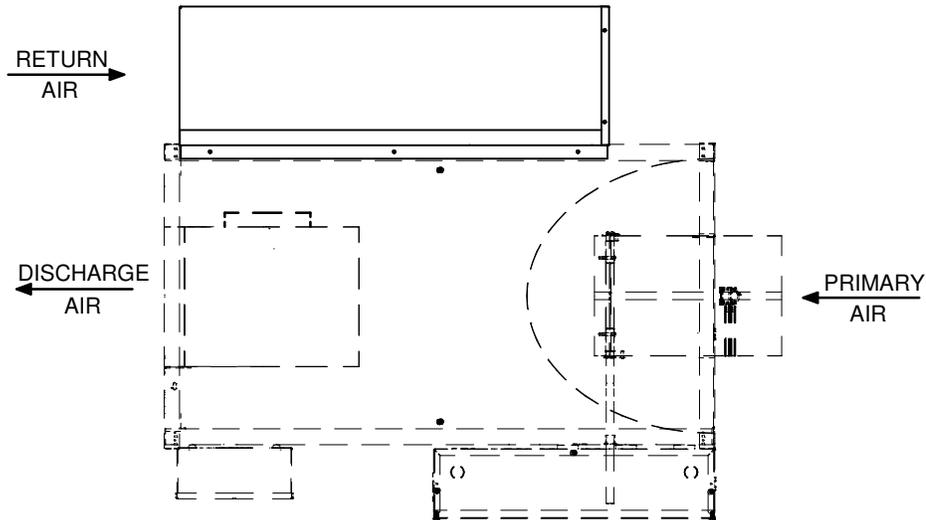


NOTES:

- 22 GA. GALVANIZED STEEL HOUSING, MECHANICALLY SEALED LEAK RESISTANT CONSTRUCTION.
- INTERNAL INSULATION - 1" (25mm) THICK, MIN. 1.5 LB/CU.FT DENSITY WHICH MEETS REQUIREMENTS OF NFPA90A AND UL181.
- ATTENUATOR LINER MATCHES THE UNIT LINER (EXCEPT FOR SM1 UNIT LINER COMES WITH PM1 ATTENUATOR LINER).

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE [®]
ENGINEER:		
CUSTOMER:		GH
SUBMITTAL DATE:		ATTENUATOR
SPEC. SYMBOL:		FAN POWERED TERMINALS
		INLET FDC
		SIZES 10-50
		267933
		09/26/2019

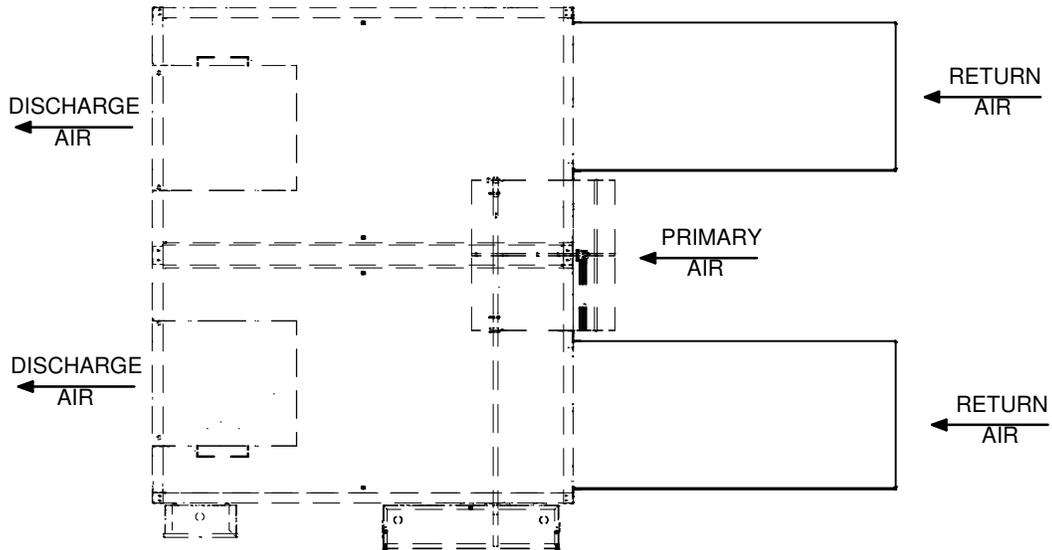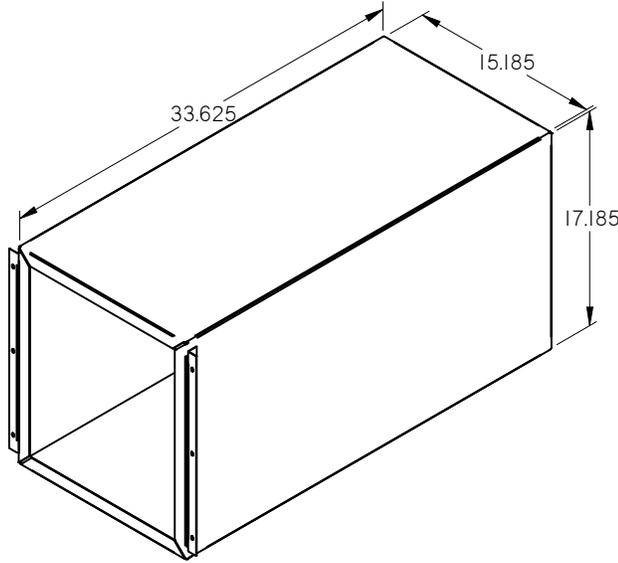


NOTES:

- 22 GA. GALVANIZED STEEL HOUSING, MECHANICALLY SEALED LEAK RESISTANT CONSTRUCTION.
- INTERNAL INSULATION - 1" (25mm) THICK, MIN. 1.5 LB/CU.FT DENSITY WHICH MEETS REQUIREMENTS OF NFPA90A AND UL181.
- ATTENUATOR LINER MATCHES THE UNIT LINER (EXCEPT FOR SM1 UNIT LINER COMES WITH PM1 ATTENUATOR LINER).

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		
ENGINEER:		
CUSTOMER:		
SUBMITTAL DATE:		267933
SPEC. SYMBOL:		09/26/2019
		ATTENUATOR FAN POWERED TERMINALS INLET FDC SIZE 60

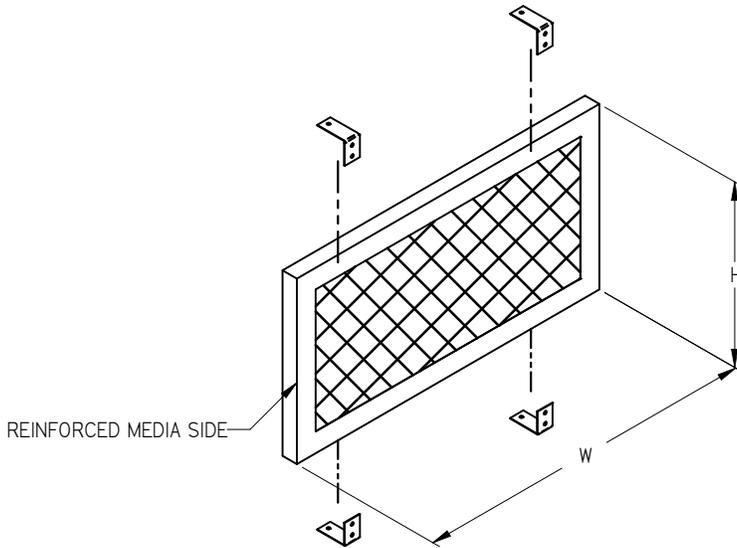


UNIT SIZE	IMPERIAL UNITS		S.I. UNITS	
	W	H	W	H
10	10	15 1/4	254	387
20	15 7/8	17 7/8	403	454
30	15 7/8	17 7/8	403	454
40	15 7/8	17 7/8	403	454
50	17 7/8	19 7/8	454	505
60*	15 3/4	19 7/8	400	505


*SIZE 60 REQUIRES 2 FILTERS

NOTES:

- 1"(25) NOMINAL FILTER MEDIA.
- CARDBOARD FRAME.
- MERV 3 RATING (THROWAWAY).
- FILTERS ARE CLIPPED TO TERMINAL CASING.

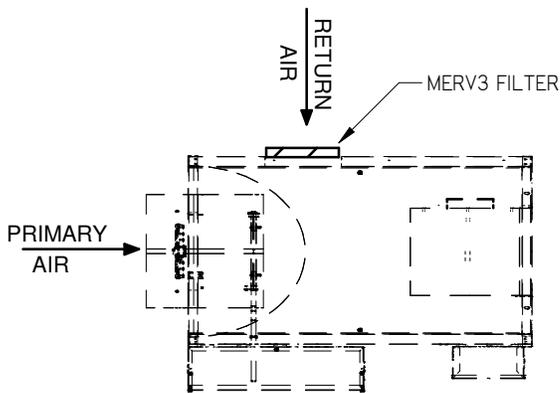


SIZES 10-50

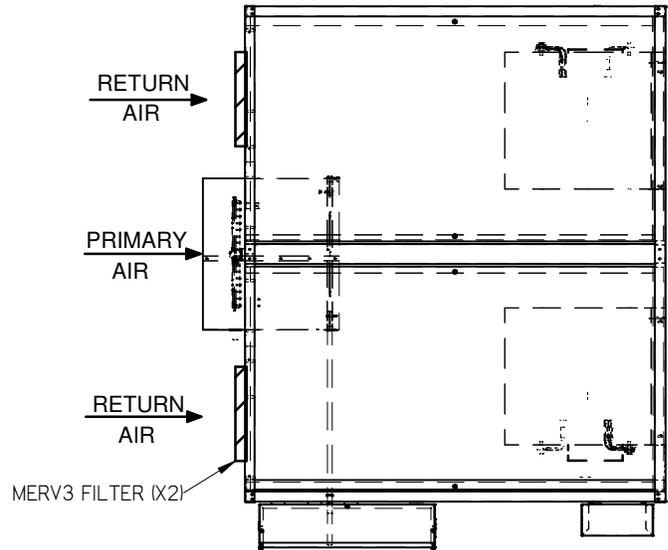

SIZE 60

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.


PROJECT:		<p>FILTERS FAN POWERED TERMINAL FDC SIZES 10-60 MERV3</p>
ENGINEER:		
CUSTOMER:		
SUBMITTAL DATE:		
SPEC. SYMBOL:		<p>GH</p> <p>267934</p> <p>09/26/2019</p>

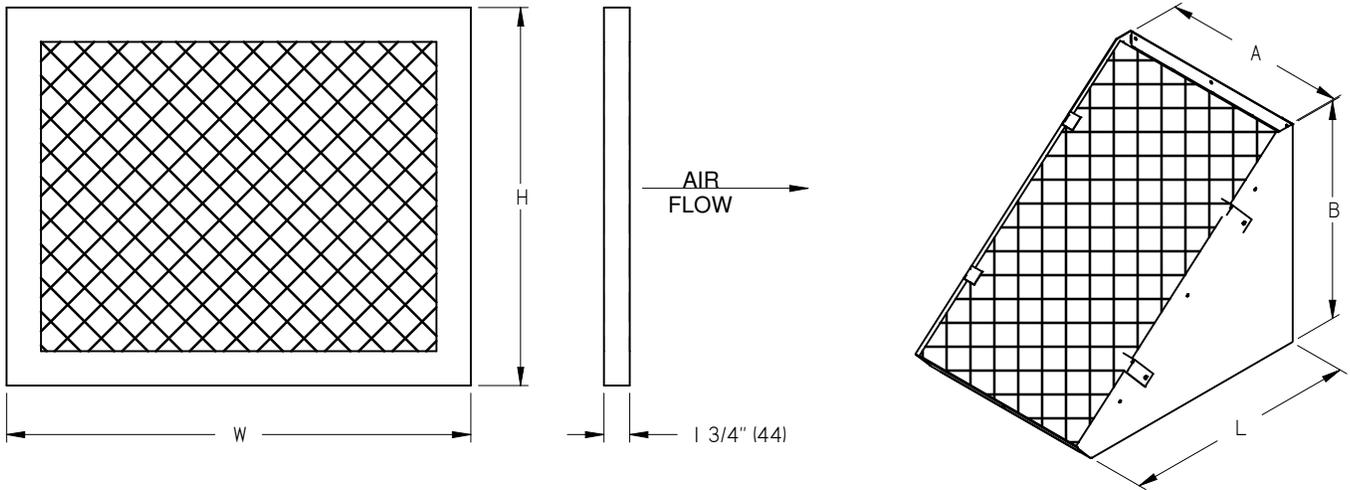


UNIT SIZE	IMPERIAL UNITS					S.I. UNITS				
	FILTER		BOOT SIZE			FILTER		BOOT SIZE		
	W	H	A	B	L	W	H	A	B	L
10	10 1/4	18	10 3/4	15 1/4	13	260	457	273	387	330
20	15	20 3/4	15 1/2	18 1/2	13	381	527	394	470	330
30	15	20 3/4	15 1/2	18 1/2	13	381	527	394	470	330
40	17 1/2	23 1/2	18	18 1/2	17 1/2	445	597	457	470	445
50	21 3/8	23 7/8	21 7/8	20 1/8	16 1/4	543	606	556	511	413
60*	16 1/4	25 1/4	16 3/4	20 1/8	18 1/2	413	641	425	511	470

- NOTES:
- 2" (51) NOMINAL FILTER MEDIA.
 - CARDBOARD FRAME.
 - MERV 8 RATING.
 - FILTER MOUNTED AS STANDARD ON RH CONFIGURATION AS SHOWN BELOW. UNITS WITH LH CONFIGURATION ARE FLIPPED, CAUSING THE FILTER BOOT TO FACE DOWN.

*SIZE 60 REQUIRES 2 FILTERS

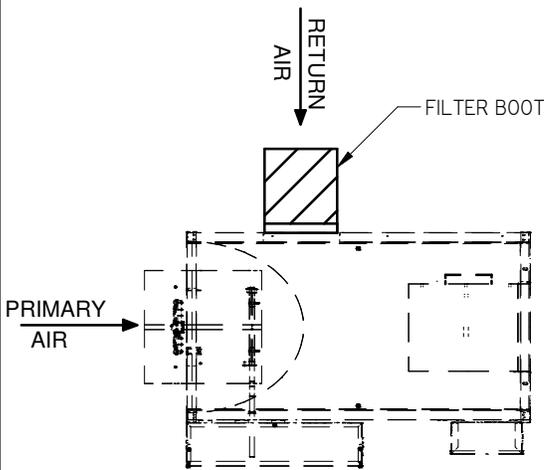

SIZES 10-50

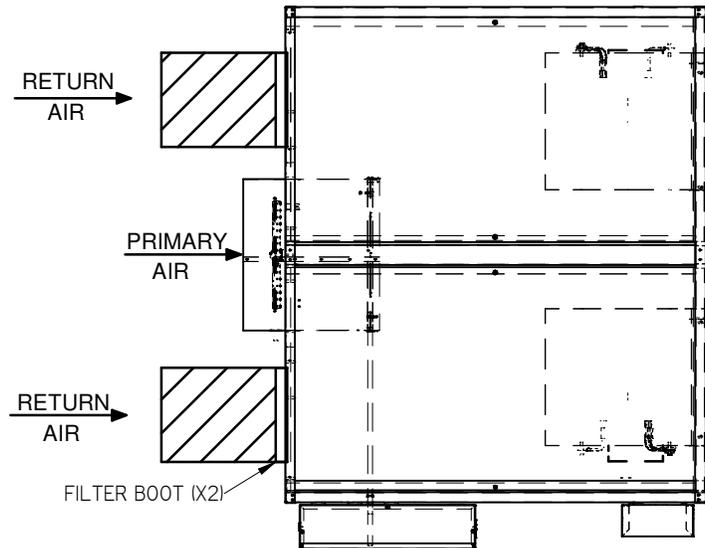

SIZE 60

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:

ENGINEER:

CUSTOMER:

SUBMITTAL DATE:

SPEC. SYMBOL:





GH

267934

09/26/2019

FILTERS
FAN POWERED TERMINAL
FDC
SIZES 10-60
MERV8

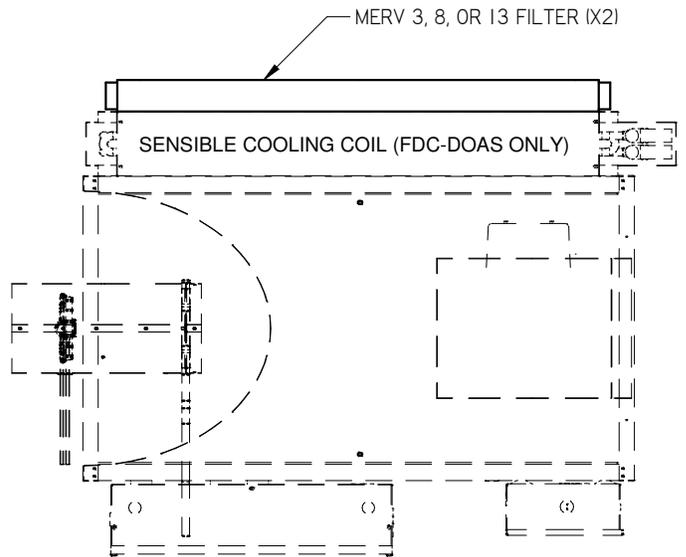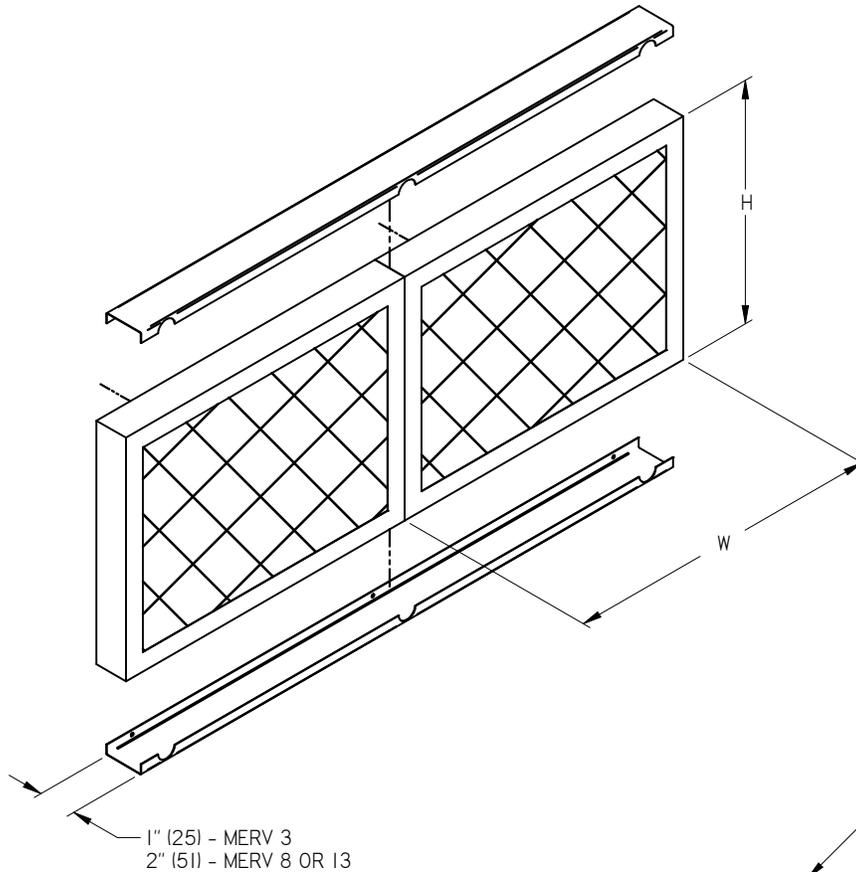



UNIT SIZE	IMPERIAL UNITS		S.I. UNITS	
	W	H	W	H
10	16 1/2	12 1/2	419	318
20	19	15	483	381
30	19	15	483	381
40	19	15	483	381
50	20 1/2	17 1/2	521	445

NOTES:

- 1" (51) NOMINAL FILTER MEDIA, FOR MERV 3 RATING (THROWAWAY).
- 2" (51) NOMINAL FILTER MEDIA, FOR MERV 8 OR 13 RATING.
- CARDBOARD FRAME.
- 2 FILTERS PER UNIT REQUIRED.

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE
ENGINEER:		
CUSTOMER:		GH
SUBMITTAL DATE:		267934
SPEC. SYMBOL:		09/26/2019
FILTERS FAN POWERED TERMINAL FDC DOAS SIZES 10-50 MERV 3, 8, OR 13		

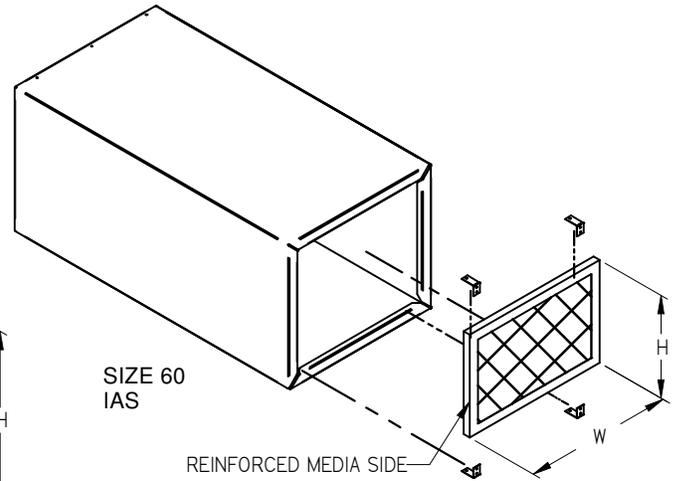
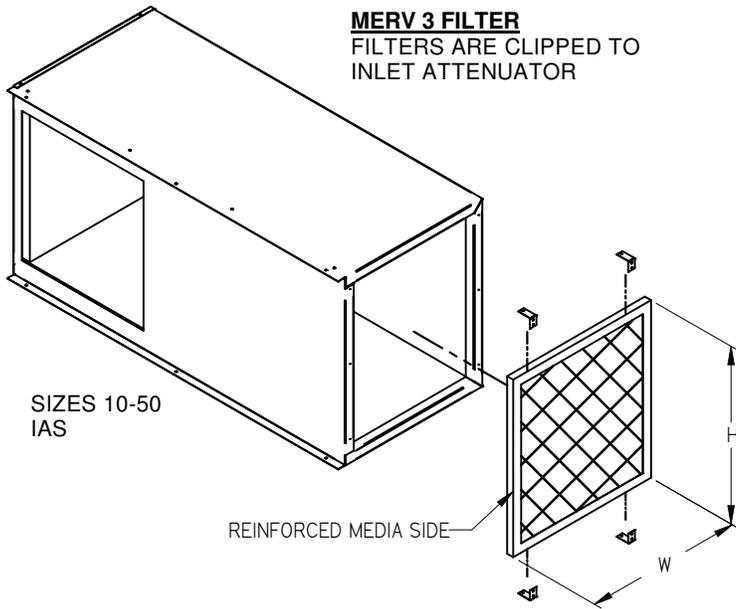


UNIT SIZE	IMPERIAL UNITS		S.I. UNITS	
	W	H	W	H
10	9	15 1/4	229	387
20	15	18 1/2	381	470
30	15	18 1/2	381	470
40	17	18 1/2	432	470
50	17	20 1/8	432	511
60*	15 1/2	17 1/2	394	445

*SIZE 60 REQUIRES 2 FILTERS




NOTES:

- 1"(25) NOMINAL FILTER MEDIA.
- CARDBOARD FRAME.
- MERV 3 RATING (THROWAWAY).

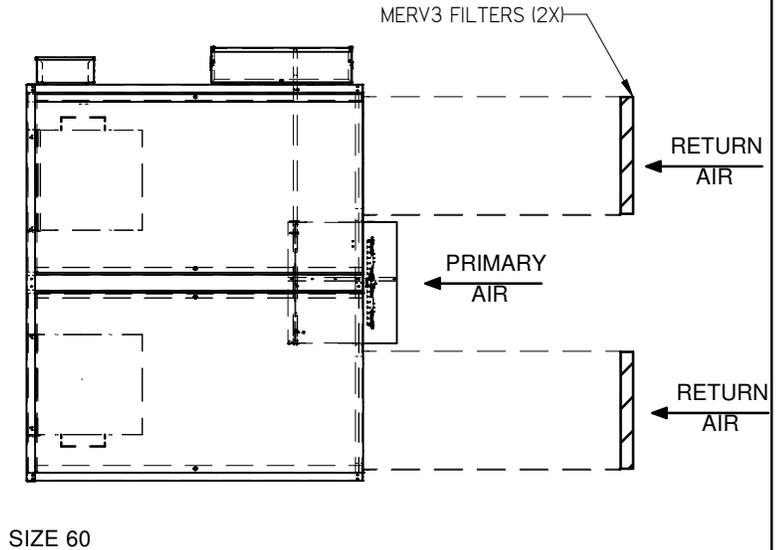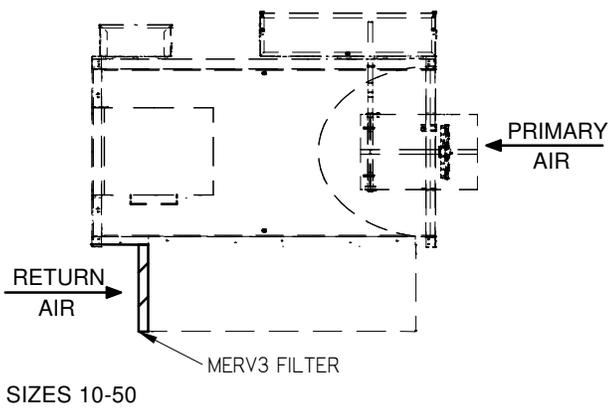

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.


PROJECT:		PRICE
ENGINEER:		
CUSTOMER:		GH
SUBMITTAL DATE:		268268
SPEC. SYMBOL:		09/26/2019
FILTERS FAN POWERED TERMINAL FDC SIZES 10-60 MERV3 W/ IAS		

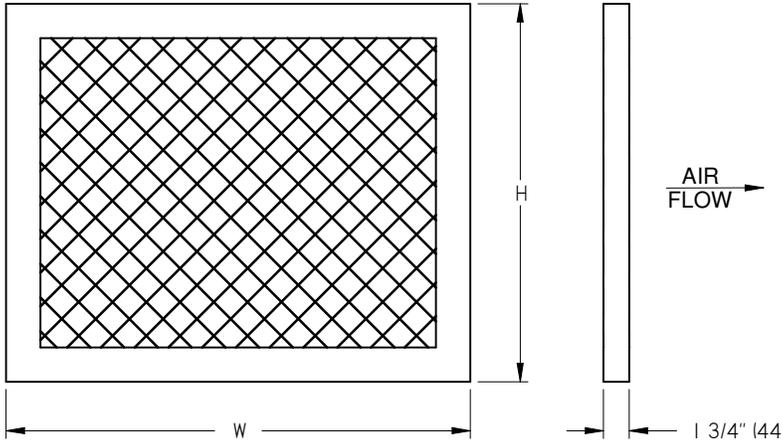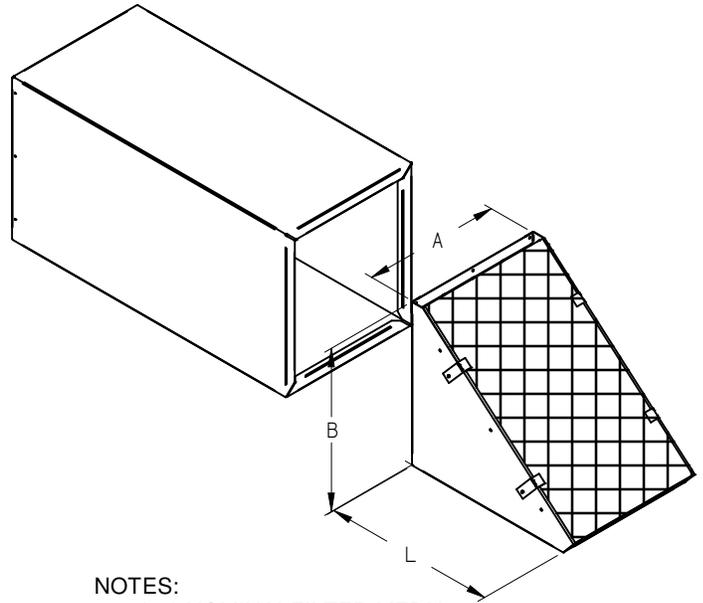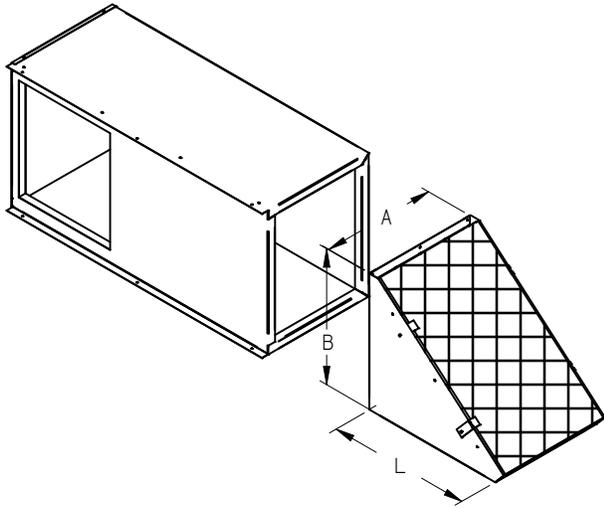

- NOTES:**
- 2" (51) NOMINAL FILTER MEDIA.
 - CARDBOARD FRAME.
 - MERV 8 RATING.
 - FILTER MOUNTED AS STANDARD ON RH CONFIGURATION AS SHOWN BELOW. UNITS WITH LH CONFIGURATION ARE FLIPPED, CAUSING THE FILTER BOOT TO FACE DOWN.


UNIT SIZE	IMPERIAL UNITS					S.I. UNITS				
	FILTER		BOOT SIZE			FILTER		BOOT SIZE		
	W	H	A	B	L	W	H	A	B	L
10	10 1/4	18	10 3/4	15 1/4	13	260	457	273	387	330
20	15	20 3/4	15 1/2	18 1/2	13	381	527	394	470	330
30	15	20 3/4	15 1/2	18 1/2	13	381	527	394	470	330
40	17 1/2	23 1/2	18	18 1/2	17 1/2	445	597	457	470	445
50	21 3/8	23 7/8	21 7/8	20 1/8	16 1/4	543	606	556	511	413
60*	16 1/4	25 1/4	16 3/4	17 2/5	21	413	641	425	442	533

*SIZE 60 REQUIRES 2 FILTERS

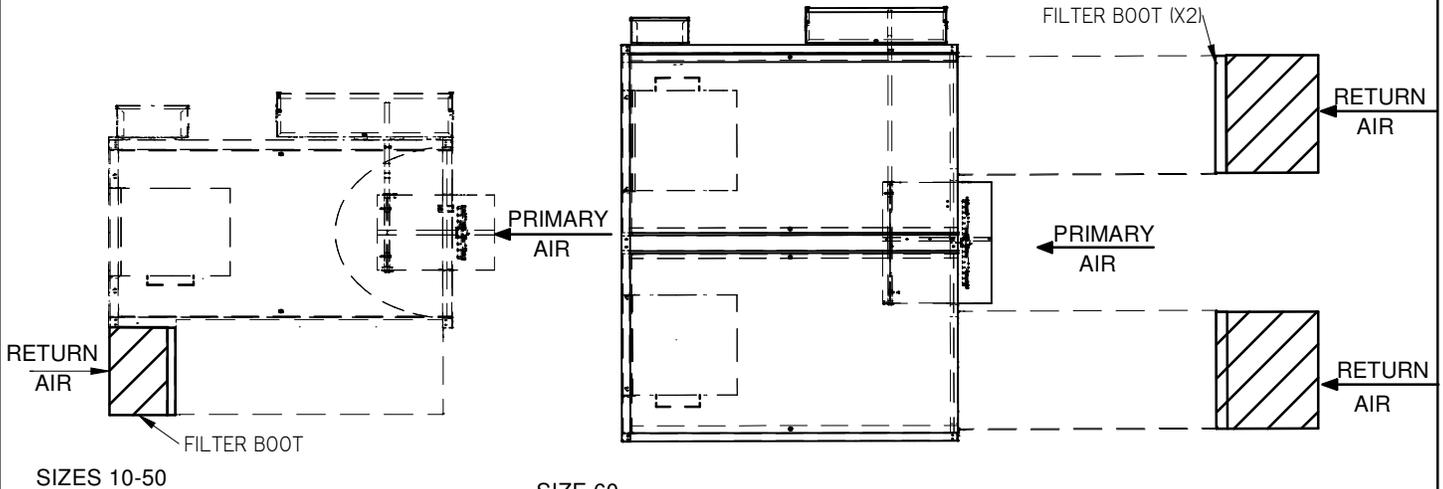


ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.


PROJECT:		PRICE
ENGINEER:		
CUSTOMER:		FILTERS
SUBMITTAL DATE:		FAN POWERED TERMINAL FDC SIZES 10-60 MERV8 W/ IAS
SPEC. SYMBOL:		268268
		09/26/2019

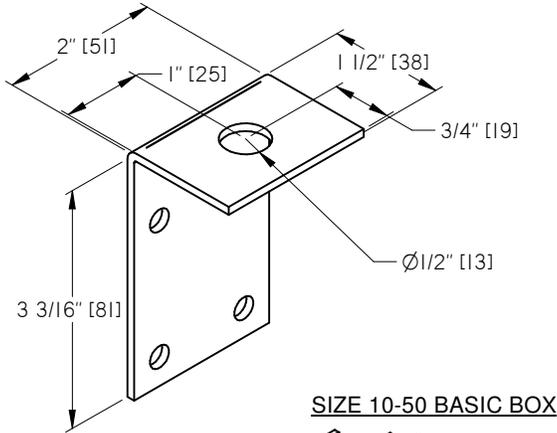


SIZE 10-50 BASIC BOX

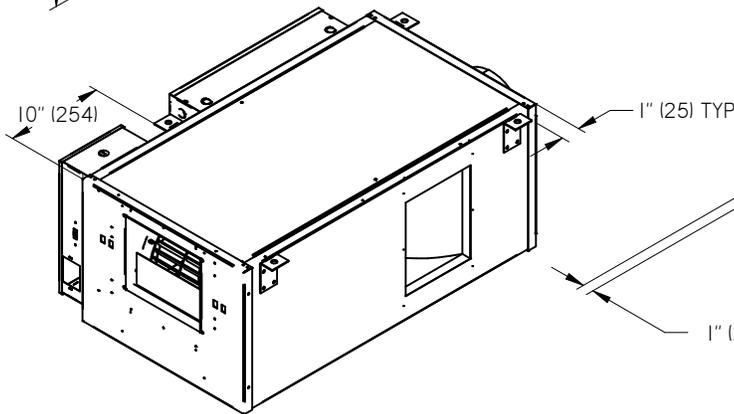


SIZE 10-50 w/IAS

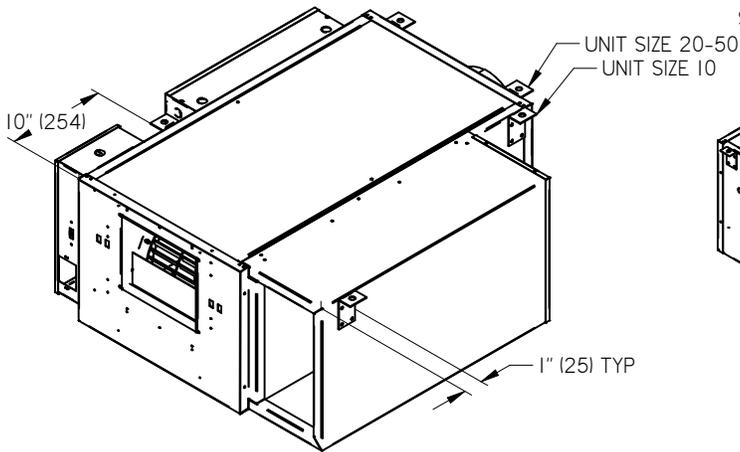

SIZE 60 BASIC BOX

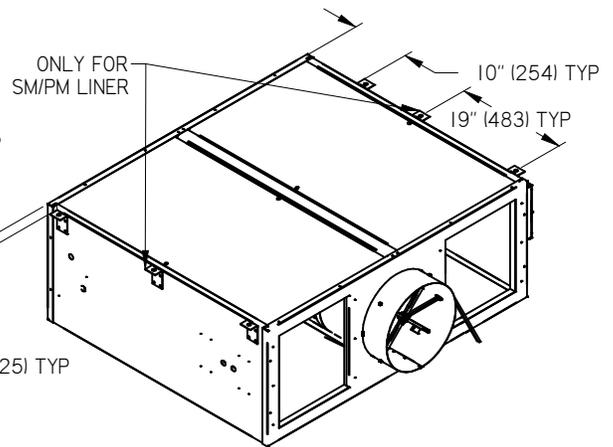






SIZE 60 w/IAS

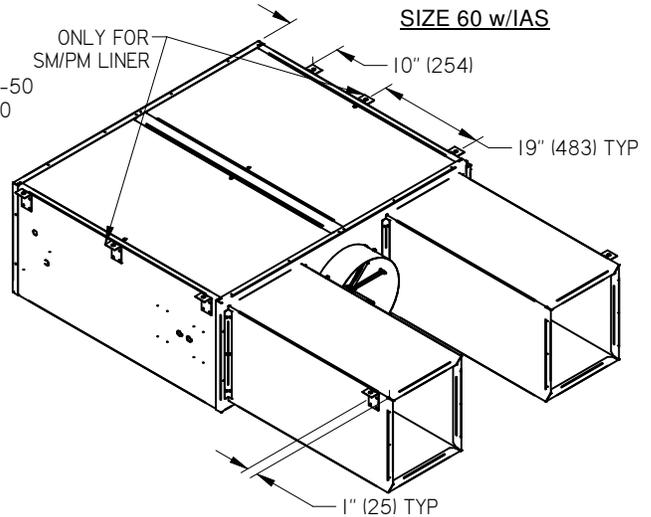

- NOTES:**
- HANGER BRACKETS ARE 12 GAUGE ZINC COATED STEEL.
 - 4 PER UNIT (6 FOR SIZE 60 W/IAS).
 - 2 PER DISCHARGE ATTENUATOR OR SILENCER.
 - 2 PER ELECTRIC AND WATER COIL FOR SIZE 60 ONLY.
 - BRACKETS ARE SHIPPED LOOSE FOR FIELD INSTALLATION FOR USE WITH THREADED HANGER RODS (BY OTHERS).
 - LAYOUT INDICATES SUGGESTED HANGER BRACKET LOCATIONS.

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.


PROJECT:		PRICE	ACCESSORIES HANGER BRACKETS [HB] LOCATIONS FOR FDC
ENGINEER:			
CUSTOMER:		267935	
SUBMITTAL DATE:	SPEC. SYMBOL:	01/12/2021	

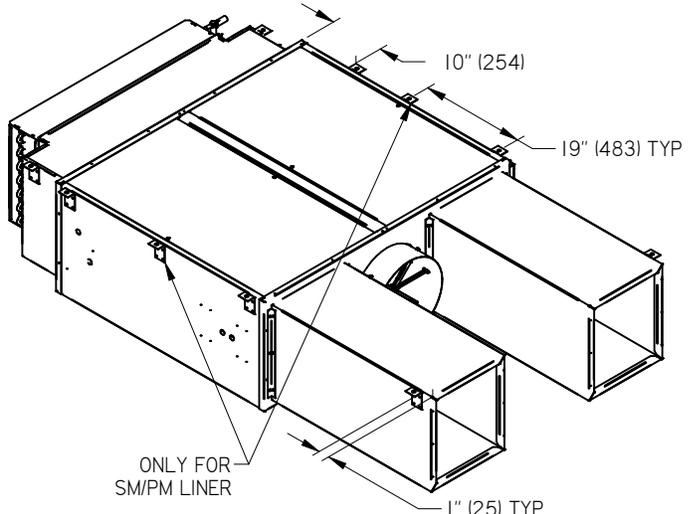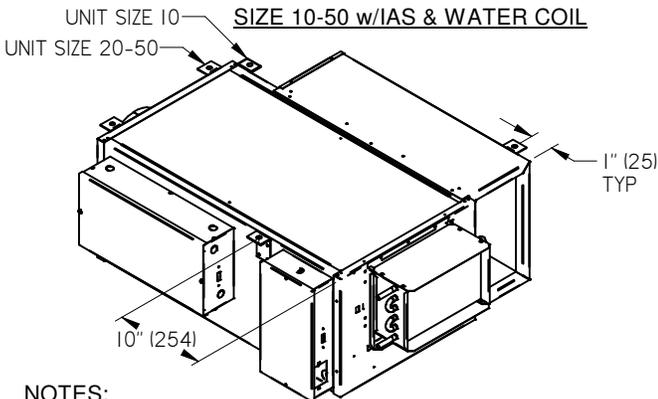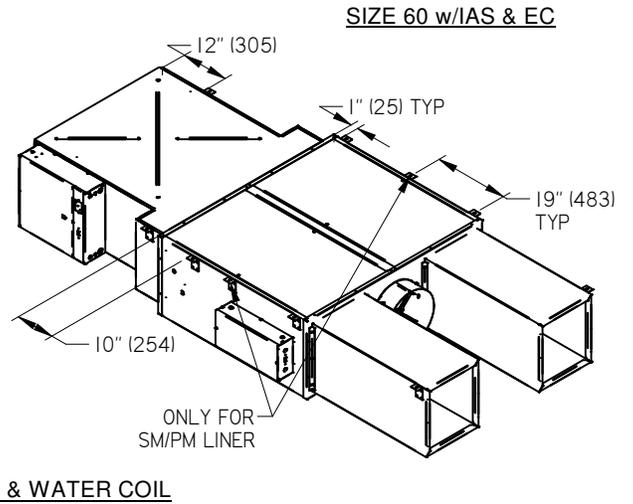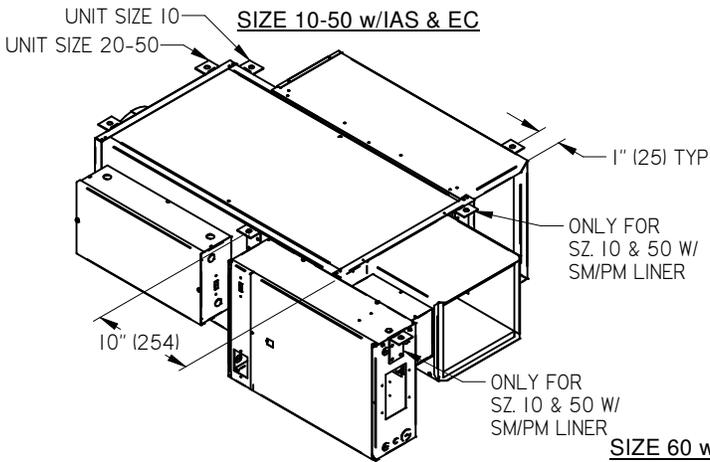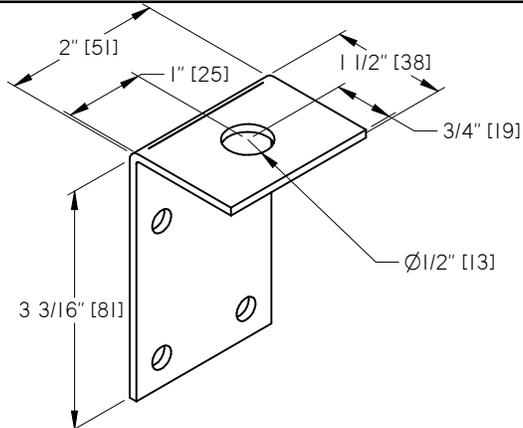


- NOTES:**
- HANGER BRACKETS ARE 12 GAUGE ZINC COATED STEEL.
 - 4 PER UNIT (6 FOR SIZE 60 W/IAS).
 - 2 PER DISCHARGE ATTENUATOR OR SILENCER.
 - 2 PER ELECTRIC AND WATER COIL FOR SIZE 60 ONLY.
 - 2 ADDITIONAL HANGER BRACKETS WHEN ELECTRIC COIL & SM/PM LINER IS SELECTED FOR SIZE 10 & 50 ONLY.
 - BRACKETS ARE SHIPPED LOOSE FOR FIELD INSTALLATION FOR USE WITH THREADED HANGER RODS (BY OTHERS).
 - LAYOUT INDICATES SUGGESTED HANGER BRACKET LOCATIONS.

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.


PROJECT:		PRICE	ACCESSORIES HANGER BRACKETS [HB] LOCATIONS FOR FDC
ENGINEER:			
CUSTOMER:		267935	
SUBMITTAL DATE:	SPEC. SYMBOL:	01/12/2021	

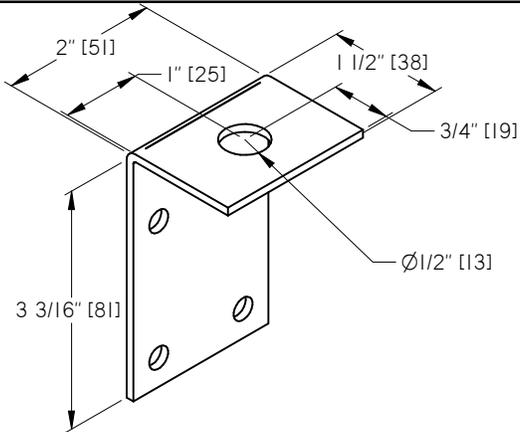


SIZE 10-50 w/DAS (&EC, WATER COIL, IAS)

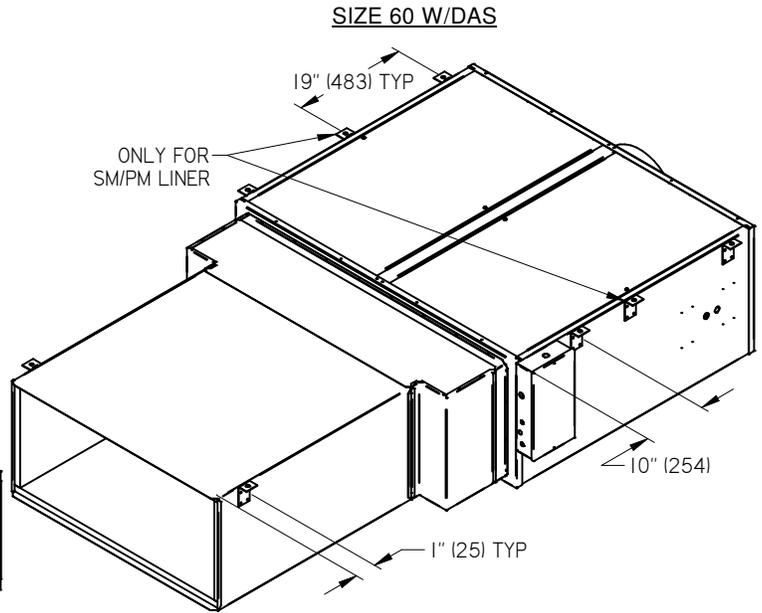


SIZE 60 W/DAS

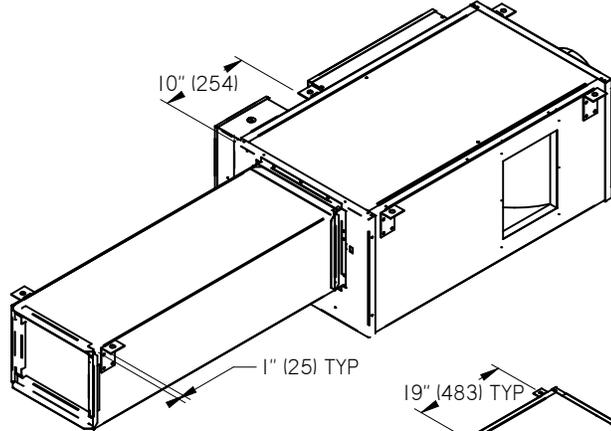

SIZE 60 w/DAS & EC

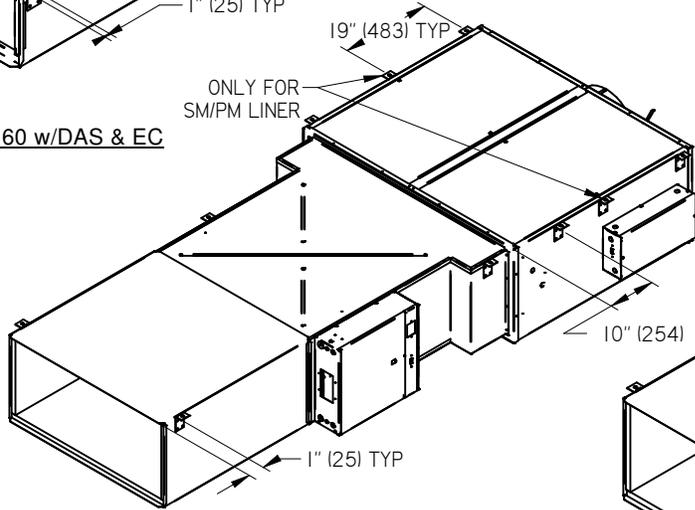

SIZE 60 w/DAS & WATER COIL


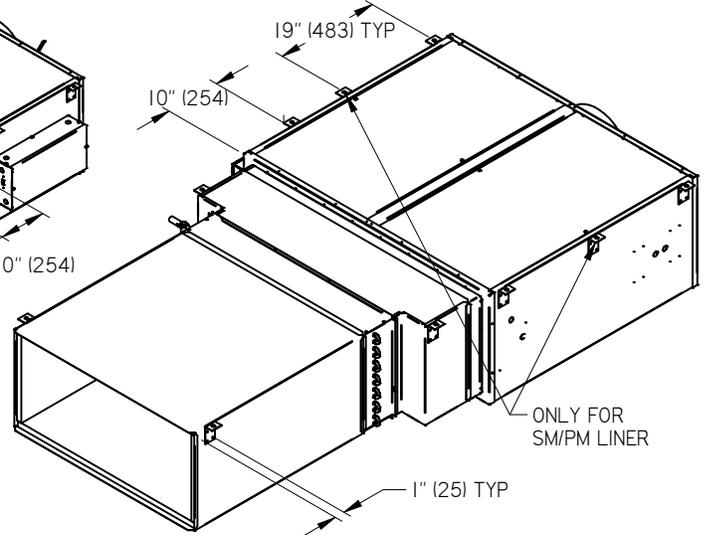


NOTES:


- HANGER BRACKETS ARE 12 GAUGE ZINC COATED STEEL.
- 4 PER UNIT (6 FOR SIZE 60 W/IAS).
- 2 PER DISCHARGE ATTENUATOR OR SILENCER.
- 2 PER ELECTRIC AND WATER COIL FOR SIZE 60 ONLY.
- BRACKETS ARE SHIPPED LOOSE FOR FIELD INSTALLATION FOR USE WITH THREADED HANGER RODS (BY OTHERS).
- LAYOUT INDICATES SUGGESTED HANGER BRACKET LOCATIONS.

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.


PROJECT:		PRICE	ACCESSORIES HANGER BRACKETS [HB] LOCATIONS FOR FDC
ENGINEER:			
CUSTOMER:		267935	
SUBMITTAL DATE:	SPEC. SYMBOL:	01/12/2021	

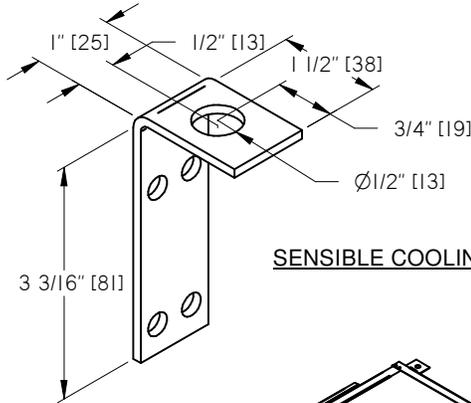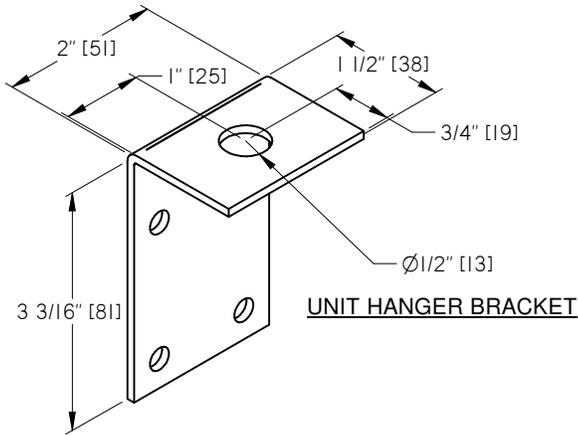


**SIZE 10-50
DOAS BASIC BOX**

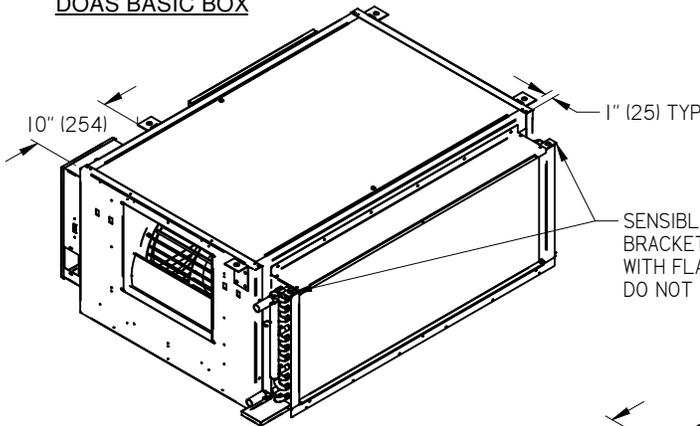

**SIZE 10-50
DOAS W/ RSLR1**

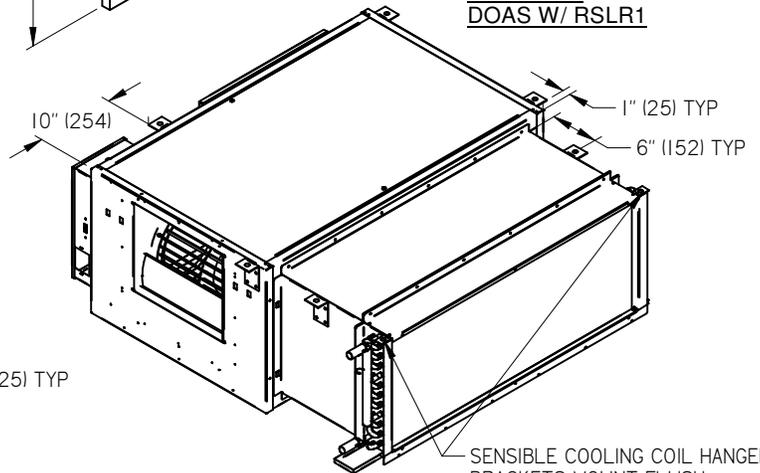

**SIZE 10-50
DOAS W/RSLR3**




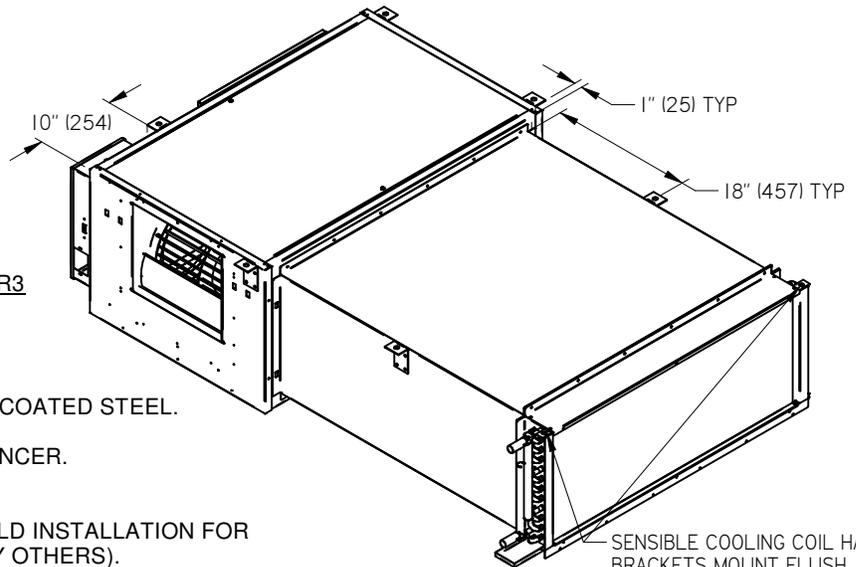


NOTES:

- HANGER BRACKETS ARE 12 GAUGE ZINC COATED STEEL.
- 4 PER UNIT.
- 2 PER DISCHARGE ATTENUATOR OR SILENCER.
- 2 PER RETURN SILENCER.
- 2 PER SENSIBLE COOLING COIL.
- BRACKETS ARE SHIPPED LOOSE FOR FIELD INSTALLATION FOR USE WITH THREADED HANGER RODS (BY OTHERS).
- LAYOUT INDICATES SUGGESTED HANGER BRACKET LOCATIONS.

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE	ACCESSORIES HANGER BRACKETS [HB] LOCATIONS FOR FDC DOAS
ENGINEER:			
CUSTOMER:		267935	
SUBMITTAL DATE:	SPEC. SYMBOL:	01/12/2021	

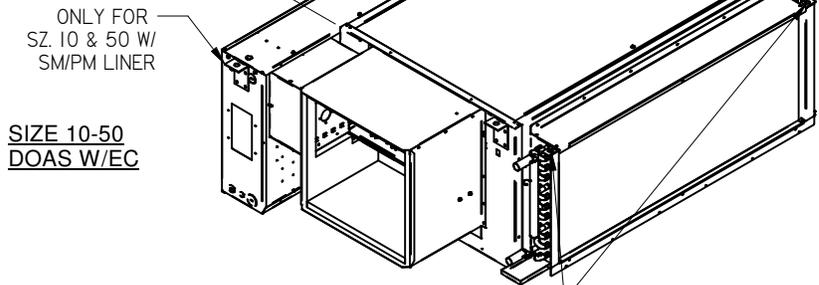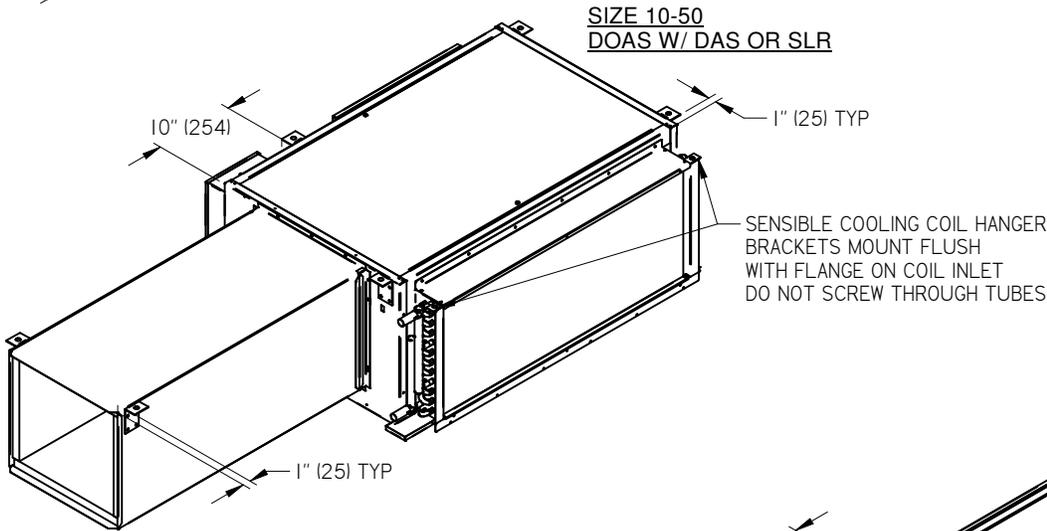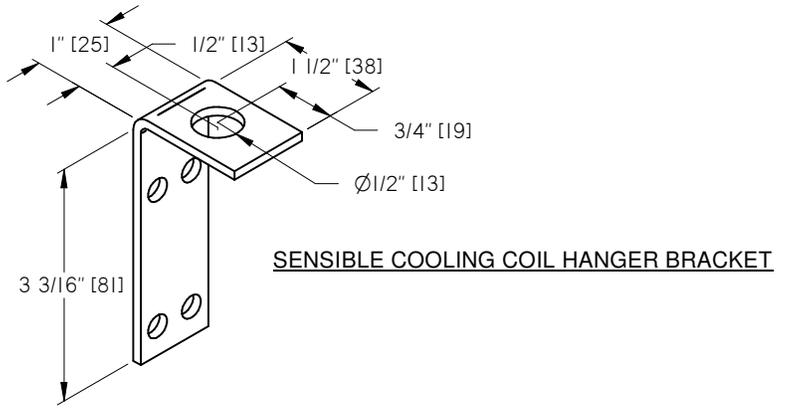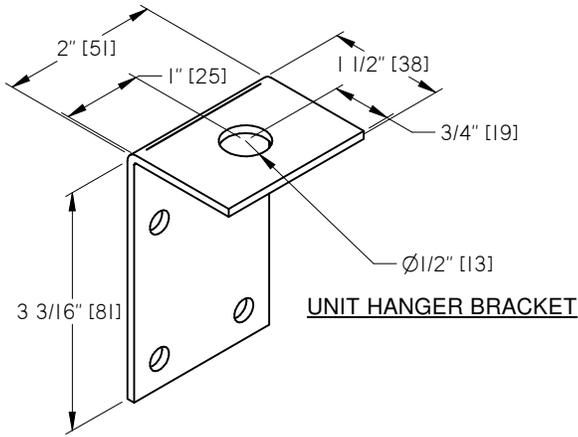


NOTES:

- HANGER BRACKETS ARE 12 GAUGE ZINC COATED STEEL.
- 4 PER UNIT.
- 2 PER DISCHARGE ATTENUATOR OR SILENCER.
- 2 PER RETURN SILENCER.
- 2 PER SENSIBLE COOLING COIL.
- BRACKETS ARE SHIPPED LOOSE FOR FIELD INSTALLATION FOR USE WITH THREADED HANGER RODS (BY OTHERS).
- LAYOUT INDICATES SUGGESTED HANGER BRACKET LOCATIONS.

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE	ACCESSORIES HANGER BRACKETS [HB] LOCATIONS FOR FDC DOAS
ENGINEER:			
CUSTOMER:		267935	
SUBMITTAL DATE:	SPEC. SYMBOL:	01/12/2021	

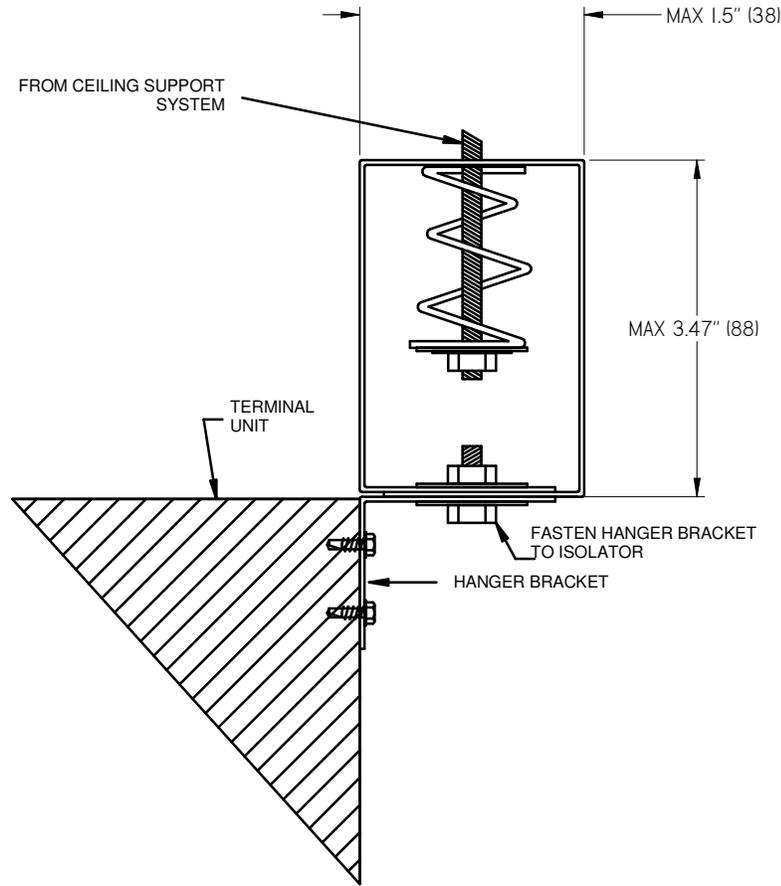

PRODUCT	HBS QTY REQUIRED								
	BASE UNIT	DAS/SLR	IAS	EC/WC	EC+SM/PM LINER	SM/PM LINER	RSLR1	RSLR3	DOAS SENSIBLE COOLING COIL
FDC 10	RED (X4)	RED (X2)	-	-	RED (X2)	-	-	-	-
FDC 20-40	YELLOW (X4)	RED (X2)	-	-	-	-	-	-	-
FDC 50	YELLOW (X4)	RED (X2)	-	-	YELLOW (X2)	-	-	-	-
FDC 60	YELLOW (X4)	RED (X2)	RED (X2)	YELLOW (X2)	-	YELLOW (X2)	-	-	-
FDC DOAS 10	RED (X4)	RED (X2)	-	-	RED (X1)	-	RED (X2)	YELLOW (X2)	RED (X2)
FDC DOAS 20-40	YELLOW (X4)	RED (X2)	-	-	-	-	RED (X2)	YELLOW (X2)	RED (X2)
FDC DOAS 50	YELLOW (X4)	RED (X2)	-	-	YELLOW (X1)	-	RED (X2)	YELLOW (X2)	RED (X2) SEE NOTE 1


NOTES:

- HBS ARE SHIPPED LOOSE FOR FIELD INSTALLATION BY OTHERS, UNLESS OTHERWISE NOTED ON ORDER
- NUMBER OF HBS SHIPPED PER UNIT ACCORDING TO THE REFERENCE CHARTS ABOVE
- RED SPRING LOAD RANGE: 16 LBS - 35 LBS
- YELLOW SPRING LOAD RANGE: 36 LBS - 65 LBS
- NOTE 1: FOR 6 & 8 ROW SENSIBLE COOLING COIL ON SIZE 50, USE YELLOW (X2)

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		
ENGINEER:		
CUSTOMER:		
SUBMITTAL DATE:		267935
SPEC. SYMBOL:		01/12/2021
ACCESSORIES HANGER BRACKETS [HB] LOCATIONS FOR FDC & FDC DOAS HBS		

FDC SIZE 10-50

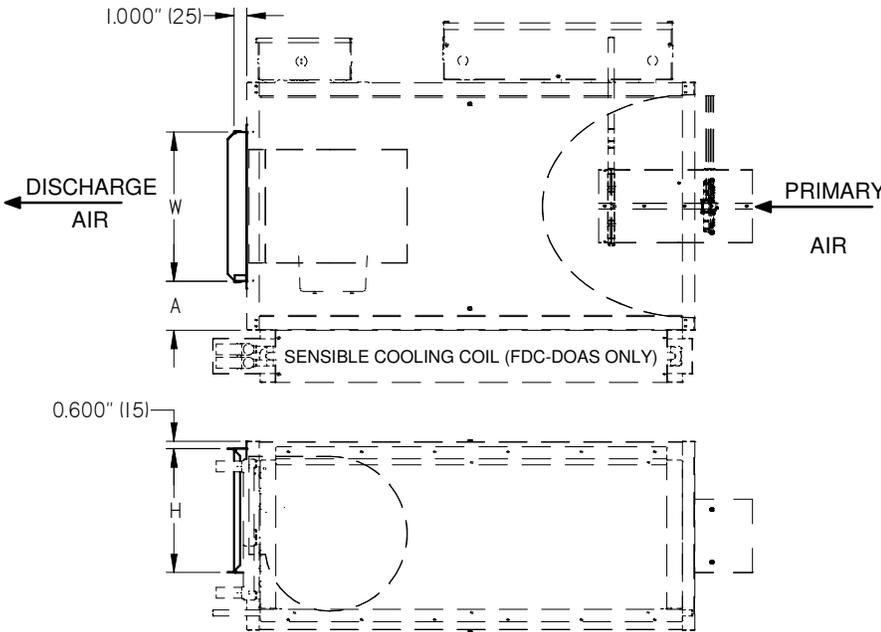


IMPERIAL UNITS (INCHES)			
Unit Size	W	H	A
10	12	10	4
20	16	15	5
30	16	15	5
40	16	15	5
50	20	17 1/2	5

SI UNITS (mm)			
Unit Size	W	H	A
10	305	254	102
20	406	381	127
30	406	381	127
40	406	381	127
50	508	445	127

NOTES:

- MADE FROM 22 GA GALVANIZED STEEL CONSTRUCTION
- SLIP AND DRIVE CONNECTION

FDC SIZE 60


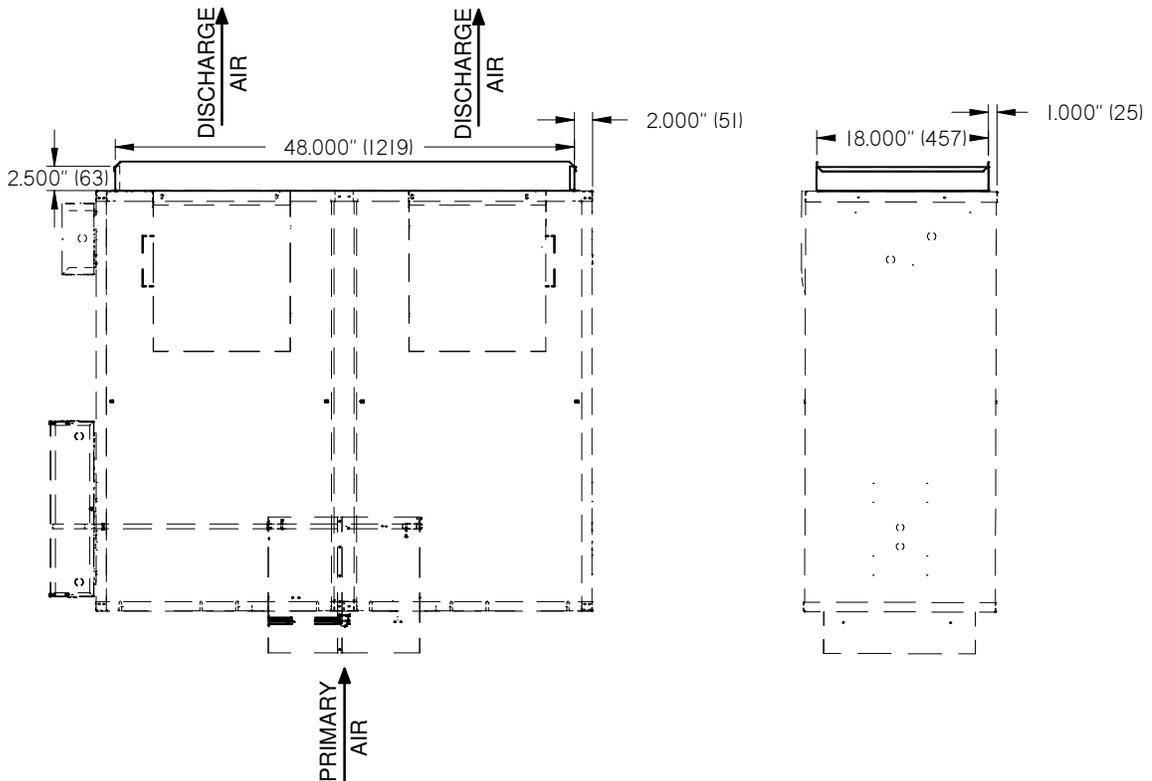


ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE
ENGINEER:		
CUSTOMER:		GH
SUBMITTAL DATE:		268618
SPEC. SYMBOL:		09/26/2019
DISCHARGE COLLAR FAN POWERED TERMINALS CONSTANT VOLUME FDC-1-X & FDC DOAS SIZES 10 TO 50		

UNIT SIZE	IMPERIAL UNITS (inches)			
	WITHOUT COIL OR WITH STANDARD COIL		WITH HIGH CAPACITY COIL	
	B	C	B	C
10	12	10	14	12 1/2
20	16	15	20	17 1/2
30	16	15	20	17 1/2
40	16	15	20	17 1/2
50	20	17 1/2	28	17 1/2

UNIT SIZE	SI UNITS (mm)			
	WITHOUT COIL OR WITH STANDARD COIL		WITH HIGH CAPACITY COIL	
	B	C	B	C
10	305	254	356	318
20	406	381	508	445
30	406	381	508	445
40	406	381	508	445
50	508	445	711	445

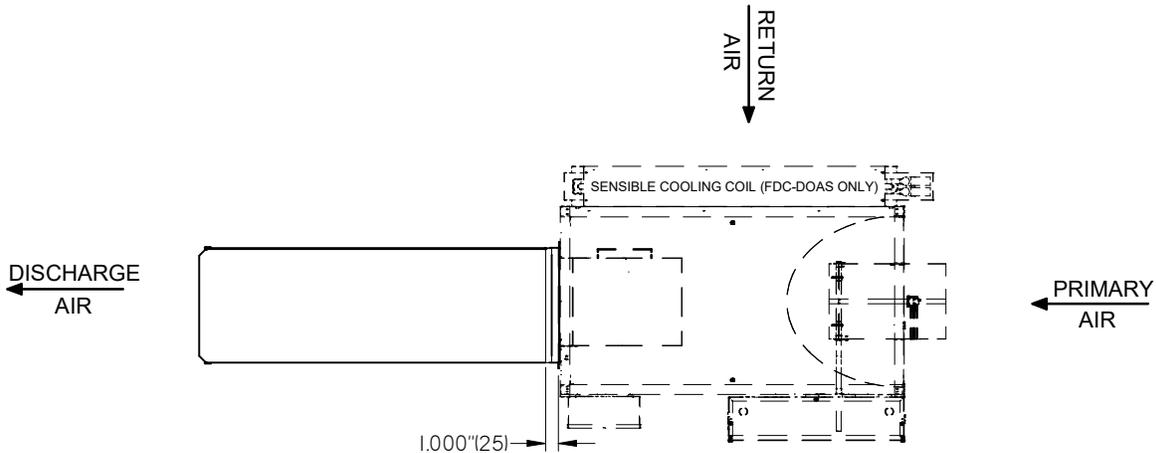
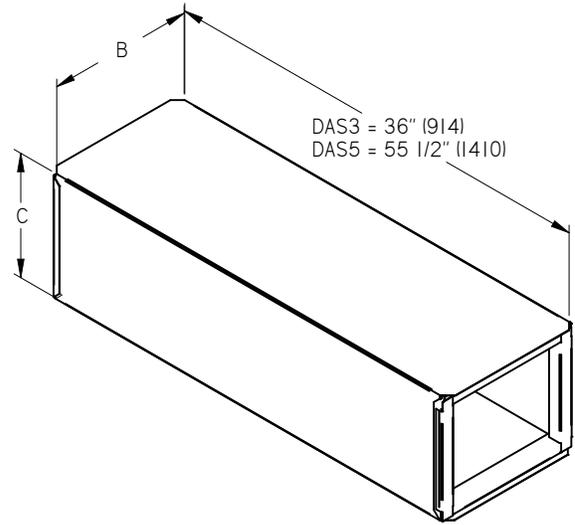


NOTES:

- 22 GA. GALVANIZED STEEL HOUSING, MECHANICALLY SEALED LEAK RESISTANT CONSTRUCTION.
- INSULATION TYPE WILL MATCH THE UNIT INSULATION TYPE.
- DISCHARGE ATTENUATORS SHIPPED LOOSE WITH SLIP AND DRIVE CLEATS WHERE REQUIRED.
- SLIP AND DRIVE CONNECTION (DISCHARGE COLLAR IS PROVIDED).

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE
ENGINEER:		
CUSTOMER:		G ATTENUATOR
SUBMITTAL DATE:		268659
SPEC. SYMBOL:		FAN POWERED TERMINALS DISCHARGE FDC & FDC DOAS SIZES 10-50
		12/05/2022

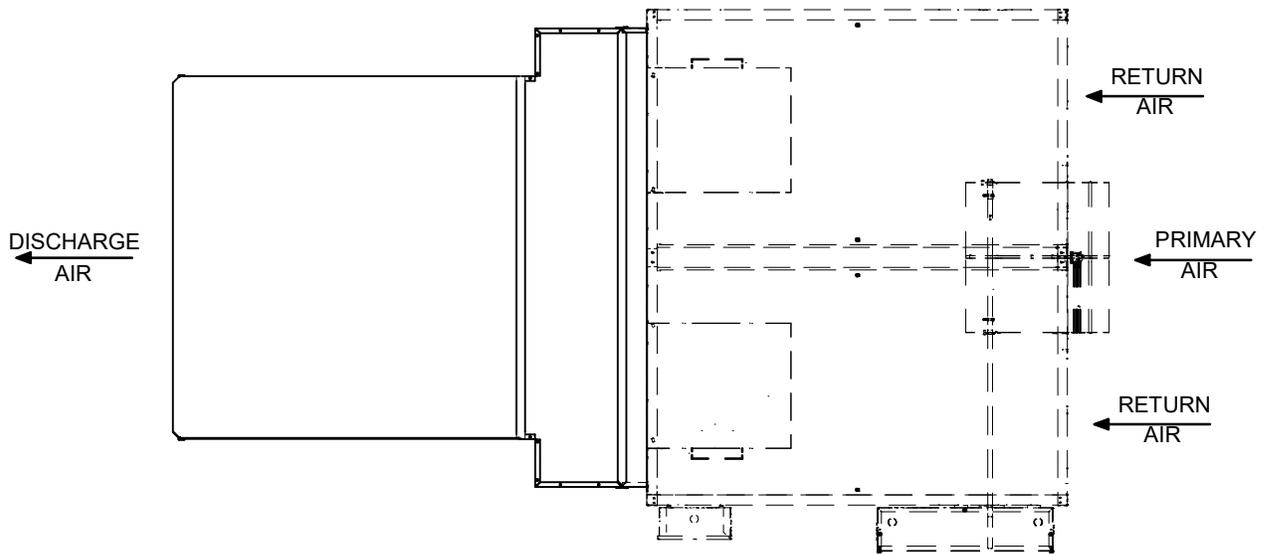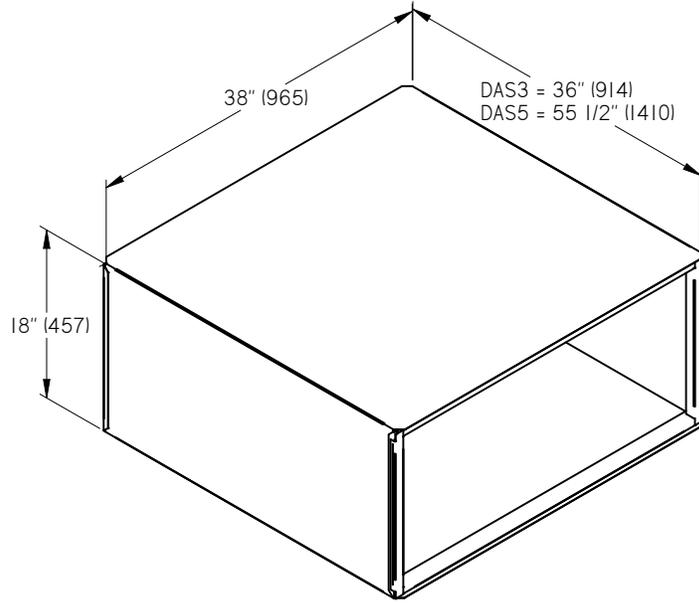

NOTES:



- 22 GA. GALVANIZED STEEL HOUSING, MECHANICALLY SEALED LEAK RESISTANT CONSTRUCTION.
- INSULATION TYPE WILL MATCH THE UNIT INSULATION TYPE.
- DISCHARGE ATTENUATORS SHIPPED LOOSE WITH SLIP AND DRIVE CLEATS WHERE REQUIRED.
- SLIP AND DRIVE CONNECTION (DISCHARGE COLLAR IS PROVIDED).

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE [®]	ATTENUATOR FAN POWERED TERMINALS DISCHARGE FDC SIZE 60
ENGINEER:			
CUSTOMER:		268659	
SUBMITTAL DATE:	SPEC. SYMBOL:	12/05/2022	

UNIT SIZE	IMPERIAL UNITS (inches)	
	B	C
20	16	15
30	16	15
40	16	15
50	20	17 1/2

UNIT SIZE	SI UNITS (mm)	
	B	C
20	406	381
30	406	381
40	406	381
50	508	445

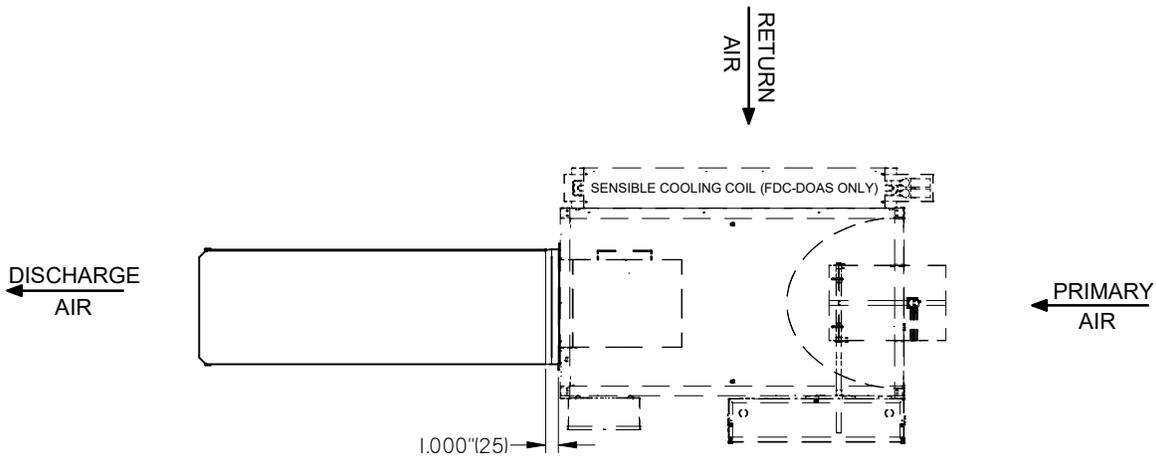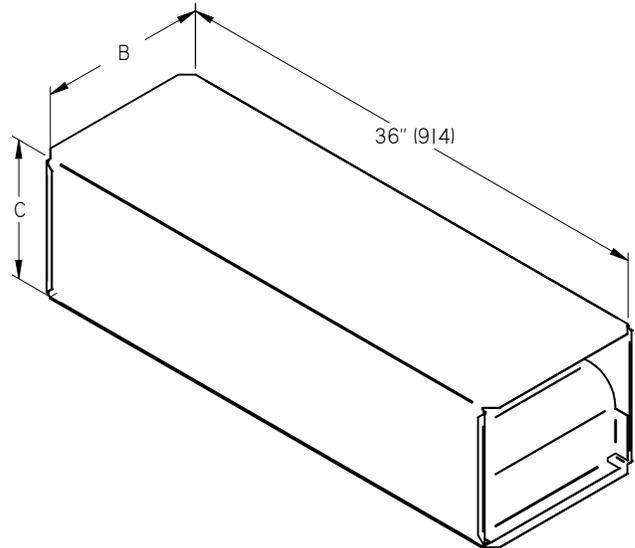

NOTES:



- 22 GA. GALVANIZED STEEL HOUSING, MECHANICALLY SEALED LEAK RESISTANT CONSTRUCTION.
- SILENCER WITH PERFORATED LINER OVER ACOUSTIC FIBERGLASS MEDIA.
- DISCHARGE SILENCERS SHIPPED LOOSE WITH SLIP AND DRIVE CLEATS WHERE REQUIRED.
- SLIP AND DRIVE CONNECTION (DISCHARGE COLLAR IS PROVIDED).

OPTIONAL LINERS:

- FC - FIBERGLASS CLOTH
- PL - POLYMER LINER

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE
ENGINEER:		
CUSTOMER:		4
SUBMITTAL DATE:		268660
SPEC. SYMBOL:		09/26/2019
ATTENUATOR FAN POWERED TERMINALS DISCHARGE SILENCER FDC & FDC DOAS SIZES 20-50		

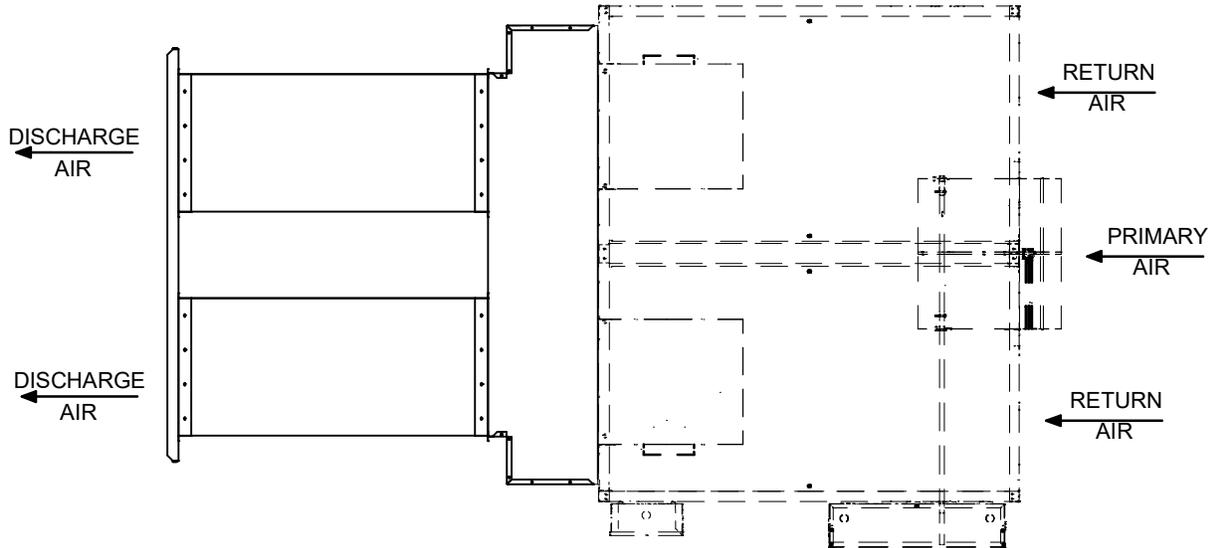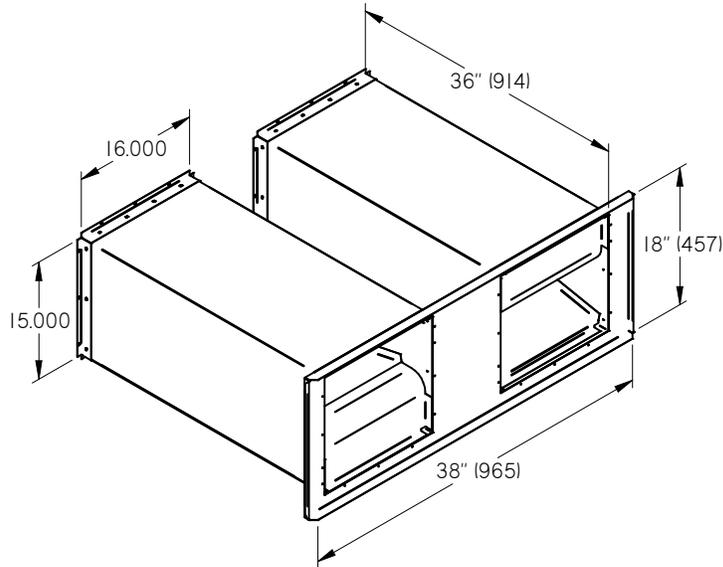

NOTES:


- 22 GA. GALVANIZED STEEL HOUSING, MECHANICALLY SEALED LEAK RESISTANT CONSTRUCTION.
- SILENCER WITH PERFORATED LINER OVER ACOUSTIC FIBERGLASS MEDIA.
- DISCHARGE SILENCERS SHIPPED LOOSE WITH SLIP AND DRIVE CLEATS WHERE REQUIRED.
- SLIP AND DRIVE CONNECTION (DISCHARGE COLLAR IS PROVIDED).

OPTIONAL LINERS:

- FC - FIBERGLASS CLOTH
- PL - POLYMER LINER

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		
ENGINEER:		
CUSTOMER:		
SUBMITTAL DATE:		268660
SPEC. SYMBOL:		09/26/2019
		ATTENUATOR FAN POWERED TERMINALS DISCHARGE SILENCER FDC SIZE 60

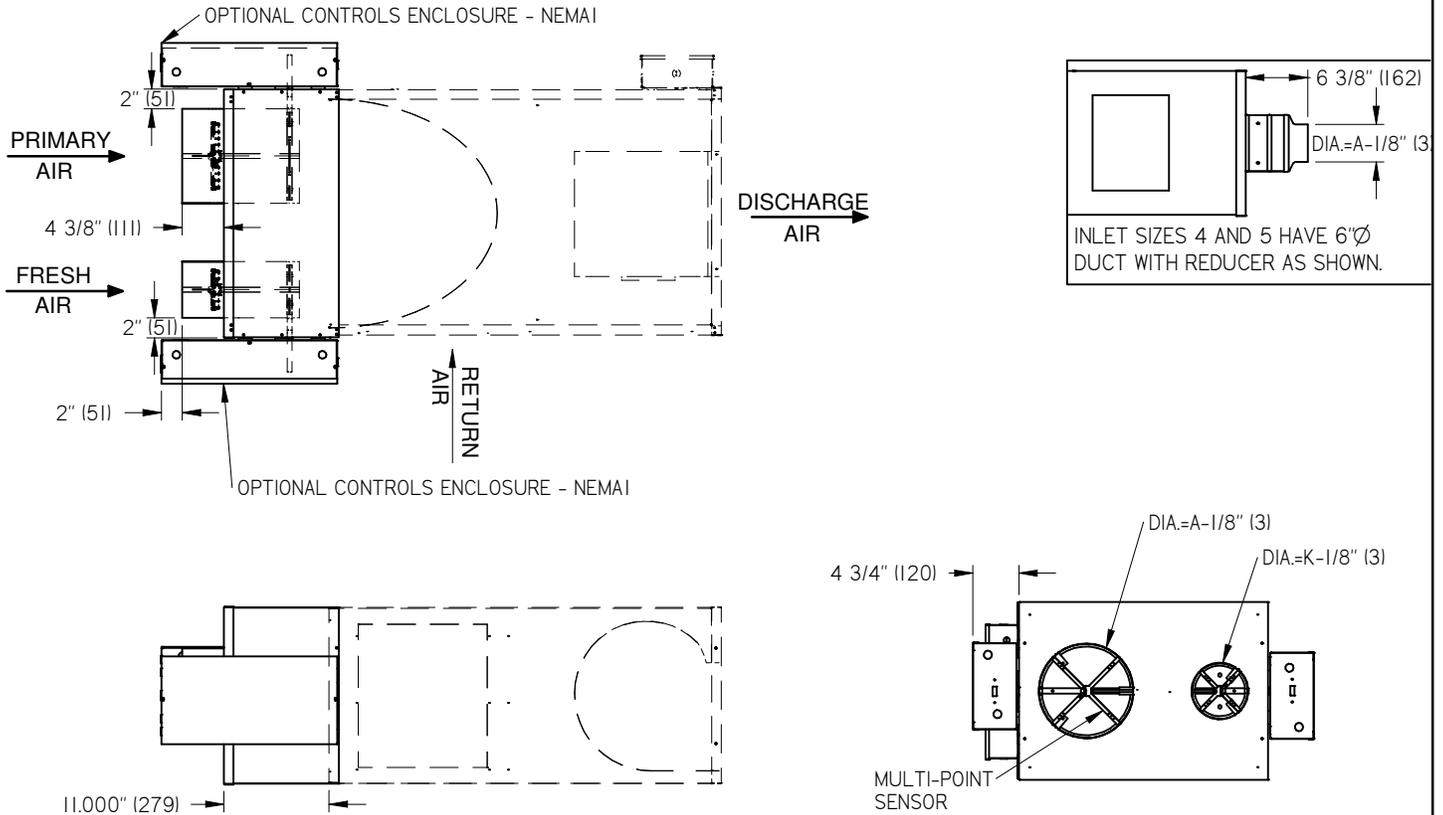

IMPERIAL UNITS (INCHES)			
Unit Size	Inlet Sizes	A	FAI Sizes K
10	6, 8		4, 5, 6
20	6, 8, 10		4, 5, 6
30	8, 10, 12		6, 8
40	10, 12, 14		6, 8
50	12, 14		6, 8


SI UNITS (mm)			
Unit Size	Inlet Sizes	A	FAI Sizes K
10	152, 203		102,127,152
20	152, 203, 254		102,127,152
30	203, 254, 305		152, 203
40	254, 305, 356		152, 203
50	305, 356		152, 203

NOTES:


- FRESH AIR INLET LINER MATCHES THE UNIT LINER
- OVERALL LENGTH OF UNIT IS INCREASED BY 11.000" (279) WITH THE FRESH AIR INLET OPTION

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.


PROJECT:		
ENGINEER:		
CUSTOMER:		
SUBMITTAL DATE:		269644
SPEC. SYMBOL:		09/26/2019
		FDC FAN POWERED TERMINALS CONSTANT VOLUME FRESH AIR INLET SIZES 10-50

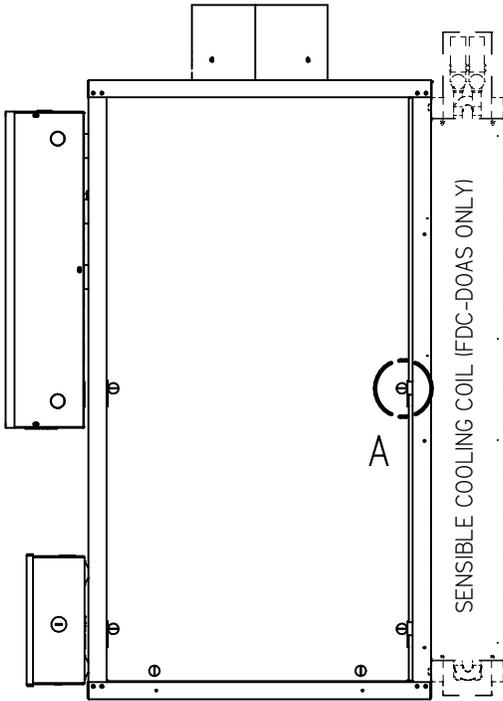


SIZE 10-50

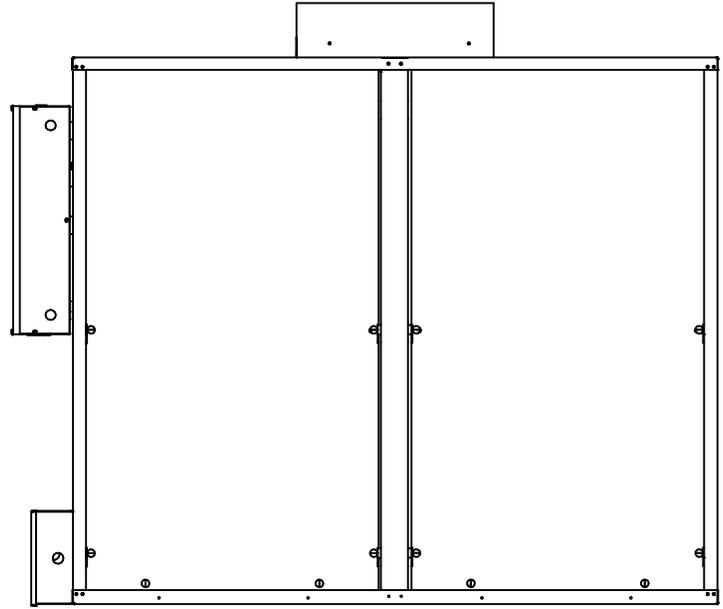

SIZE 60

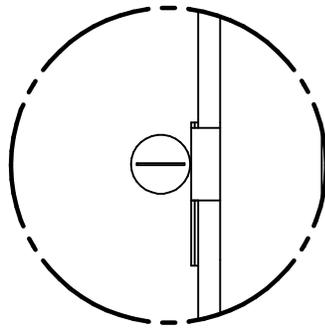

DETAIL A

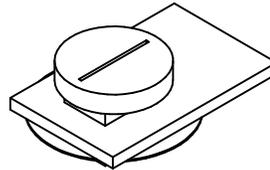


NOTES:

- PLASTIC INJECTION MOLDED BUTTON, WITH GALVANIZED STEEL TABS.
- 6 LATCHES PER ACCESS PANEL.
- SLOT INCLUDED IN CAM LATCH FOR EASY ACCESSIBILITY WITH A SCREWDRIVER.


ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE
ENGINEER:		
CUSTOMER:		G 269078
SUBMITTAL DATE:		09/26/2019
SPEC. SYMBOL:		CAM LATCHES FAN POWERED TERMINAL FDC / FDC-DOAS SIZES 10-60

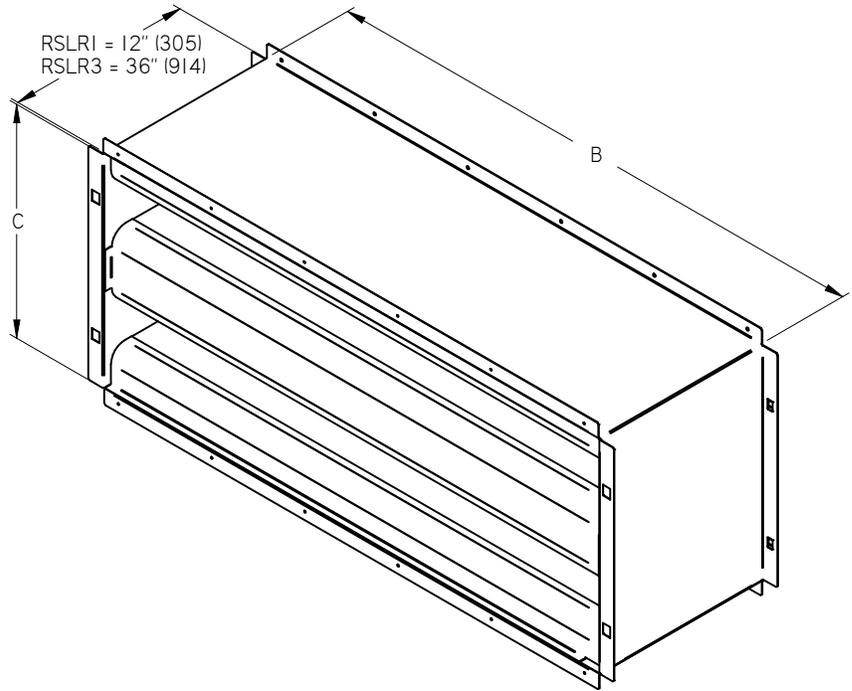

UNIT SIZE	IMPERIAL UNITS (inches)	
	B	C
10	31 5/8	12 1/2
20	36 5/8	15
30	36 5/8	15
40	36 5/8	15
50	39 5/8	17 1/2

UNIT SIZE	SI UNITS (mm)	
	B	C
10	803	318
20	930	381
30	930	381
40	930	381
50	1006	445

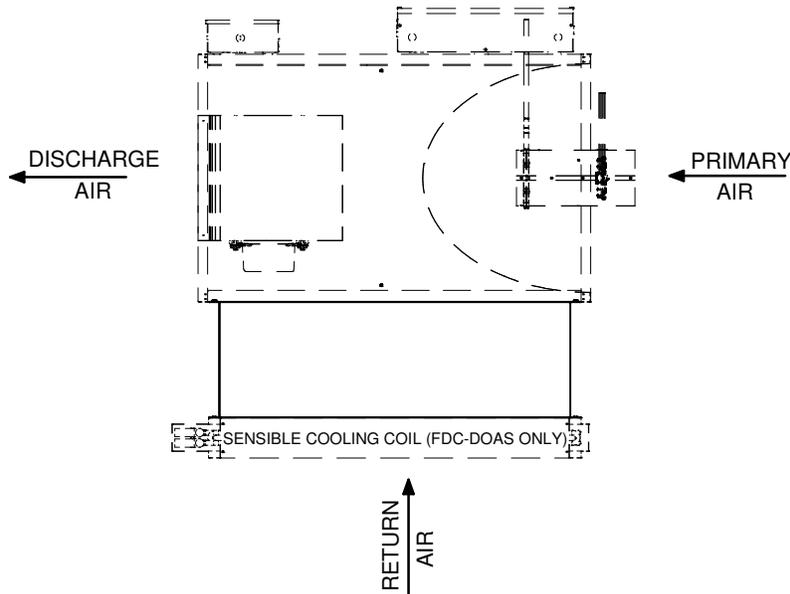

NOTES:

- 22 GA. GALVANIZED STEEL HOUSING, MECHANICALLY SEALED LEAK RESISTANT CONSTRUCTION.
- SILENCER WITH PERFORATED LINER OVER ACOUSTIC FIBERGLASS MEDIA.

OPTIONAL LINERS:

- PL - POLYMER LINER

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE	ATTENUATOR FAN POWERED TERMINALS RETURN SILENCER FDC DOAS SIZES 10-50
ENGINEER:			
CUSTOMER:		271535	
SUBMITTAL DATE:	SPEC. SYMBOL:	01/12/2021	
© Copyright PRICE INDUSTRIES 2021		SHEET 1 OF 1	

Solid Edge