

TERMINALS AVAILABLE

SPV / SDV / SEV / SMV
DAS (DISCHARGE ATTENUATOR)
MOA (MULTI. OUTLET ATTENUATOR)

NOTES:



- INSULATION EDGES ARE SEALED WITH METAL CAPS OR CORNER ANGLES.
- DISCHARGE OPENING FITTED WITH METAL END CAP WHICH IS FLUSH WITH HOUSING END.
- RECTANGULAR DISCHARGE OPENING WITH S-CLEAT AND DRIVE CLEAT DUCT CONNECTION.

OPTIONS:

- CRAF INTERNAL INSULATION – FIBERGLASS 5/8" (16mm) THICK, MIN. 4# DENSITY WITH FOIL FACE WHICH MEETS THE REQUIREMENTS OF NFPA 90A AND UL181 AND ASTM C-665.
- CRAF1 INTERNAL INSULATION – FIBERGLASS 1" (25mm) THICK, MIN. 4# DENSITY WITH FOIL FACE WHICH MEETS THE REQUIREMENTS OF NFPA 90A AND UL181 AND ASTM C-665.
- CRWF INTERNAL INSULATION – FIBERGLASS 3/4" (19mm) THICK, MIN. 1.5# DENSITY WRAPPED WITH WOVEN FABRIC WHICH MEETS THE REQUIREMENTS OF NFPA 90A AND UL181 AND ASTM C-665.
NOTE: not available with integral electric reheat.

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE [®]	
ENGINEER:		BG	SINGLE DUCT TERMINAL UNITS CLEANROOM CONSTRUCTION CRAF/CRWF
CUSTOMER:		231680	
SUBMITTAL DATE:	SPEC. SYMBOL:	NOV 08	

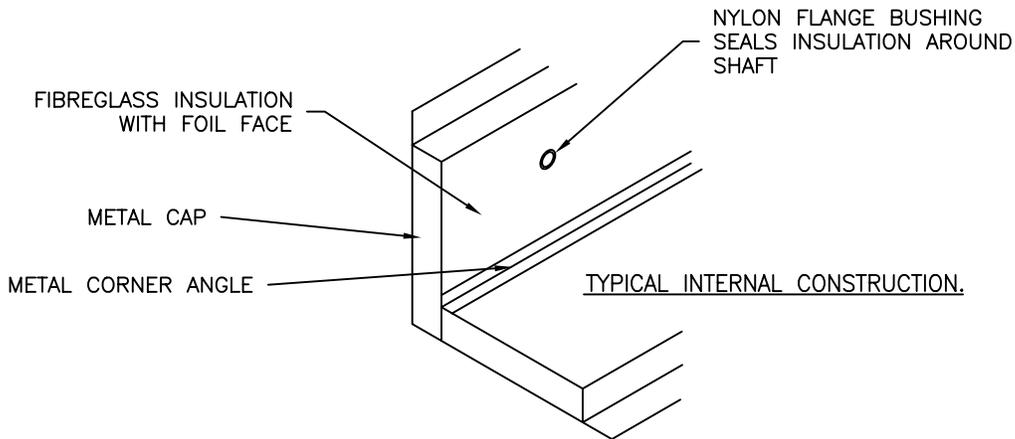
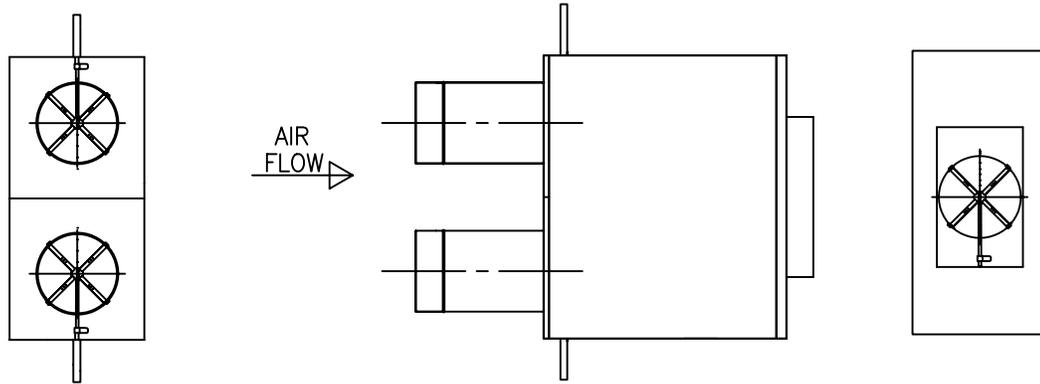


NOTES:

- INTERNAL INSULATION – RIGID BOARD FIBERGLASS 5/8" (16mm) THICK, MIN. 4# DENSITY WITH FOIL FACE WHICH MEETS THE REQUIREMENTS OF NFPA 90A AND UL 181 AND ASTM C-665.
- INSULATION EDGES ARE SEALED WITH CORNER ANGLES.
- DISCHARGE OPENING FITTED WITH METAL END CAP SEALED IN PLACE.

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE®	
ENGINEER:		BG	DUAL DUCT TERMINAL UNITS DPS/DDS/DES CLEANROOM CONSTRUCTION CRAF
CUSTOMER:			
SUBMITTAL DATE:	SPEC. SYMBOL:	JUL 2005	

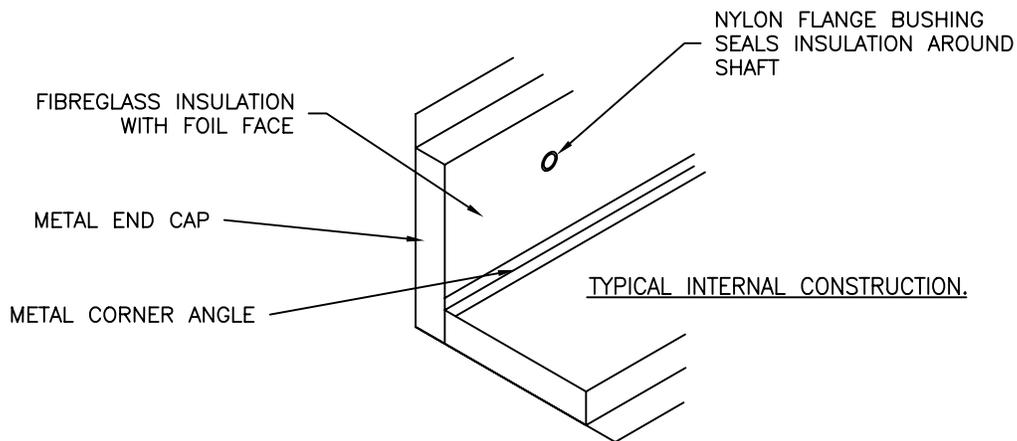
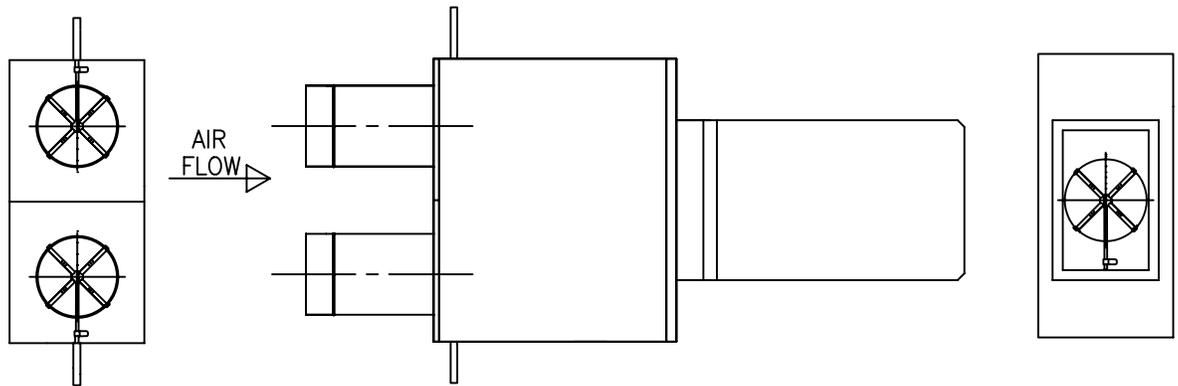


NOTES:

- INTERNAL INSULATION – FIBERGLASS 5/8" (16mm) THICK, MIN. 4# DENSITY WITH FOIL FACE WHICH MEETS THE REQUIREMENTS OF NFPA 90a AND UL 181 AND ASTM C-665.
- INSULATION EDGES ARE SEALED WITH METAL CAPS OR CORNER ANGLES.
- DISCHARGE OPENING FITTED WITH METAL END CAP.
- RECTANGULAR DISCHARGE OPENING WITH S-CLEAT AND DRIVE CLEAT DUCT CONNECTION.

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE[®]	
ENGINEER:		BG	DUAL DUCT TERMINAL UNITS DPQ/DDQ/DEQ CLEANROOM CONSTRUCTION CRAF
CUSTOMER:		231682	
SUBMITTAL DATE:	SPEC. SYMBOL:	JUL 2005	

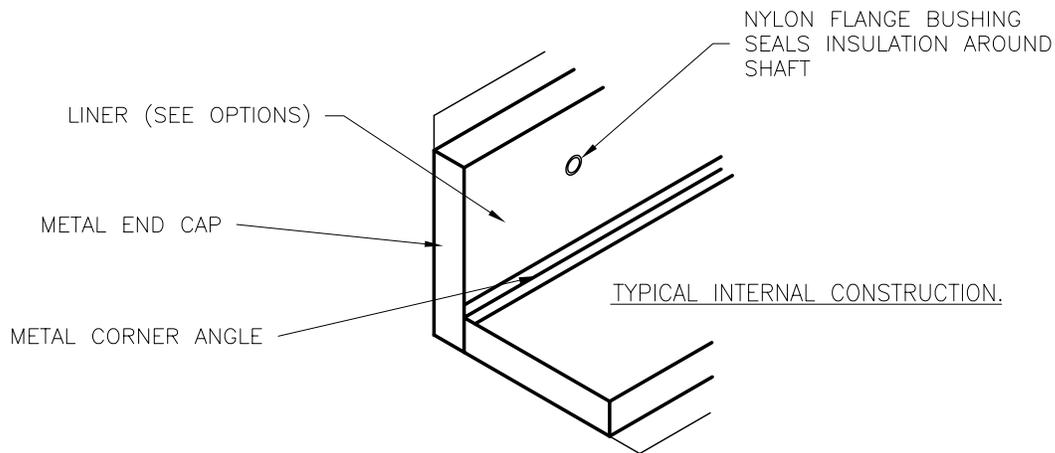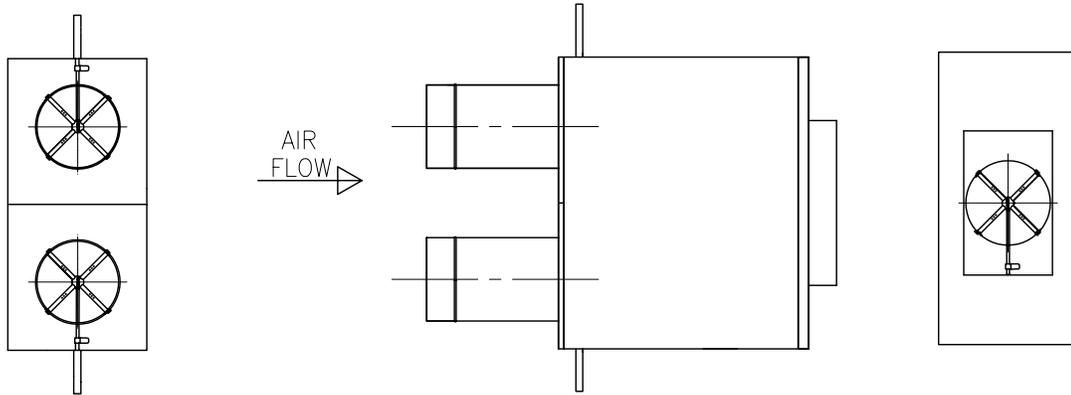

NOTES:



- INSULATION EDGES ARE SEALED WITH METAL CAPS OR CORNER ANGLES.

OPTIONS:

- CRAF INTERNAL INSULATION – FIBERGLASS 5/8" (16mm) THICK, MIN. 4# DENSITY WITH FOIL FACE WHICH MEETS THE REQUIREMENTS OF NFPA 90A AND UL181 AND ASTM C-665.
- CRWF INTERNAL INSULATION – FIBERGLASS 3/4" (19mm) THICK, MIN. 1.5# DENSITY WRAPPED WITH WOVEN FABRIC WHICH MEETS THE REQUIREMENTS OF NFPA 90A AND UL181 AND ASTM C-665.

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE [®]	
ENGINEER:		BG	DUAL DUCT TERMINAL UNITS DPS/DDS/DES CLEANROOM CONSTRUCTION CRWF/CRAF
CUSTOMER:		242317	
SUBMITTAL DATE:	SPEC. SYMBOL:	JAN 2007	

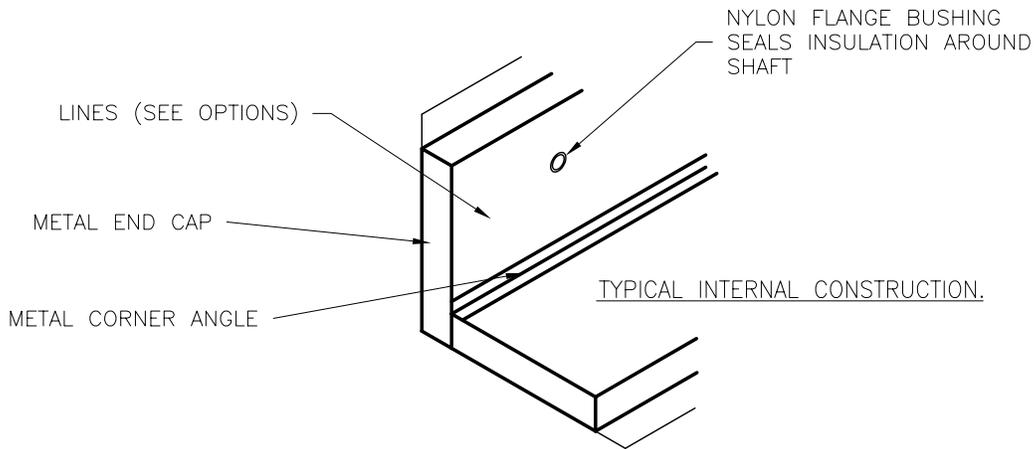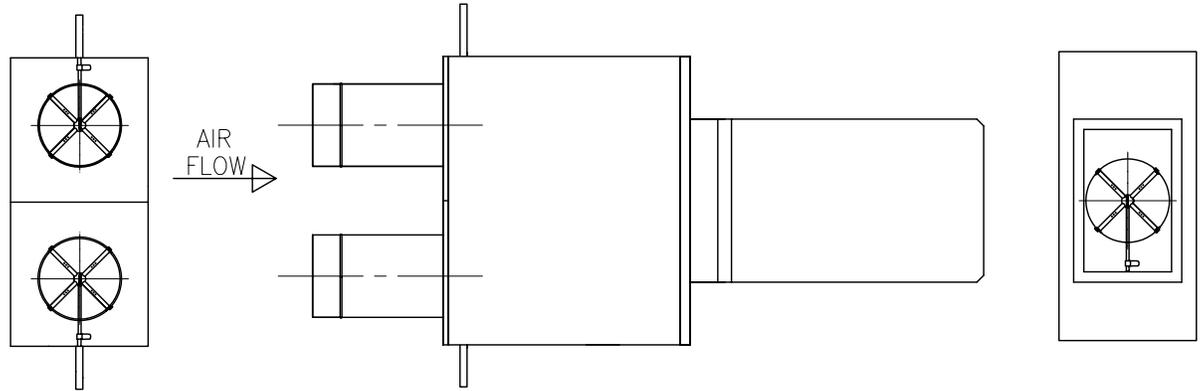

NOTES:

- INSULATION EDGES ARE SEALED WITH METAL CAPS OR CORNER ANGLES.

OPTIONS:

- CRAF INTERNAL INSULATION – FIBERGLASS $\frac{5}{8}$ " (16mm) THICK, MIN. 4# DENSITY WITH FOIL FACE WHICH MEETS THE REQUIREMENTS OF NFPA 90A AND UL181 AND ASTM C-665.
- CRWF INTERNAL INSULATION – FIBERGLASS $\frac{3}{4}$ " (19mm) THICK, MIN. 1.5# DENSITY WRAPPED WITH WOVEN FABRIC WHICH MEETS THE REQUIREMENTS OF NFPA 90A AND UL181 AND ASTM C-665.

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE [®]	
ENGINEER:		BG	DUAL DUCT TERMINAL UNITS DPQ/DDQ/DEQ CLEANROOM CONSTRUCTION CRAF/CRWF
CUSTOMER:		242318	
SUBMITTAL DATE:	SPEC. SYMBOL:	JAN 2007	