

UNIT SIZE	INLET SIZES	WIDTH	HEIGHT	CENTER-TO-CENTER
	D	W	H	A
4	3 7/8 (98)	24 1/8 (613)	8 (203)	12 1/8 (308)
5	4 7/8 (124)			
6	5 7/8 (149)		10 (254)	
7	6 7/8 (175)			
8	7 7/8 (200)	28 1/8 (714)	12 1/2 (318)	14 1/8 (359)
9	8 7/8 (225)			
10	9 7/8 (251)	32 1/8 (816)	15 (381)	16 1/8 (410)
12	11 7/8 (302)			
14	13 7/8 (352)	40 1/8 (1019)	17 1/2 (445)	20 1/8 (511)
16	15 7/8 (403)		18 (457)	

**STANDARD CONSTRUCTION:**

- 1" (25mm) THICK INTERNAL FIBERGLASS INSULATION WHICH MEETS REQUIREMENTS OF NFPA 90A AND UL181.
- 22 GAUGE GALVANIZED STEEL HOUSING. MECHANICALLY SEALED, LEAK RESISTANT CONSTRUCTION.
- RECTANGULAR DISCHARGE OPENING WITH SLIP AND DRIVE CLEAT DUCT CONNECTION.
- MULTI-POINT, CENTER AVERAGING AIRFLOW SENSOR.
- 1/2" (13mm) GALVANIZED DAMPER SHAFT WITH POSITION INDICATOR.

**CONTROLS OPTIONS:**


- FIELD MOUNTED CONTROLS, SUPPLIED BY OTHERS (FLD)
- FACTORY MOUNTED DIGITAL CONTROLS, SUPPLIED BY OTHERS (FAC)
- FACTORY MOUNTED DIGITAL CONTROLS, SUPPLIED BY PRICE (EHPD)
- FACTORY MOUNTED PNEUMATIC CONTROLS, SUPPLIED BY PRICE (EHPP)

**UNIT OPTIONS:**

- NEMA1 CONTROLS ENCLOSURE (PS)
- DISCONNECT SWITCH (DSW)
- HANGER BRACKETS (HB)
- BOTTOM REMOVABLE SENSOR (RS)
- BRASS AIRFLOW SENSOR GAUGE TAPS (GT)

**LINER OPTIONS:**

- FIBER FREE FOAM 1" (25mm) (FF1)
- SOLID METAL WITH FG1 (SM1)
- CLEANROOM ANGLES WITH FB1 (CRAF1)
- PERFORATED METAL WITH FB1 (AFPM1)
- CLEANROOM ANGLES (CA) WITH FG1 OR FF1

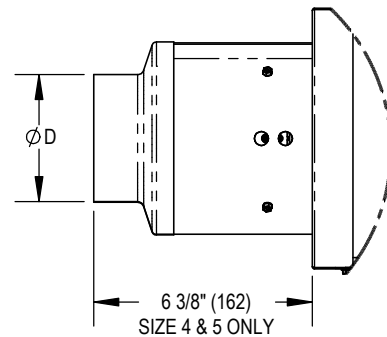

ALL METRIC DIMENSIONS [ ] ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

<b>PROJECT:</b>		<b>price</b> <sup>®</sup>	
<b>ENGINEER:</b>		APPROVED BY: GH	<b>DDV DUAL DUCT TERMINAL VARIABLE VOLUME NON-MIXING</b>
<b>CUSTOMER:</b>		DRAWING NO: 276716	
<b>SUBMITTAL DATE:</b>		DATE DRAWN: 2024-02-13	
<b>SPEC. SYMBOL:</b>			