

Ceiling Damper, Butterfly Style

Model

Round, butterfly-type (non-asbestos)

CD-RD

Same as above with adjustable volume controller.

CD-RD-A

Standard Construction:

Frame: 24 ga. galv. steel.

Blades: 22 ga. galv. steel.

Thermal Blanket: Non-asbestos, ceramic blanket.

Spring: Corrosion resistant steel spring.

Fusible Link: Replaceable 212°F standard. Others available.

Finish: Mill.

Sizes: 5" minimum (127 mm)

18" maximum (457 mm).

(For sizes 19" (483 mm) and


20" (508 mm) CFSR-2

will be supplied).

UL/ULC Listing: 3-4 hours.

Manufacturer's Recommendations


All moving parts of the damper must be inspected and cycled at intervals not greater than every 2 years in accordance with the latest edition of NFPA 90A, 92A, local and national codes. In addition, the fuse link shall be removed and inspected for corrosion. Dry lubricants are recommended.

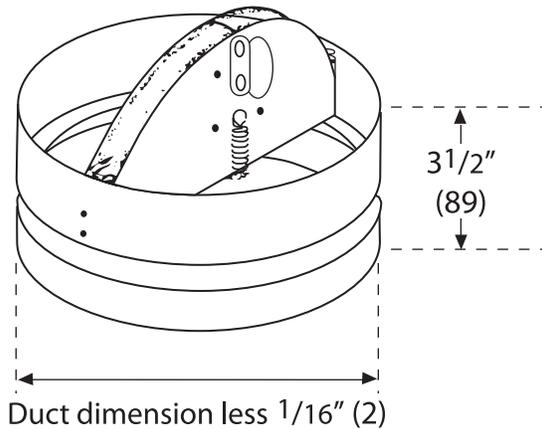

LISTED AND LABELLED BY :



DESIGNED AND TESTED IN ACCORDANCE WITH UL-555C AND ULC-S 112.2. MEETS ALL NFPA-90A REQUIREMENTS FOR FIRE DAMPERS.

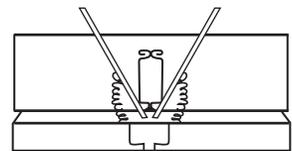

CD-RD-A
with Adjustable Volume Controller

| | | | |
|------------------------|----------------------|--|----------|
| PROJECT: | | | |
| ENGINEER: | | | |
| CUSTOMER: | | | Jul / 06 |
| SUBMITTAL DATE: | SPEC. SYMBOL: | | 245031 |

All Metric dimensions () are soft conversion. Imperial dimensions are converted to metric and rounded to the nearest millimetre.