

Thermal Blankets

Model

Thickness:

1/8" (3 mm)

1 1/4" (32 mm)

CK-2000-1


CK-2000-1-B

Features:

- Listed and labelled by UL/ULC for openings up to 576 sq. in., (14,630 sq. mm) rated 4 hrs. or less.
- Lightweight, non-asbestos fabric can be easily installed in the field.
- Allows for ceiling openings larger than duct size. (e.g. lay-in diffusers)
- Tested up to 2000°F at 4 hours.

Manufacturer's Recommendations


All moving parts of the damper must be inspected and cycled at intervals not greater than every 2 years in accordance with the latest edition of NFPA 90A, 92A, local and national codes. In addition, the fuse link shall be removed and inspected for corrosion. Dry lubricants are recommended.

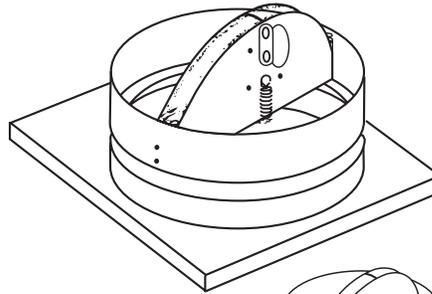

LISTED AND LABELLED BY:



DESIGNED AND TESTED IN ACCORDANCE WITH UL-555 AND ULC-S112. MEETS ALL NFPA-90A REQUIREMENTS FOR FIRE DAMPERS.

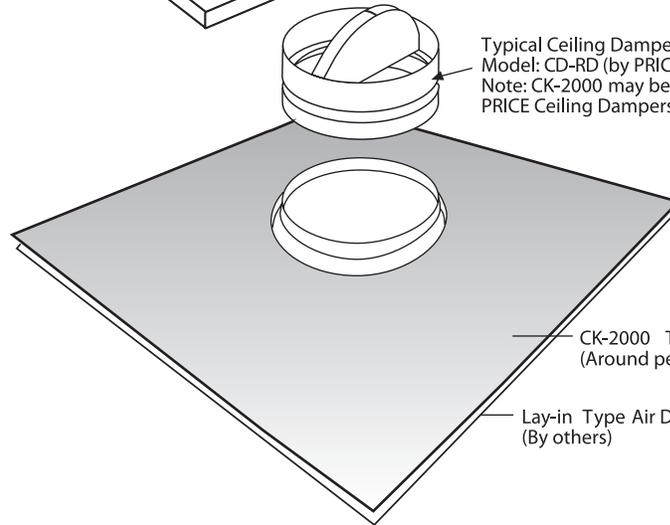

Typical Ceiling Damper
Model: CD-RD (by PRICE)
Note: CK-2000 may be used with other PRICE Ceiling Dampers.

CK-2000 Thermal Blanket (shown)
(Around perimeter of diffuser)

Lay-in Type Air Diffuser
(By others)

PROJECT:			
ENGINEER:			
CUSTOMER:		Jul / 06	
SUBMITTAL DATE:	SPEC. SYMBOL:	245037	