


# DE439

4" DEEP, 39° FIXED BLADE EXTRUDED DRAINABLE LOUVER




# DE439


## 4" Deep, 39° Fixed Blade Extruded Drainable Louver

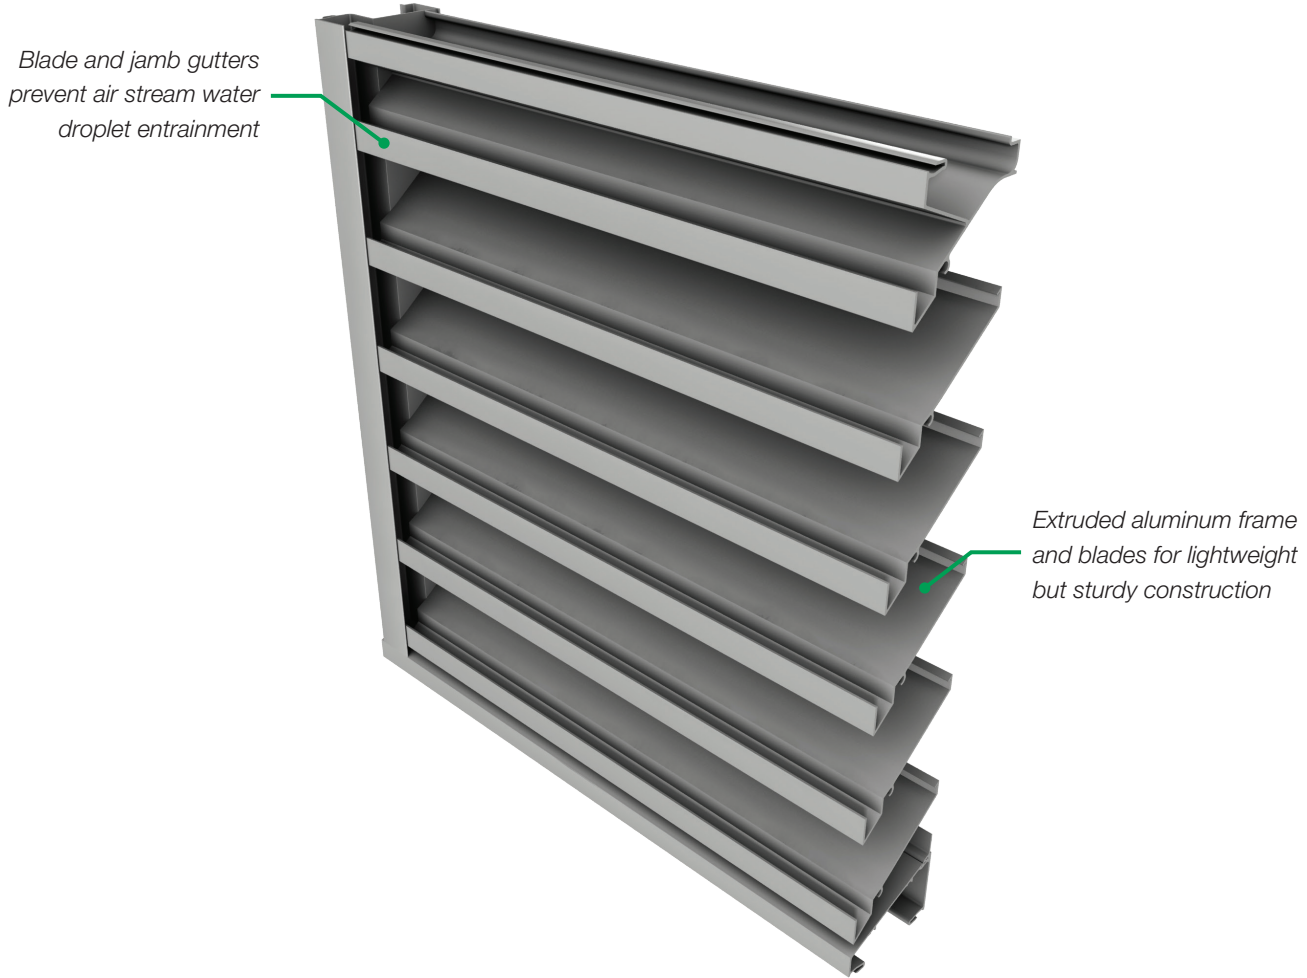

**DE439 4" Deep, 39° Fixed Blade Extruded Drainable Louver**

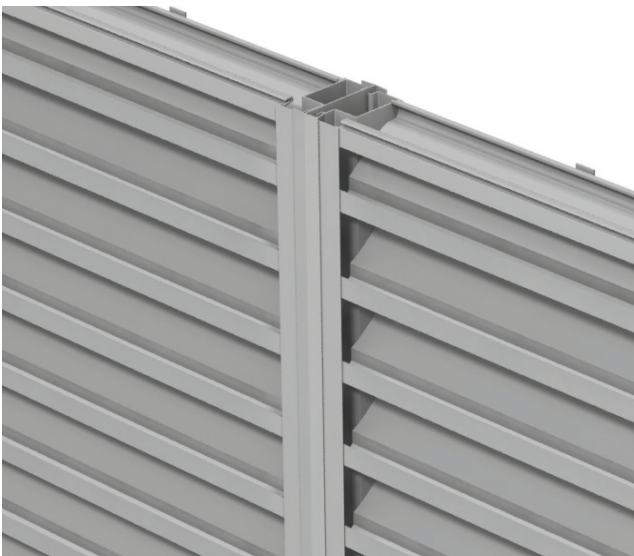

*Standard Blade*

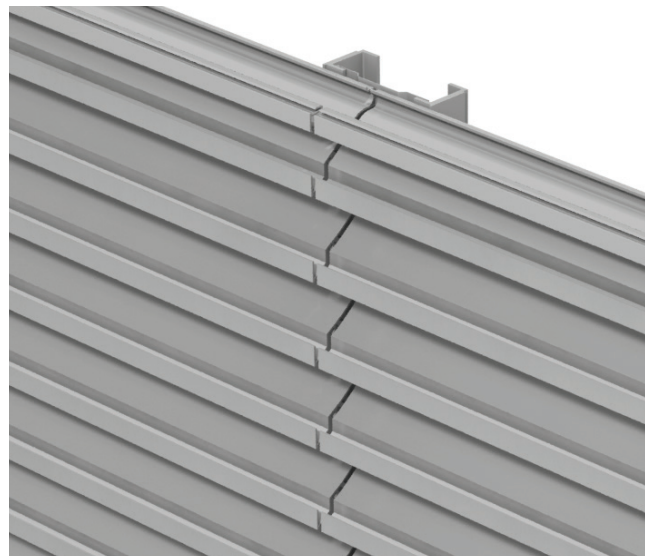

*Continuous Blade*

# DE439

## 4" Deep, 39° Fixed Blade Extruded Drainable Louver

---

### OPTIONS

- + **Sills:** Extended sill (loose) 14 gauge aluminum
- + **Mullions:** Visible extruded aluminum "1" mullions are used for standard louvers; concealed supports and closure plates are used for continuous blade louvers
- + **Blank-offs/Insulation:** Aluminum blank-offs available with or without insulation – insulation available in 1" – 4" (25 mm – 102 mm) thickness
- + **Mounting/Flanges:** Perimeter flanges, mounting angles, masonry straps or glazing adapters. Standard flanges are 1.5" (38 mm); other sizes from 0.5" (13 mm) to 4" (102 mm) are available.
- + **Screens:** 0.5" x 0.5" (12 mm x 12 mm) 16 gauge expanded aluminum bird screen with or without frame; insect screens also available
- + **Finishes:** Baked Enamel, High Performance Fluoropolymer (70% PVDF with optional clear coat), Prime Coat, Clear Anodized, Colour Anodized or Custom Finish. Standard colour options are available to select from the Louvers Finishes Guide. Custom paint colour matching is also available upon request.

### TYPICAL APPLICATION

Price DE439 fixed blade drainable louvers feature alloy 6063-T5 extruded 4" aluminum blades positioned at a 39° angle, optimizing air performance and water penetration ratings with vertical and horizontal gutter systems that capture droplets and prevent entrainment in the air stream.

### FEATURES

- + Drainable blade with vertical jamb gutter
- + All welded construction
- + 0.081" (2 mm) extruded aluminum blades and frames
- + Nominal 55.1% free area, based on 48" x 48" (1219 mm x 1219 mm) louver
- + Integral perimeter caulking stop



Product Improvement is a continuing endeavour at Price. Therefore, specifications are subject to change without notice. Consult your Price Sales Representative for current specifications or more detailed information. Not all products may be available in all geographic areas. All goods described in this document are warranted as described in the Limited Warranty shown at [priceindustries.com](http://priceindustries.com). The complete Price product catalog can be viewed online at [priceindustries.com](http://priceindustries.com).