

500/600/700

LOUVERED GRILLE



500/600/700

Louvered Grille

The 500/600/700 Series Louvered Grille makes use of adjustable (supply) or fixed (return) blades to control airflow and provide a supply or return unit with minimal see-through.

*Steel, stainless steel or
aluminum construction*

*Highly customizable with many
construction options and accessories*

*Blades parallel to long
or short dimension*

*Optional hospital grade construction features
1/4 turn quick release fasteners (700 only)*

QUALITY CONSTRUCTION

- + Louvered grilles feature precise and high quality roll-formed construction.
- + Both supply and return grilles feature steel border construction with reinforced, precision mitered corners.

MULTIPLE CONFIGURATIONS

- + Available with a variety of construction options, the 500/600/700 Series can be customized to suit each application. Options include:
 - Blade spacing (return only)
 - Deflection
 - Blade orientation
 - Mounting type
 - Frame style
 - Fastening method
 - Finish



TYPICAL APPLICATIONS

Most commonly used in sidewall applications, 500/600/700 Series is available with both supply and return construction options. With a variety of different frame styles, the louvered grilles can easily be integrated into most ceiling and surface mount applications.

CONSTRUCTION

- + Material
 - Steel (500)
 - Aluminum (600)
 - Stainless steel (700)
- + Models
 - Supply (x10/x20)
 - Return (x30/x35/x10Z)
- + Blade spacing
 - 1/2 in. (x35)
 - 3/4 in. (x10/x20/x30/x10Z)
- + Blade Deflection
 - 0° (x10Z)
 - 45° (x30/x35)
- + Size
 - Minimum: 6 in. x 4 in.
 - Maximum (single piece): 48 in. x 48 in.
 - Oversized construction available with mullions and/or duct channels
- + Options
 - Fire rated (xxxFR)
 - Filter frame (xxxFF)
 - Filter frame, fire rated (xxxFFFR)
 - Insect screen (IS)
 - Light shield (LS)
 - Square to round adaptor (SR)
 - Return air silencer (RAS)

SUPPLY APPLICATION


- + Louvered supply grilles feature individually adjustable, roll-formed blades and are available as either single or double deflection, with an optional damper. Blade orientation options allow the 500/600/700 Series to be used in a range of applications.
 - Horizontally mounted blades can be used to control the rise or drop of the airstream, typically used to minimize downdrafts or to blow warm air down in a high sidewall application.
 - Vertically mounted blades control the spread of the air pattern, and are used primarily in applications where throw, rather than drop, is the prime concern.

Single Deflection


- + Single deflection grilles are an economical option that contain a single set of adjustable blades to control the air pattern in one direction.

Double Deflection

- + Double deflection grilles offer the most flexibility, with two sets of adjustable blades oriented perpendicular to each other, allowing for air pattern control in both the horizontal and vertical plane.

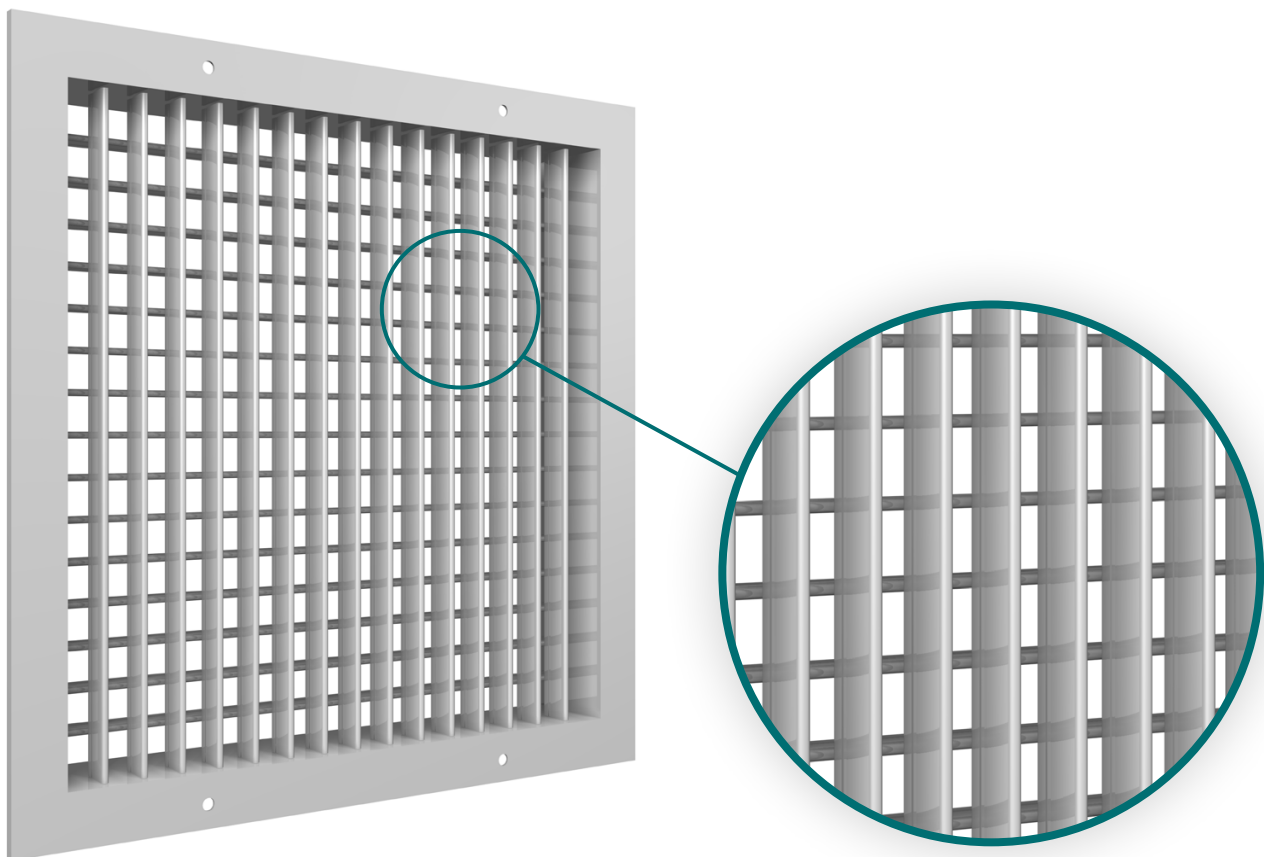

Adjustable double deflection supply grille

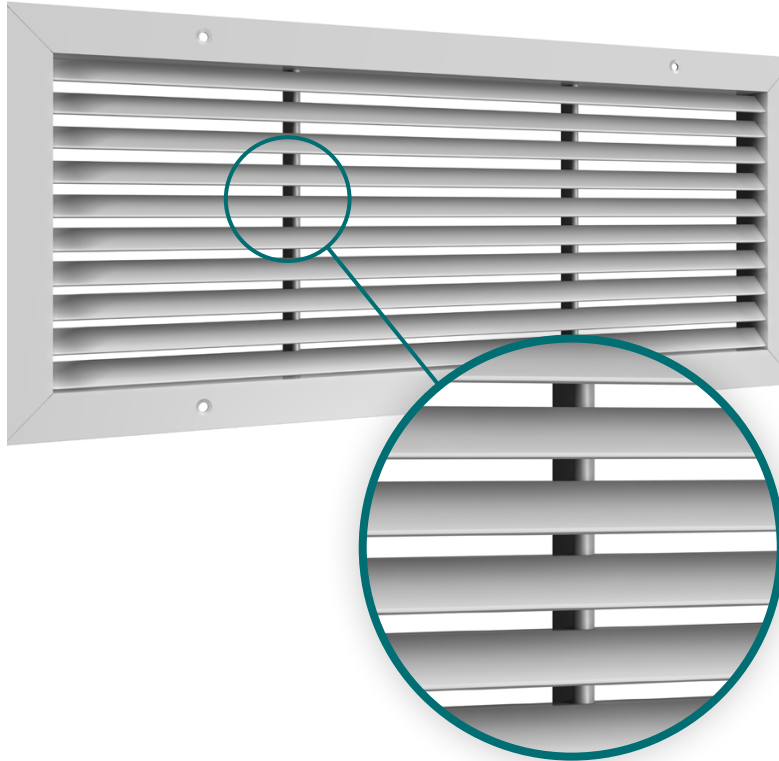

Fixed 45° deflection return grille

RETURN APPLICATION

The 500/600/700 Series louvered return grilles match and complement the louvered supply grilles. Return grilles are available with a 0° fixed blade deflection or a 45° fixed blade deflection for minimal see-through. Two fixed blade spacing options, 1/2 in. and 3/4 in., are available to suit performance and architectural considerations.

HOSPITAL GRADE


Well suited to cleanrooms, laboratories and hospital applications that require frequent cleaning with strong cleaning solutions, the hospital grade option features a removable core with stainless steel quick-release fasteners for easy access and cleaning (700 series only).




Hospital-grade 700 Series with quick-release fasteners

FILTER FRAME

- + The filter frame option is intended to be incorporated into a conveniently serviceable return air filtration system and is designed for recirculating air systems.
- + Filter frames can be ordered to accept standard 1 in. or 2 in. filter media.
- + A removable hinge mechanism allows for a hinged frame for quick access to the filter, or complete removal of the grille for cleaning or access to the duct.
- + 1/4 turn quick release latches or knurled screw latch options are available.
- + Also available with latches on both sides (hingeless).

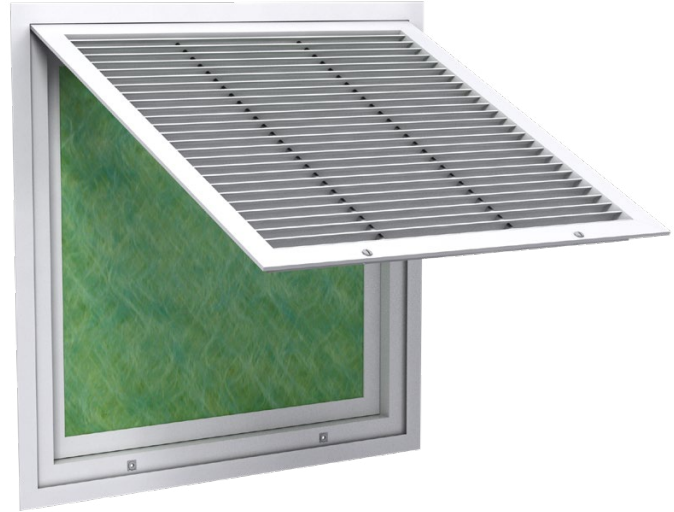

Optional filter frame

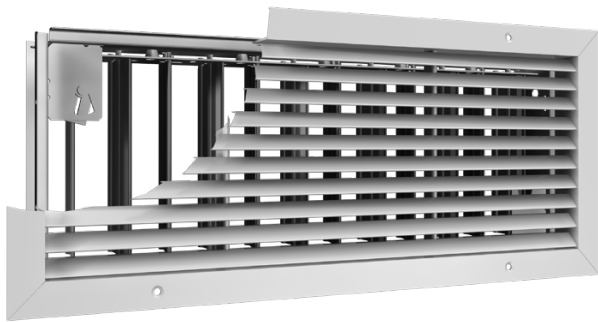

Optional damper



Optional RAS

ACCESSORIES

A complete line of accessories is available to help customize the 500/600/700 Series to meet specific project requirements:

- + Return Air Silencers (RAS) are designed to provide sound attenuation by reducing return air noise while still providing minimal pressure drop. The RAS is particularly useful for return air systems featuring ceiling or wall open-plenum returns.
- + Insect screens prevent insects from entering the occupied space through the grille.
- + Square-to-round adaptors allow for a wider range of connection options, permitting direct connection to round ducts.
- + Opposed blade dampers are available in stainless steel construction and are supplied attached to the back of the grille for airflow adjustment.

PERFORMANCE DATA

510 / 520 / 610 / 620 / 710 / 720 - Supply

Size	Core Velocity (fpm) Velocity Pressure (in. w.g.)	NC 20		NC 30		NC 40	
		300	400	500	600	700	800
		0.006	0.010	0.016	0.022	0.030	0.040
Ac = 0.15 ft ² 7 x 4 6 x 5	Total Pressure	0.014	0.024	0.038	0.052	0.071	0.094
	22.5°	0.017	0.028	0.045	0.063	0.085	0.114
	45°	0.025	0.042	0.067	0.093	0.126	0.168
	(in. w.g.)	0.025	0.042	0.067	0.093	0.126	0.168
Ac = 0.18 ft ² 8 x 4 7 x 5 6 x 6	Flow Rate (cfm)	45	60	75	90	105	120
	Sound (NC)	-	-	-	-	15	19
	0°	4-6-12	5-8-14	7-10-16	8-12-17	9-13-19	11-14-20
	22.5°	3-5-10	4-6-11	6-8-13	6-10-14	7-10-15	9-11-16
Ac = 0.22 ft ² 10 x 4 8 x 5 7 x 6	Flow Rate (cfm)	55	70	90	110	125	145
	Sound (NC)	-	-	-	-	16	20
	0°	4-7-13	6-8-15	7-11-17	9-13-19	10-15-20	11-16-22
	22.5°	3-6-10	5-6-12	6-9-14	7-10-15	8-12-16	9-13-18
Ac = 0.26 ft ² 12 x 4 10 x 5 8 x 6	Flow Rate (cfm)	65	90	110	130	155	175
	Sound (NC)	-	-	-	-	17	21
	0°	4-7-14	7-10-17	8-12-19	9-15-21	11-16-23	13-17-24
	22.5°	3-6-11	6-8-14	6-10-15	7-12-17	9-13-18	10-14-19
Ac = 0.30 ft ² 14 x 4	Flow Rate (cfm)	80	105	130	155	180	210
	Sound (NC)	-	-	-	-	17	21
	0°	5-8-16	7-11-19	9-13-21	10-16-23	12-17-24	14-19-26
	22.5°	4-6-13	6-9-15	7-10-17	8-13-18	10-14-19	11-15-21
Ac = 0.34 ft ² 16 x 4 12 x 5 10 x 6	Flow Rate (cfm)	90	120	150	180	210	240
	Sound (NC)	-	-	-	-	18	22
	0°	5-9-17	8-11-20	9-14-22	11-17-24	13-19-26	15-20-28
	22.5°	4-7-14	6-9-16	7-11-18	9-14-19	10-15-21	12-16-22
Ac = 0.39 ft ² 18 x 4 14 x 5 12 x 6 8 x 8	Flow Rate (cfm)	100	135	170	205	240	270
	Sound (NC)	-	-	-	-	19	23
	0°	5-9-18	8-12-21	10-15-24	12-19-26	14-20-28	16-22-30
	22.5°	4-7-14	6-10-17	8-12-19	10-15-21	11-16-22	13-18-24
Ac = 0.45 ft ² 20 x 4 16 x 5 12 x 6 8 x 8	Flow Rate (cfm)	115	155	195	235	275	310
	Sound (NC)	-	-	-	-	19	23
	0°	6-9-19	9-13-23	11-16-25	13-19-28	15-22-30	17-23-32
	22.5°	5-7-15	7-10-18	9-13-20	10-15-22	12-18-24	14-18-26
Ac = 0.51 ft ² 22 x 4 18 x 5 14 x 6 8 x 8	Flow Rate (cfm)	120	160	200	240	280	320
	Sound (NC)	-	-	-	-	20	24
	0°	6-9-20	9-13-24	11-16-26	13-19-29	15-22-31	17-23-33
	22.5°	5-7-16	7-10-19	9-13-21	10-15-23	12-18-25	14-18-27
Ac = 0.57 ft ² 24 x 4 20 x 5 16 x 6 8 x 8	Flow Rate (cfm)	130	175	220	265	310	355
	Sound (NC)	-	-	-	-	21	25
	0°	6-9-21	9-13-25	11-16-27	13-19-30	15-22-32	17-23-34
	22.5°	5-7-17	7-10-20	9-13-22	10-15-24	12-18-26	14-18-28
Ac = 0.63 ft ² 26 x 4 22 x 5 18 x 6 8 x 8	Flow Rate (cfm)	140	190	240	290	340	390
	Sound (NC)	-	-	-	-	22	26
	0°	6-9-22	9-13-26	11-16-28	13-19-31	15-22-33	17-23-35
	22.5°	5-7-18	7-10-21	9-13-23	10-15-25	12-18-27	14-18-29
Ac = 0.69 ft ² 28 x 4 24 x 5 20 x 6 8 x 8	Flow Rate (cfm)	150	205	260	315	370	425
	Sound (NC)	-	-	-	-	23	27
	0°	6-9-23	9-13-27	11-16-29	13-19-32	15-22-34	17-23-36
	22.5°	5-7-19	7-10-22	9-13-24	10-15-26	12-18-28	14-18-30
Ac = 0.75 ft ² 30 x 4 26 x 5 22 x 6 8 x 8	Flow Rate (cfm)	160	215	270	325	380	435
	Sound (NC)	-	-	-	-	24	28
	0°	6-9-24	9-13-28	11-16-30	13-19-33	15-22-35	17-23-37
	22.5°	5-7-20	7-10-23	9-13-25	10-15-27	12-18-29	14-18-31
Ac = 0.81 ft ² 32 x 4 28 x 5 24 x 6 8 x 8	Flow Rate (cfm)	170	230	290	350	410	470
	Sound (NC)	-	-	-	-	25	29
	0°	6-9-25	9-13-29	11-16-31	13-19-34	15-22-36	17-23-38
	22.5°	5-7-21	7-10-24	9-13-26	10-15-28	12-18-30	14-18-32
Ac = 0.87 ft ² 34 x 4 30 x 5 26 x 6 8 x 8	Flow Rate (cfm)	180	245	310	375	440	505
	Sound (NC)	-	-	-	-	26	30
	0°	6-9-26	9-13-30	11-16-32	13-19-35	15-22-37	17-23-39
	22.5°	5-7-22	7-10-25	9-13-27	10-15-29	12-18-31	14-18-33
Ac = 0.93 ft ² 36 x 4 32 x 5 28 x 6 8 x 8	Flow Rate (cfm)	190	260	330	400	470	540
	Sound (NC)	-	-	-	-	27	31
	0°	6-9-27	9-13-31	11-16-33	13-19-36	15-22-38	17-23-40
	22.5°	5-7-23	7-10-26	9-13-28	10-15-30	12-18-32	14-18-34
Ac = 0.99 ft ² 38 x 4 34 x 5 30 x 6 8 x 8	Flow Rate (cfm)	200	275	350	425	500	575
	Sound (NC)	-	-	-	-	28	32
	0°	6-9-28	9-13-32	11-16-34	13-19-37	15-22-39	17-23-41
	22.5°	5-7-24	7-10-27	9-13-29	10-15-31	12-18-33	14-18-35
Ac = 1.05 ft ² 40 x 4 36 x 5 32 x 6 8 x 8	Flow Rate (cfm)	210	295	380	460	540	620
	Sound (NC)	-	-	-	-	29	33
	0°	6-9-29	9-13-33	11-16-35	13-19-38	15-22-40	17-23-42
	22.5°	5-7-25	7-10-28	9-13-30	10-15-32	12-18-34	14-18-36
Ac = 1.11 ft ² 42 x 4 38 x 5 34 x 6 8 x 8	Flow Rate (cfm)	220	310	400	490	580	670
	Sound (NC)	-	-	-	-	30	34
	0°	6-9-30	9-13-34	11-16-36	13-19-39	15-22-41	17-23-43
	22.5°	5-7-26	7-10-29	9-13-31	10-15-33	12-18-35	14-18-37
Ac = 1.17 ft ² 44 x 4 40 x 5 36 x 6 8 x 8	Flow Rate (cfm)	230	325	420	510	600	690
	Sound (NC)	-	-	-	-	31	35
	0°	6-9-31	9-13-35	11-16-37	13-19-40	15-22-42	17-23-44
	22.5°	5-7-27	7-10-30	9-13-32	10-15-34	12-18-36	14-18-38
Ac = 1.23 ft ² 46 x 4 42 x 5 38 x 6 8 x 8	Flow Rate (cfm)	240	340	440	540	640	740
	Sound (NC)	-	-	-	-	32	36
	0°	6-9-32	9-13-36	11-16-38	13-19-41	15-22-43	17-23-45
	22.5°	5-7-28	7-10-31	9-13-33	10-15-35	12-18-37	14-18-39
Ac = 1.29 ft ² 48 x 4 44 x 5 40 x 6 8 x 8	Flow Rate (cfm)	250	355	460	560	660	760
	Sound (NC)	-	-	-	-	33	37
	0°	6-9-33	9-13-37	11-16-39	13-19-42	15-22-44	17-23-46
	22.5°	5-7-29	7-10-32	9-13-34	10-15-36	12-18-38	14-18-40
Ac = 1.35 ft ² 50 x 4 46 x 5 42 x 6 8 x 8	Flow Rate (cfm)	260	370	480	590	690	790
	Sound (NC)	-	-	-	-	34	38
	0°	6-9-34	9-13-38	11-16-40	13-19-43	15-22-45	17-23-47
	22.5°	5-7-30	7-10-33	9-13-35	10-15-37	12-18-39	14-18-41
Ac = 1.41 ft ² 52 x 4 48 x 5 44 x 6 8 x 8	Flow Rate (cfm)	270	385	500	610	710	810
	Sound (NC)	-	-	-	-	35	39
	0°	6-9-35	9-13-39	11-16-41	13-19-44	15-22-46	17-23-48
	22.5°	5-7-31	7-10-34	9-13-36	10-15-38	12-18-40	14-18-42
Ac = 1.47 ft ² 54 x 4 50 x 5 46 x 6 8 x 8	Flow Rate (cfm)	280	400	520	630	730	830
	Sound (NC)	-	-	-	-	36	40
	0°	6-9-36	9-13-40	11-16-42	13-19-45	15-22-47	17-23-49
	22.5°	5-7-32	7-10-35	9-13-37	10-15-39	12-18-41	14-18-43
Ac = 1.53 ft ² 56 x 4 52 x 5 48 x 6 8 x 8	Flow Rate (cfm)	290	415	540	650	750	850
	Sound (NC)	-	-	-	-	37	41
	0°	6-9-37	9-13-41	11-16-43	13-19-46	15-22-48	17-23-50
	22.5°	5-7-33	7-10-36	9-13-38	10-15-40	12-18-42	14-18-44
Ac = 1.59 ft ² 58 x 4 54 x 5 50 x 6 8 x 8	Flow Rate (cfm)	300	430	560	670	770	870
	Sound (NC)	-	-	-	-	38	42
	0°	6-9-38	9-13-42	11-16-44	13-19-47	15-22-49	17-23-51
	22.5°	5-7-34	7-10-37	9-13-39	10-15-41	12-18-43	14-18-45
Ac = 1.65 ft ² 60 x 4 56 x 5 52 x 6 8 x 8	Flow Rate (cfm)	310	445	580	690	790	890
	Sound (NC)	-	-	-	-	39	43
	0°	6-9-39	9-13-43	11-16-45	13-19-48	15-22-50	17-23-52
	22.5°	5-7-35	7-10-38	9-13-40	10-15-42	12-18-44	14-18-46
Ac = 1.71 ft ² 62 x 4 58 x 5 54 x 6 8 x 8	Flow Rate (cfm)	320	460	600	710	810	910
	Sound (NC)	-	-	-	-	40	44
	0°	6-9-40	9-13-44	11-16-46	13-19-49	15-22-51	17-23-53
	22.5°	5-7-36	7-10-39	9-13-41	10-15-43	12-18-45	14-18-47
Ac = 1.77 ft ² 64 x 4 60 x 5 56 x 6 8 x 8	Flow Rate (cfm)	330	475	620	730	830	930
	Sound (NC)	-	-	-	-	41	45
	0°	6-9-41	9-13-45	11-16-47	13-19-50	15-22-52	17-23-54
	22.5°	5-7-37	7-10-40	9-13-42	10-15-44	12-18-46	14-18-48
Ac = 1.83 ft ² 66 x 4 62 x 5 58 x 6 8 x 8	Flow Rate (cfm)	340	490	640	750	850	950
	Sound (NC)	-	-	-	-	42	46
	0°	6-9-42	9-13-46	11-16-48	13-19-51	15-22-53	17-23-55
	22.5°	5-7-38	7-10-41	9-13-43	10-15-45	12-18-47	14-18-49
Ac = 1.89 ft ² 68 x 4 64 x 5 60 x 6 8 x 8	Flow Rate (cfm)	350	505	660	770	870	970
	Sound (NC)	-	-	-	-	43	47
	0°	6-9-43	9-13-47	11-16-49	13-19-52	15-22-54	17-23-56
	22.5°	5-7-39	7-10-42	9-13-44	10-15-46	12-18-48	14-18-50
Ac = 1.95 ft ² 70 x 4 66 x 5 62 x 6 8 x 8	Flow Rate (cfm)	360	520	680	790	890	990

PERFORMANCE DATA

510 / 610 / 710 / 520 / 620 / 720 - Supply

Size	NC 20 NC 30 NC 40											
	Core Velocity (fpm)	300	400	500	600	700	800	1000	1200	1400	1600	1800
	Velocity Pressure (in. w.g.)	0.006	0.010	0.016	0.022	0.030	0.040	0.062	0.090	0.122	0.159	0.202
	Total Pressure (in. w.g.)	0.014	0.024	0.038	0.052	0.071	0.094	0.146	0.212	0.287	0.374	0.475
Ac = 0.46 ft ² 20 x 4 16 x 5 14 x 6 10 x 8	0°	0.017	0.028	0.045	0.063	0.085	0.114	0.176	0.256	0.347	0.452	0.574
	22.5°	0.025	0.042	0.067	0.093	0.126	0.168	0.261	0.379	0.514	0.669	0.85
	45°	0.025	0.042	0.067	0.093	0.126	0.168	0.261	0.379	0.514	0.669	0.85
	45°	0.025	0.042	0.067	0.093	0.126	0.168	0.261	0.379	0.514	0.669	0.85
Ac = 0.52 ft ² 24 x 4 18 x 5 16 x 6	Flow Rate (cfm)	140	185	230	275	320	370	460	550	645	735	830
	Sound (NC)	-	-	-	15	20	24	31	36	41	45	49
	0°	7-10-22	9-14-25	12-17-27	14-22-30	16-23-32	19-25-35	23-27-39	25-31-43	27-33-46	29-35-49	31-38-52
	22.5°	6-8-18	7-11-20	10-14-22	11-18-24	13-18-26	15-20-28	18-22-31	20-25-34	22-26-37	23-28-39	25-30-42
Ac = 0.60 ft ² 28 x 4 20 x 5 18 x 6 12 x 8 10 x 10	45°	3-5-11	5-7-12	6-9-14	7-11-15	8-11-16	10-13-17	11-14-20	12-15-21	14-17-23	14-18-24	15-19-26
	Flow Rate (cfm)	155	210	260	310	365	415	520	625	730	830	935
	Sound (NC)	-	-	-	16	20	24	31	37	41	45	49
	0°	7-11-23	10-15-26	13-19-29	15-22-32	18-25-35	20-26-37	24-30-41	27-33-45	29-35-49	31-38-52	32-40-55
Ac = 0.69 ft ² 30 x 4 24 x 5 20 x 6 14 x 8 12 x 10	22.5°	6-9-18	8-12-21	10-15-23	12-18-26	14-20-28	16-21-30	19-24-33	22-26-36	22-28-39	25-30-42	26-32-44
	45°	3-5-11	5-7-13	6-9-15	8-11-16	9-12-17	10-13-18	12-15-21	13-16-23	14-18-24	15-19-26	16-20-28
	Flow Rate (cfm)	180	240	300	360	420	480	600	720	840	960	1080
	Sound (NC)	-	-	-	16	21	25	32	37	42	46	50
Ac = 0.81 ft ² 36 x 4 28 x 5 22 x 6 16 x 8 14 x 10	0°	7-12-24	11-16-28	14-20-31	16-24-34	19-27-37	22-29-40	26-32-45	29-35-48	31-38-52	33-40-56	35-43-59
	22.5°	6-10-19	9-13-22	11-16-25	13-19-27	15-22-30	18-23-32	21-26-36	23-28-38	25-30-42	26-32-45	28-34-47
	45°	4-6-12	5-8-14	7-10-16	8-12-17	10-13-19	11-14-20	13-16-22	14-17-24	15-19-26	16-20-28	17-21-29
	Flow Rate (cfm)	205	275	345	415	485	550	690	830	965	1100	1240
Ac = 0.90 ft ² 40 x 4 30 x 5 26 x 6 18 x 8 16 x 10 12 x 12	Sound (NC)	-	-	-	17	22	26	32	38	43	47	50
	0°	8-13-26	12-17-30	15-22-34	18-26-37	21-29-40	24-31-43	28-34-47	30-38-52	33-40-56	35-43-60	37-45-63
	22.5°	6-10-21	10-14-24	12-18-27	14-21-30	17-23-32	19-25-34	22-27-38	24-30-42	26-32-45	28-34-48	30-36-50
	45°	4-6-13	6-9-15	7-11-17	9-13-18	10-14-20	12-15-21	14-17-24	15-19-26	16-20-28	18-22-30	19-23-31
Ac = 1.07 ft ² 48 x 4 36 x 5 30 x 6 22 x 8 18 x 10 14 x 12	Flow Rate (cfm)	245	325	405	485	565	650	810	970	1130	1300	1460
	Sound (NC)	-	-	-	18	22	26	33	39	43	47	51
	0°	8-14-28	13-19-33	16-23-37	19-28-40	23-31-43	26-33-46	30-37-51	33-41-56	36-44-60	38-46-64	40-49-68
	22.5°	6-11-22	10-15-26	13-18-30	15-22-32	18-25-34	21-26-37	24-30-41	26-33-45	29-35-48	30-37-51	32-39-54
Ac = 1.17 ft ² 48 x 4 36 x 5 30 x 6 22 x 8 18 x 10 14 x 12	45°	4-7-14	6-9-16	8-12-18	10-14-20	11-15-22	13-17-23	15-19-26	17-20-28	18-22-30	19-23-32	20-25-34
	Flow Rate (cfm)	270	360	450	540	630	720	900	1080	1260	1440	1620
	Sound (NC)	-	-	-	18	23	27	34	39	44	48	51
	0°	9-15-30	14-20-34	17-25-39	21-30-42	24-33-45	27-35-48	32-39-55	35-43-59	37-46-63	40-49-68	42-52-72
Ac = 1.37 ft ² 48 x 4 36 x 5 30 x 6 22 x 8 18 x 10 14 x 12	22.5°	7-12-24	11-16-27	14-20-31	17-24-34	19-26-36	22-28-38	26-31-44	28-34-47	30-37-50	32-39-54	34-42-58
	45°	5-8-15	7-10-17	9-13-19	10-15-21	12-16-23	14-17-24	16-20-27	17-21-29	19-23-32	20-24-34	21-26-36
	Flow Rate (cfm)	320	430	535	640	750	855	1070	1280	1500	1710	1930
	Sound (NC)	-	-	-	19	24	28	34	40	45	49	52
Ac = 1.57 ft ² 48 x 4 36 x 5 30 x 6 22 x 8 18 x 10 14 x 12	0°	10-16-32	15-22-38	18-28-42	22-33-46	26-36-49	29-38-53	35-43-59	38-48-64	41-50-69	43-53-74	46-57-79
	22.5°	8-13-26	12-18-30	14-22-34	18-26-37	21-29-39	23-30-42	28-34-47	30-37-51	33-40-55	34-42-59	37-46-63
	45°	5-8-16	7-11-19	9-14-21	11-17-23	13-18-25	14-19-26	17-21-29	19-23-32	20-25-35	22-27-37	23-28-40
	Flow Rate (cfm)	320	430	535	640	750	855	1070	1280	1500	1710	1930

Performance Notes:

- Tested in accordance with ASHRAE Standard 70-2023 "Method of Testing for Rating the Performance of Air Outlets and Inlets."
- Air flow is in cfm.
- All pressures are in in. w.g.
- Throw values are measured in feet for terminal velocities of 150 fpm (minimum), 100 fpm (middle) and 50 fpm (maximum).
- Throw data is based on supply air and room air being at isothermal conditions.
- NC values are based on room absorption of 10 dB re 10⁻¹² Watts @ 0° deflection and one diffuser.
- Blanks "-" indicate an NC level below 15.
- Deflection** 0°-22.5°-45°
The listed deflection settings refer to horizontal deflection. For a 20° upward deflection, use the room throw rating for a 0° setting and the total pressure for a 22.5° horizontal setting. The performance tables are based on registers with core style 520 with an opposed blade damper. The performance of other core styles, with or without dampers, can be obtained by the application of correction factors to the tabulated performance data. See correction factor table at end of section.

PERFORMANCE DATA

510 / 610 / 710 / 520 / 620 / 720 - Supply

Size		NC 20				NC 30		NC 40		NC 50					
		Core Velocity (fpm)	300	400	500	600	700	800	1000	1200	1400	1600	1800		
		Velocity Pressure (in. w.g.)	0.006	0.010	0.016	0.022	0.030	0.040	0.062	0.090	0.122	0.159	0.202		
		Total Pressure (in. w.g.)	0°	0.014	0.024	0.036	0.052	0.071	0.094	0.146	0.212	0.287	0.374	0.475	
			22.5°	0.017	0.028	0.045	0.063	0.085	0.114	0.176	0.256	0.347	0.452	0.574	
45°	0.025	0.042	0.067	0.093	0.126	0.168	0.261	0.379	0.514	0.669	0.85				
	Ac = 1.18 ft² 40 x 5 34 x 6 24 x 8 20 x 10 16 x 12	14 x 14	Flow Rate (cfm)	353	470	590	710	825	945	1180	1420	1650	1890	2120	
			Sound (NC)	-	-	-	19	24	28	35	40	45	49	53	
			Throw (ft)	0°	10-17-34	15-23-40	19-28-44	23-35-48	27-38-52	31-40-56	36-45-62	40-48-67	43-52-73	45-56-78	48-59-83
22.5°				8-14-27	12-18-32	15-22-35	18-28-38	22-30-42	25-32-45	29-35-50	32-38-54	34-42-58	36-45-62	38-47-66	
16 x 12	16 x 14	16 x 14	Throw (ft)	45°	5-8-17	8-11-20	10-14-22	12-17-24	13-19-26	15-20-28	18-22-31	20-24-34	21-26-36	23-28-39	24-30-41
				Flow Rate (cfm)	400	535	670	805	940	1070	1340	1610	1880	2140	2410
				Sound (NC)	-	-	-	20	24	28	35	41	45	50	53
				Throw (ft)	0°	11-18-36	16-24-42	20-30-47	24-37-51	28-40-56	32-43-59	39-47-65	42-52-72	45-56-78	48-60-83
22.5°	9-14-29	13-19-34	16-24-38		19-30-41	22-32-45	26-34-47	31-38-52	34-42-58	36-45-62	38-48-66	41-50-71			
18 x 12	16 x 14	16 x 14	Throw (ft)	45°	6-9-18	8-12-21	10-15-23	12-18-25	14-20-28	16-21-29	19-23-33	21-26-36	23-28-39	24-30-42	26-32-44
				Flow Rate (cfm)	480	540	800	960	1120	1280	1600	1920	2240	2560	2880
				Sound (NC)	-	-	15	21	25	29	36	42	46	50	54
				Throw (ft)	0°	13-20-40	18-26-46	22-32-51	27-39-56	31-43-60	35-46-64	42-51-72	46-56-79	49-61-85	53-65-91
22.5°	10-16-32	14-21-37	18-26-41		22-31-45	25-34-48	28-37-51	34-41-58	37-45-63	39-49-68	42-52-73	45-55-78			
18 x 14	16 x 16	16 x 16	Throw (ft)	45°	6-10-20	9-13-23	11-16-25	13-20-28	15-22-30	17-23-32	21-26-36	23-28-39	25-30-43	26-32-46	28-35-48
				Flow Rate (cfm)	540	720	900	1080	1260	1440	1800	2160	2520	2880	3240
				Sound (NC)	-	-	16	21	26	30	37	42	47	51	54
				Throw (ft)	0°	13-21-42	19-28-48	24-35-55	29-43-59	32-46-63	37-49-68	45-55-76	48-60-84	52-65-90	56-69-87
22.5°	10-17-34	15-22-38	19-28-44		23-34-47	26-37-50	30-39-54	36-44-61	38-48-67	42-52-72	45-55-78	48-58-82			
20 x 14	18 x 16	18 x 16	Throw (ft)	45°	7-11-21	9-14-24	12-17-27	14-21-29	16-23-32	19-24-34	22-27-38	24-30-42	26-32-45	28-35-48	30-37-51
				Flow Rate (cfm)	625	830	1040	1250	1460	1660	2080	2500	2910	3330	3740
				Sound (NC)	-	-	16	22	26	30	37	43	47	51	55
				Throw (ft)	0°	14-23-45	20-30-52	26-38-58	30-44-63	35-49-68	40-53-73	48-59-82	52-64-90	56-69-97	60-75-104
22.5°	11-18-36	16-24-42	21-30-46		24-35-50	28-39-54	32-42-58	38-47-66	42-51-72	45-55-78	48-60-83	51-63-88			
24 x 14	20 x 16	18 x 18	Throw (ft)	45°	7-11-23	10-15-26	13-19-29	15-22-32	17-25-34	20-26-37	24-29-41	26-32-45	28-35-48	30-37-52	32-40-55
				Flow Rate (cfm)	735	980	1220	1470	1720	1960	2450	2940	3430	3920	4410
				Sound (NC)	-	-	17	22	27	31	38	43	48	52	56
				Throw (ft)	0°	15-25-49	22-33-57	27-40-62	32-48-68	38-54-74	43-57-80	52-64-89	57-70-97	61-76-106	65-81-113
22.5°	12-20-39	18-26-46	22-32-50		26-38-54	30-43-59	34-46-64	42-51-71	46-56-78	49-61-85	52-65-90	56-70-96			
26 x 14	20 x 18	20 x 18	Throw (ft)	45°	7-12-24	11-16-28	14-20-31	16-24-34	19-27-37	22-28-40	26-32-45	28-35-49	32-38-53	33-42-56	35-43-60
				Flow Rate (cfm)	835	1110	1390	1670	1950	2220	2780	3340	3890	4450	5000
				Sound (NC)	-	-	17	23	28	32	38	44	49	53	56
				Throw (ft)	0°	16-26-52	23-34-60	29-42-67	35-50-73	40-57-79	45-61-85	55-68-95	60-75-104	65-81-112	70-87-122
22.5°	13-21-42	18-27-48	23-34-54		28-40-58	32-48-63	36-49-68	44-54-76	48-60-83	52-65-90	56-70-98	59-74-102			
26 x 16	22 x 20	22 x 20	Throw (ft)	45°	8-13-26	12-17-30	14-21-33	17-25-37	20-28-40	23-30-42	28-34-47	30-37-52	33-40-56	35-43-61	37-46-64

Performance Notes:

- Tested in accordance with ASHRAE Standard 70-2023 "Method of Testing for Rating the Performance of Air Outlets and Inlets."
- Air flow is in cfm.
- All pressures are in in. w.g.
- Throw values are measured in feet for terminal velocities of 150 fpm (minimum), 100 fpm (middle) and 50 fpm (maximum).
- Throw data is based on supply air and room air being at isothermal conditions.
- NC values are based on room absorption of 10 dB re 10⁻¹² Watts @ 0° deflection and one diffuser.
- Blanks "-" indicate an NC level below 15.
- Deflection 0°-22.5°-45°**
The listed deflection settings refer to horizontal deflection. For a 20° upward deflection, use the room throw rating for a 0° setting and the total pressure for a 22.5° horizontal setting. The performance tables are based on registers with core style 520 with an opposed blade damper. The performance of other core styles, with or without dampers, can be obtained by the application of correction factors to the tabulated performance data. See correction factor table at end of section.

PERFORMANCE DATA

510 / 520 / 610 / 620 / 710 / 720 - Supply

Size	NC 20				NC 30		NC 40		NC 50		NC 60	
	Core Velocity (fpm)	300	400	500	600	700	800	1000	1200	1400	1600	1800
	Velocity Pressure (in. w.g.)	0.006	0.01	0.016	0.022	0.03	0.04	0.062	0.09	0.122	0.159	0.202
	Total Pressure (in. w.g.)	0°	0.014	0.024	0.036	0.052	0.071	0.094	0.146	0.212	0.287	0.374
		22.5°	0.017	0.028	0.045	0.063	0.085	0.114	0.176	0.256	0.347	0.452
		45°	0.025	0.042	0.067	0.093	0.126	0.168	0.261	0.379	0.514	0.669
Ac = 3.11 ft²		Flow Rate (cfm)	935	1240	1560	1870	2180	2490	3110	3730	4350	4980
62 x 8		Sound (NC)	-	-	18	23	28	32	39	44	49	53
48 x 10		0°	17-27-55	24-35-63	34-45-71	41-53-78	47-60-84	48-64-90	58-72-100	64-79-110	69-86-118	74-92-128
40 x 12		22.5°	14-22-44	19-29-50	27-35-57	33-42-62	38-48-67	38-51-72	46-58-80	51-63-88	55-69-94	59-74-102
34 x 14		45°	8-14-28	12-18-31	17-22-35	20-26-39	23-30-42	24-32-45	29-36-50	32-40-55	35-43-59	37-46-64
30 x 16												
Ac = 3.61 ft²		Flow Rate (cfm)	1080	1440	1800	2170	2530	2890	3610	4330	5050	5780
72 x 8		Sound (NC)	-	-	19	24	29	33	40	45	50	54
58 x 10		0°	18-29-59	26-38-68	32-47-76	38-56-84	44-65-90	51-69-97	63-78-108	69-88-118	75-93-128	80-99-137
48 x 12		22.5°	14-23-47	21-30-54	26-38-61	30-45-67	35-52-72	41-55-78	50-62-86	55-69-94	60-74-102	64-79-110
36 x 16		45°	9-14-29	13-19-34	16-23-38	19-28-42	22-32-45	25-35-48	31-39-54	35-43-59	38-46-64	40-50-69
30 x 18												
Ac = 4.29 ft²		Flow Rate (cfm)	1290	1720	2140	2570	3000	3430	4290	5150	6010	6860
68 x 10		Sound (NC)	-	-	19	24	29	33	40	45	50	54
56 x 12		0°	19-31-64	28-41-74	35-50-83	42-60-91	49-71-98	56-76-106	69-85-118	76-93-130	82-102-140	88-108-149
48 x 14		22.5°	15-25-51	22-33-59	28-40-66	34-48-73	39-57-78	45-81-85	55-68-94	61-74-104	66-82-112	70-86-119
42 x 16		45°	10-15-32	14-20-37	17-25-42	21-30-46	24-35-49	28-38-53	34-43-59	38-47-65	41-51-70	44-54-75
36 x 18												
Ac = 4.65 ft²		Flow Rate (cfm)	1400	1880	2320	2790	3260	3720	4650	5580	6510	7440
72 x 10		Sound (NC)	-	-	20	25	30	34	41	46	51	55
60 x 12		0°	20-33-67	29-43-78	36-54-87	44-65-95	51-74-103	58-79-110	77-89-123	79-97-135	86-105-146	91-113-156
52 x 14		22.5°	16-26-54	23-34-62	29-43-70	35-52-76	41-59-82	46-63-88	58-71-98	63-78-108	69-84-117	73-90-125
44 x 16		45°	10-16-33	15-22-39	18-27-43	22-32-48	25-37-52	29-40-55	36-44-61	39-49-67	43-52-73	46-56-78
40 x 18												
Ac = 5.58 ft²		Flow Rate (cfm)	1670	2230	2790	3350	3910	4460	5580	6700	7810	8930
72 x 12		Sound (NC)	-	-	20	26	31	35	41	47	52	56
60 x 14		0°	22-36-73	31-47-85	40-59-95	47-72-104	55-81-113	63-87-122	79-97-135	87-107-148	93-116-160	100-125-171
54 x 16		22.5°	18-29-58	25-38-68	32-47-76	38-58-83	44-65-90	50-70-98	63-78-108	70-86-118	74-93-130	80-100-137
48 x 18		45°	11-18-37	16-23-43	20-30-48	23-36-52	28-41-57	31-44-61	39-49-67	43-53-74	47-53-80	50-62-86
42 x 20												
Ac = 6.25 ft²		Flow Rate (cfm)	1880	2500	3120	3750	4380	5000	6250	7500	8750	10,000
72 x 14		Sound (NC)	-	-	21	27	31	35	42	48	52	56
60 x 16		0°	23-37-78	33-49-90	42-62-100	50-75-103	58-86-119	67-93-128	84-104-143	92-113-156	96-123-169	106-132-180
54 x 18		22.5°	18-30-62	26-39-72	34-50-80	40-60-82	46-69-95	54-74-102	67-83-114	74-90-125	78-98-135	85-105-140
48 x 20		45°	12-19-39	17-25-45	21-31-50	25-37-51	29-43-60	34-46-64	42-52-72	46-57-78	49-61-85	53-66-90
40 x 24												

Performance Notes:

- Tested in accordance with ASHRAE Standard 70-2023 "Method of Testing for Rating the Performance of Air Outlets and Inlets."
- Air flow is in cfm.
- All pressures are in in. w.g.
- Throw values are measured in feet for terminal velocities of 150 fpm (minimum), 100 fpm (middle) and 50 fpm (maximum).
- Throw data is based on supply air and room air being at isothermal conditions.
- NC values are based on room absorption of 10 dB re 10⁻¹² Watts @ 0° deflection and one diffuser.
- Blanks "-" indicate an NC level below 15.
- Deflection** 0°-22.5°-45° The listed deflection settings refer to horizontal deflection. For a 20° upward deflection, use the room throw rating for a 0° setting and the total pressure for a 22.5° horizontal setting. The performance tables are based on registers with core style 520 with an opposed blade damper. The performance of other core styles, with or without dampers, can be obtained by the application of correction factors to the tabulated performance data.

Corrections for 500/600/700 Series Core Styles

Core Style	Opposed Blade Damper	Defl'n	Multiply		Add
			Core Style	NC	
520/620/720	Yes	0°	1	0	
		22.5°	1	2	
		45°	1	6	
510/60/720	Yes	0°	1	-4	
		22.5°	1	-1	
		45°	1	4	
520/620/720	No	0°	0.85	-7	
		22.5°	0.92	-3	
		45°	0.93	3	
510/610/710	No	0°	0.77	-10	
		22.5°	0.8	-6	
		45°	0.82	1	

PERFORMANCE DATA

510Z / 610Z / 710Z

Return with 0° Deflection and 3/4 in. Blade Spacing

Core Area (sq. ft.)	Nominal Size		Core Velocity (fpm)	300	400	500	600	700	800	1000	1100
			Velocity Pressure (in. w.g.)	0.006	0.010	0.016	0.022	0.031	0.040	0.062	0.075
			Neg. Static Pressure (in. w.g.)	0.012	0.022	0.035	0.050	0.068	0.089	0.138	0.167
0.15	7 x 4 6 x 5		Flow Rate (cfm)	45	60	75	90	105	120	150	165
			Sound (NC)	-	-	-	17	22	27	35	38
0.18	8 x 4 7 x 5	6 x 6	Flow Rate (cfm)	55	70	90	110	125	145	180	215
			Sound (NC)	-	-	-	18	23	28	36	39
0.22	10 x 4 8 x 5	7 x 6	Flow Rate (cfm)	65	90	110	130	155	175	220	265
			Sound (NC)	-	-	-	18	24	29	36	40
0.26	12 x 4 10 x 5	8 x 6	Flow Rate (cfm)	80	105	130	155	180	210	260	310
			Sound (NC)	-	-	-	19	25	29	37	40
0.30	14 x 4		Flow Rate (cfm)	90	120	150	180	210	240	300	330
			Sound (NC)	-	-	-	20	25	30	38	41
0.34	16 x 4 12 x 5	10 x 6	Flow Rate (cfm)	100	135	170	205	240	270	340	410
			Sound (NC)	-	-	-	20	26	30	38	41
0.39	18 x 4 14 x 5	12 x 6 8 x 8	Flow Rate (cfm)	115	155	195	235	275	310	390	470
			Sound (NC)	-	-	-	21	26	31	39	42
0.46	20 x 4 16 x 5	14 x 6 10 x 8	Flow Rate (cfm)	138	184	230	276	322	368	460	506
			NC Sound (NC)	-	-	15	21	27	32	39	43
0.52	24 x 4 18 x 5	16 x 6	Flow Rate (cfm)	156	208	260	312	364	416	520	572
			Sound (NC)	-	-	16	22	27	32	40	43
0.60	28 x 4 20 x 5	18 x 6 12 x 8	Flow Rate (cfm)	180	240	300	360	420	480	600	660
			Sound (NC)	-	-	16	23	28	33	40	44
0.69	30 x 4 24 x 5	20 x 6 14 x 8	Flow Rate (cfm)	207	276	345	414	483	552	690	759
			Sound (NC)	-	-	17	23	29	33	41	44
0.81	36 x 4 28 x 5	22 x 6 16 x 8	Flow Rate (cfm)	243	324	405	486	567	648	810	891
			Sound (NC)	-	-	17	24	29	34	42	45
0.9	40 x 4 32 x 5	26 x 6 18 x 8	Flow Rate (cfm)	273	364	455	546	637	728	910	1001
			Sound (NC)	-	-	18	24	30	34	42	45
1.07	42 x 4 36 x 5	30 x 6 22 x 8	Flow Rate (cfm)	321	428	535	642	749	856	1070	1177
			Sound (NC)	-	-	19	25	30	35	43	46
1.18	34 x 6 24 x 8	20 x 10 16 x 12	Flow Rate (cfm)	354	472	590	708	826	944	1180	1298
			Sound (NC)	-	-	19	25	31	35	43	47
1.34	38 x 6 28 x 8	22 x 10 18 x 12	Flow Rate (cfm)	402	536	670	804	938	1072	1340	1474
			Sound (NC)	-	-	19	26	31	36	44	47
1.60	44 x 6 32 x 8	26 x 10 22 x 12	Flow Rate (cfm)	480	640	800	960	1120	1280	1600	1760
			Sound (NC)	-	-	20	27	32	37	44	48
1.80	50 x 6 36 x 8	30 x 10 24 x 12	Flow Rate (cfm)	540	720	900	1080	1260	1440	1800	1980
			Sound (NC)	-	-	21	27	32	37	45	48
2.08	58 x 6 42 x 8	34 x 10 28 x 12	Flow Rate (cfm)	624	832	1040	1248	1456	1664	2080	2288
			Sound (NC)	-	-	21	28	33	38	45	49
2.45	50 x 8 38 x 10	32 x 12 24 x 16	Flow Rate (cfm)	735	980	1225	1470	1715	1960	2450	2695
			Sound (NC)	-	-	22	28	34	38	46	49
2.78	56 x 8 44 x 10	36 x 12 30 x 14	Flow Rate (cfm)	834	1112	1390	1668	1946	2224	2780	3058
			Sound (NC)	-	15	22	29	34	39	47	50
3.11	48 x 10 40 x 12	34 x 14 30 x 16	Flow Rate (cfm)	933	1244	1555	1866	2177	2488	3110	3421
			Sound (NC)	-	15	23	29	35	39	47	50
3.61	56 x 10 48 x 12	40 x 14 34 x 16	Flow Rate (cfm)	1083	1444	1805	2166	2527	2888	3610	3971
			Sound (NC)	-	16	24	30	35	40	48	51
4.29	56 x 12 48 x 14	40 x 16 36 x 18	Flow Rate (cfm)	1287	1716	2145	2574	3003	3432	4290	4719
			Sound (NC)	-	16	24	31	36	41	48	52
4.65	60 x 12 50 x 14	44 x 16 40 x 18	Flow Rate (cfm)	1395	1860	2325	2790	3255	3720	4650	5115
			Sound (NC)	-	17	25	31	36	41	49	52
5.58	60 x 14 54 x 16	48 x 18 42 x 20	Flow Rate (cfm)	1674	2232	2790	3348	3906	4464	5580	6138
			Sound (NC)	-	17	25	32	37	42	50	53
6.25	72 x 14 60 x 16	52 x 18 48 x 20	Flow Rate (cfm)	1875	2500	3125	3750	4375	5000	6250	6875
			Sound (NC)	-	18	26	32	37	42	50	53

Performance Notes:

- Tested in accordance with ASHRAE Standard 70-2023 "Method of Testing for Rating the Performance of Air Outlets and Inlets."
- Air flow is in cfm.
- All pressures are in in. w.g.
s.p. = Static Pressure
- NC values are based on room absorption of 10 dB re 10⁻¹² Watts and one grille.
- Performance data is for a grille complete with opposed blade damper in the full open position.
- Blanks "-" indicate an NC level below 15.
- Correction factors to be applied to table for no damper: loss - multiply by 0.82, NC - subtract 12.

PERFORMANCE DATA

530 / 530FF / 630 / 630FF / 730 / 730FF / 730H

Return with 45° Deflection 3/4 in. Blade Spacing

Core Area (sq. ft.)	Nominal Size		NC 20										NC 30					NC 40
			Core Velocity (fpm)	200	300	400	500	600	700	800	900	1000	1100					
			Velocity Pressure (in. w.g.)	0.002	0.006	0.01	0.016	0.022	0.031	0.040	0.050	0.062	0.075					
			Neg. Static Pressure (in. w.g.)	0.011	0.025	0.044	0.069	0.100	0.136	0.177	0.224	0.277	0.335					
0.15	7 x 4		Flow Rate (cfm)	30	45	60	75	90	105	120	135	150	165					
	6 x 5		Sound (NC)	-	-	-	19	24	28	32	35	38	40					
0.18	8 x 4	6 x 6	Flow Rate (cfm)	36	54	72	90	108	126	144	162	180	198					
	7 x 5		Sound (NC)	-	-	-	19	24	28	32	35	38	41					
0.22	10 x 4	7 x 6	Flow Rate (cfm)	44	66	88	110	132	154	176	198	220	242					
	8 x 5		Sound (NC)	-	-	-	20	25	29	33	36	39	41					
0.26	12 x 4	8 x 6	Flow Rate (cfm)	52	78	104	130	156	182	208	234	260	286					
	10 x 5		Sound (NC)	-	-	-	20	25	29	33	36	39	42					
0.30	14 x 4		Flow Rate (cfm)	60	90	120	150	180	210	240	270	300	330					
			Sound (NC)	-	-	15	21	26	30	33	37	40	42					
0.34	16 x 4	10 x 6	Flow Rate (cfm)	68	102	136	170	204	238	272	306	340	374					
	12 x 5		Sound (NC)	-	-	15	21	26	30	34	37	40	43					
0.39	18 x 4	12 x 6	Flow Rate (cfm)	78	117	156	195	234	273	312	351	390	429					
	14 x 5	8 x 8	Sound (NC)	-	-	15	21	26	31	34	37	40	43					
0.46	20 x 4	14 x 6	Flow Rate (cfm)	92	138	184	230	276	322	368	414	460	506					
	16 x 5	10 x 8	Sound (NC)	-	-	16	22	27	31	35	38	41	43					
0.52	24 x 4	16 x 6	Flow Rate (cfm)	104	156	208	260	312	364	416	468	520	572					
	18 x 5		Sound (NC)	-	-	16	22	27	31	35	38	41	44					
0.60	28 x 4	18 x 6	10 x 10	Flow Rate (cfm)	120	180	240	300	360	420	480	540	600	660				
	20 x 5	12 x 8		Sound (NC)	-	-	16	23	28	32	35	39	42	44				
0.69	30 x 4	20 x 6	12 x 10	Flow Rate (cfm)	138	207	276	345	414	483	552	621	690	759				
	24 x 5	14 x 8		Sound (NC)	-	-	17	23	28	32	36	39	42	45				
0.81	36 x 4	22 x 6	14 x 10	Flow Rate (cfm)	162	243	324	405	486	567	648	729	810	891				
	28 x 5	16 x 8		Sound (NC)	-	-	17	23	28	33	36	40	42	45				
0.90	40 x 4	26 x 6	16 x 10	Flow Rate (cfm)	182	273	364	455	546	637	728	819	910	1001				
	32 x 5	18 x 8	12 x 12	Sound (NC)	-	-	18	24	29	33	37	40	43	45				
1.07	42 x 4	30 x 6	18 x 10	Flow Rate (cfm)	214	321	428	535	642	749	856	963	1070	1177				
	36 x 5	22 x 8	14 x 12	Sound (NC)	-	-	18	24	29	33	37	40	43	46				
1.18	34 x 6	20 x 10	14 x 14	Flow Rate (cfm)	236	354	472	590	708	826	944	1062	1180	1298				
	24 x 8	16 x 12		Sound (NC)	-	-	18	25	29	34	37	41	43	46				
1.34	38 x 6	22 x 10	16 x 14	Flow Rate (cfm)	268	402	536	670	804	938	1072	1206	1340	1474				
	28 x 8	18 x 12		Sound (NC)	-	-	19	25	30	34	38	41	44	46				
1.60	44 x 6	26 x 10	18 x 14	Flow Rate (cfm)	320	480	640	800	960	1120	1280	1440	1600	1760				
	32 x 8	22 x 12	16 x 16	Sound (NC)	-	-	19	25	30	35	38	41	44	47				
1.80	50 x 6	30 x 10	20 x 14	Flow Rate (cfm)	360	540	720	900	1080	1260	1440	1620	1800	1980				
	36 x 8	24 x 12	18 x 16	Sound (NC)	-	-	20	26	31	35	39	42	45	47				
2.08	58 x 6	34 x 10	24 x 14	Flow Rate (cfm)	416	624	832	1040	1248	1456	1664	1872	2080	2288				
	42 x 8	28 x 12	20 x 16	Sound (NC)	-	-	20	26	31	35	39	42	45	48				
2.45	50 x 8	32 x 12	24 x 16	Flow Rate (cfm)	490	735	980	1225	1470	1715	1960	2205	2450	2695				
	38 x 10	28 x 14	20 x 18	Sound (NC)	-	-	20	27	32	36	39	43	46	48				
2.78	56 x 8	36 x 12	26 x 16	Flow Rate (cfm)	556	834	1112	1390	1668	1946	2224	2502	2780	3058				
	44 x 10	30 x 14	24 x 18	Sound (NC)	-	-	21	27	32	36	40	43	46	48				
3.11	48 x 10	34 x 14	26 x 18	Flow Rate (cfm)	622	933	1244	1555	1866	2177	2488	2799	3110	3421				
	40 x 12	30 x 16	24 x 20	Sound (NC)	-	-	21	27	32	36	40	43	46	49				
3.61	56 x 10	40 x 14	30 x 18	Flow Rate (cfm)	722	1083	1444	1805	2166	2527	2888	3249	3610	3971				
	48 x 12	34 x 16	28 x 20	Sound (NC)	-	-	22	28	33	37	41	44	47	49				
4.29	56 x 12	40 x 16	32 x 20	Flow Rate (cfm)	858	1287	1716	2145	2574	3003	3432	3861	4290	4719				
	48 x 14	36 x 18	30 x 22	Sound (NC)	-	-	22	28	33	37	41	44	47	50				
4.65	60 x 12	44 x 16	36 x 20	Flow Rate (cfm)	930	1395	1860	2325	2790	3255	3720	4185	4650	5115				
	50 x 14	40 x 18	32 x 22	Sound (NC)	-	-	22	28	33	38	41	44	47	50				
5.58	60 x 14	48 x 18	38 x 22	Flow Rate (cfm)	1116	1674	2232	2790	3348	3906	4464	5022	5580	6138				
	54 x 16	42 x 20	36 x 24	Sound (NC)	-	15	23	29	34	38	42	45	48	50				
6.25	72 x 14	52 x 18	40 x 24	Flow Rate (cfm)	1250	1875	2500	3125	3750	4375	5000	5625	6250	6875				
	60 x 16	48 x 20	32 x 30	Sound (NC)	-	15	23	29	34	38	42	45	48	51				
				NC 20				NC 30		NC 40		NC 50						

Performance Notes:

- Tested in accordance with ASHRAE Standard 70-2023 "Method of Testing for Rating the Performance of Air Outlets and Inlets."
- Air flow is in cfm.
- All pressures are in in. w.g.
- Performance data is for grille complete with opposed blade damper in the full open position.
- NC values are based on room absorption of 10 dB re 10⁻¹² Watts and one grille.
- Blanks "-" indicate an NC level below 15.
- Correction factors to be applied to table for no damper: pressure loss - multiply by 0.91, NC - subtract 5.
- Does not include pressure drop on FF models.
- Does not include effects of ceiling radiation damper (530-FR, 530 FF-FR)

PERFORMANCE DATA

535 / 535FF / 635 / 635FF / 735 / 735FF / 735H

Return with 45° Deflection and 1/2 in. Blade Spacing

Core Area (sq. ft.)	Nominal Size	Core Velocity (fpm) Velocity Pressure (in. w.g.) Neg. Static Pressure (in. w.g.)	NC 20					NC 30				NC 40		
			200	300	400	500	600	700	800	900	1000	1100		
			0.002	0.006	0.010	0.016	0.022	0.031	0.040	0.050	0.062	0.075		
			0.015	0.035	0.062	0.097	0.139	0.190	0.248	0.314	0.387	0.468		
0.15	7 x 4	Flow Rate (cfm)	30	45	60	75	90	105	120	135	150	165		
	6 x 5	Sound (NC)	-	-	-	19	24	28	32	36	39	41		
0.18	8 x 4	Flow Rate (cfm)	36	54	72	90	108	126	144	162	180	198		
	7 x 5	Sound (NC)	-	-	-	19	25	29	33	36	39	42		
0.22	10 x 4	Flow Rate (cfm)	44	66	88	110	132	154	176	198	220	242		
	8 x 5	Sound (NC)	-	-	-	20	25	30	34	37	40	43		
0.26	12 x 4	Flow Rate (cfm)	52	78	104	130	156	182	208	234	260	286		
	10 x 5	Sound (NC)	-	-	-	21	26	31	34	38	41	43		
0.30	14 x 4	Flow Rate (cfm)	60	90	120	150	180	210	240	270	300	330		
		Sound (NC)	-	-	15	21	27	31	35	38	41	44		
0.34	16 x 4	Flow Rate (cfm)	68	102	136	170	204	238	272	306	340	374		
	12 x 5	Sound (NC)	-	-	16	22	27	32	35	39	42	45		
0.39	18 x 4	Flow Rate (cfm)	78	117	156	195	234	273	312	351	390	429		
	14 x 5	Sound (NC)	-	-	16	22	28	32	36	39	42	45		
0.46	20 x 4	Flow Rate (cfm)	92	138	184	230	276	322	368	414	460	506		
	16 x 5	Sound (NC)	-	-	17	23	28	33	37	40	43	46		
0.52	24 x 4	Flow Rate (cfm)	104	156	208	260	312	364	416	468	520	572		
	18 x 5	Sound (NC)	-	-	17	24	29	33	37	40	43	46		
0.60	28 x 4	Flow Rate (cfm)	120	180	240	300	360	420	480	540	600	660		
	20 x 5	Sound (NC)	-	-	18	24	29	34	38	41	44	47		
0.69	30 x 4	Flow Rate (cfm)	138	207	276	345	414	483	552	621	690	759		
	24 x 5	Sound (NC)	-	-	18	25	30	34	38	42	45	47		
0.81	36 x 4	Flow Rate (cfm)	162	243	324	405	486	567	648	729	810	891		
	28 x 5	Sound (NC)	-	-	19	25	31	35	39	42	45	48		
0.90	40 x 4	Flow Rate (cfm)	182	273	364	455	546	637	728	819	910	1001		
	30 x 5	Sound (NC)	-	-	19	26	31	35	39	43	46	48		
1.07	42 x 4	Flow Rate (cfm)	214	321	428	535	642	749	856	963	1070	1177		
	36 x 5	Sound (NC)	-	-	20	26	32	36	40	43	46	49		
1.18	34 x 6	Flow Rate (cfm)	236	354	472	590	708	826	944	1062	1180	1298		
	24 x 8	Sound (NC)	-	-	20	27	32	36	40	44	47	49		
1.34	38 x 6	Flow Rate (cfm)	268	402	536	670	804	938	1072	1206	1340	1474		
	28 x 8	Sound (NC)	-	-	21	27	33	37	41	44	47	50		
1.60	44 x 6	Flow Rate (cfm)	320	480	640	800	960	1120	1280	1440	1600	1760		
	32 x 8	Sound (NC)	-	-	22	28	33	38	41	45	48	51		
1.80	50 x 6	Flow Rate (cfm)	360	540	720	900	1080	1260	1440	1620	1800	1980		
	36 x 8	Sound (NC)	-	-	22	28	34	38	42	45	48	51		
2.08	58 x 6	Flow Rate (cfm)	416	624	832	1040	1248	1456	1664	1872	2080	2288		
	42 x 8	Sound (NC)	-	-	23	29	34	39	42	46	49	52		
2.45	50 x 8	Flow Rate (cfm)	490	735	980	1225	1470	1715	1960	2205	2450	2695		
	38 x 10	Sound (NC)	-	15	23	30	35	39	43	46	50	52		
2.78	56 x 8	Flow Rate (cfm)	556	834	1112	1390	1668	1946	2224	2502	2780	3058		
	44 x 10	Sound (NC)	-	15	24	30	35	40	44	47	50	53		
3.11	48 x 10	Flow Rate (cfm)	622	933	1244	1555	1866	2177	2488	2799	3110	3421		
	40 x 12	Sound (NC)	-	16	24	31	36	40	44	47	50	53		
3.61	56 x 10	Flow Rate (cfm)	722	1083	1444	1805	2166	2527	2888	3249	3610	3971		
	48 x 12	Sound (NC)	-	17	25	31	36	41	45	48	51	54		
4.29	56 x 12	Flow Rate (cfm)	858	1287	1716	2145	2574	3003	3432	3861	4290	4719		
	48 x 14	Sound (NC)	-	17	25	32	37	41	45	49	52	54		
4.65	60 x 12	Flow Rate (cfm)	930	1395	1860	2325	2790	3255	3720	4185	4650	5115		
	50 x 14	Sound (NC)	-	17	26	32	37	42	46	49	52	55		
5.58	60 x 14	Flow Rate (cfm)	1116	1674	2232	2790	3348	3906	4464	5022	5580	6138		
	54 x 16	Sound (NC)	-	18	26	33	38	42	46	50	53	55		
6.25	72 x 14	Flow Rate (cfm)	1250	1875	2500	3125	3750	4375	5000	5625	6250	6875		
	60 x 16	Sound (NC)	-	19	27	33	39	43	47	50	53	56		

Performance Notes:

- Tested in accordance with ASHRAE Standard 70-2023 "Method of Testing for Rating the Performance of Air Outlets and Inlets."
- Air flow is in cfm.
- All pressures are in in. w.g.
- Performance data is for grille complete with opposed blade damper in the full open position.
- NC values are based on room absorption of 10 dB re 10⁻¹² Watts and one grille.
- Blanks "-" indicate an NC level below 15.
- Correction factors to be applied to table for no damper: pressure loss - multiply by 0.81, NC - subtract 2.
- Does not include pressure drop on FF models.
- Does not include effects of ceiling radiation damper (535-FR, 535FF-FR)



Product Improvement is a continuing endeavour at Price. Therefore, specifications are subject to change without notice. Consult your Price Sales Representative for current specifications or more detailed information. Not all products may be available in all geographic areas. All goods described in this document are warranted as described in the Limited Warranty shown at [priceindustries.com](https://www.priceindustries.com). The complete Price product catalog can be viewed online at [priceindustries.com](https://www.priceindustries.com).