
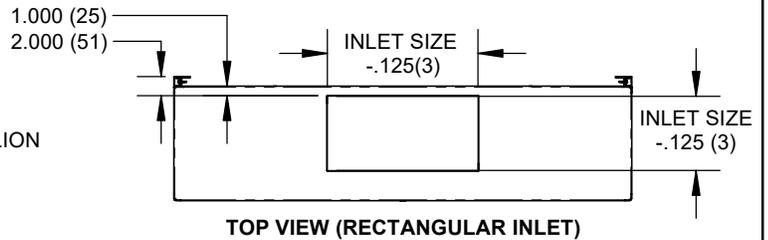
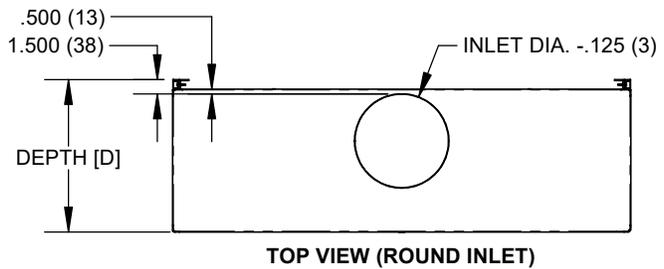


DFE-DISPLACEMENT FLOW EXPOSED DIFFUSER

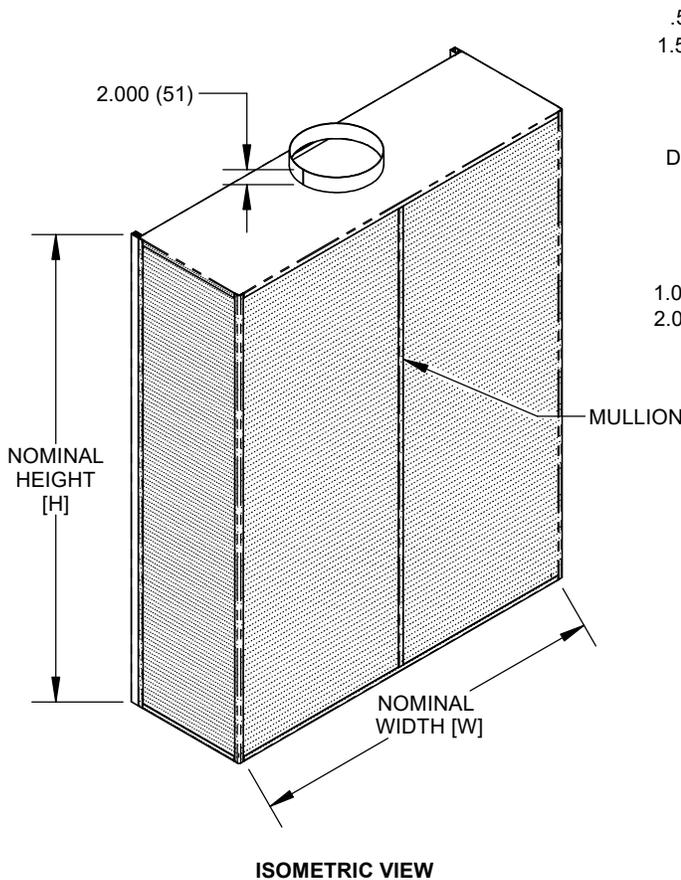

DIFFUSER MATERIAL:

- PERFORATED PANELS- 16 GA STEEL
- SOLID PANELS- 20 GA STEEL
- FRAME- EXTRUDED ALUMINUM

SIZE

WIDTH AND HEIGHT (W x H):

- MINIMUM SIZE: 24" x 24" (610 x 610)
- MAXIMUM SIZE: 48" x 60" (1219 x 1524) OR 60" x 48" (1524 x 1219)

DEPTH, D:

- 13" (330) TO 18" (457)

NOTES:

- WIDTHS (W) EQUAL TO OR GREATER THAN 36" (914) WILL HAVE A CENTER MULLION
- ALL UNITS COME WITH INTERNAL BAFFLE

AIR PATTERN:

- ONE-WAY (1W)
- THREE-WAY (3W)

INLET LOCATION:

- TOP (T)
- REAR (R)

INLET SIZES:

- 10" (254) ROUND
- 12" (305) ROUND
- 14" (356) ROUND
- 14" x 6" (356 x 152) RECTANGULAR
- 16" x 8" (406 x 203) RECTANGULAR
- 18" x 8" (457 x 203) RECTANGULAR
- 20" x 10" (508 x 254) RECTANGULAR
- 24" x 8" (610 x 203) RECTANGULAR

PROTECTIVE FILM (PF):

- PROTECTIVE FILM ON FACE AND INLET

ACCESSORIES:

- BASE COVER- SEE SUBMITTAL 270073
- DUCT COVER- SEE SUBMITTAL 270073

FINISH:

- B12 STANDARD WHITE
- B11 PURE WHITE
- B15 GREY
- B17 BLACK
- PC12 PRIME COAT
- B25 CUSTOM MATCHED COLOR
- SPECIAL COLOR

ALL METRIC DIMENSIONS [] ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE	
ENGINEER:		APPROVED BY: <i>mbe</i>	DFE DISPLACEMENT FLOW EXPOSED DIFFUSER
CUSTOMER:		DRAWING NO: 270072	
SUBMITTAL DATE:	SPEC. SYMBOL:	DATE DRAWN: 05/17/2024	