
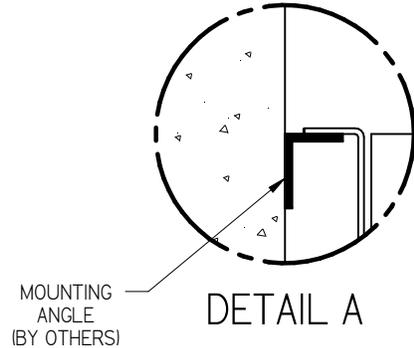
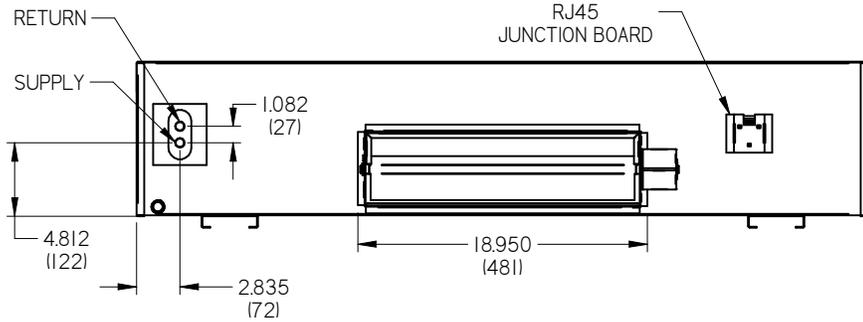
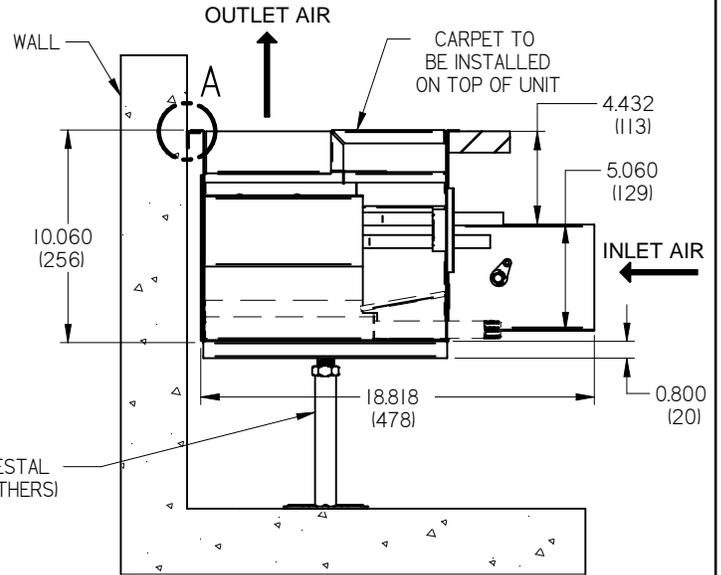


LCT - 2 PIPE

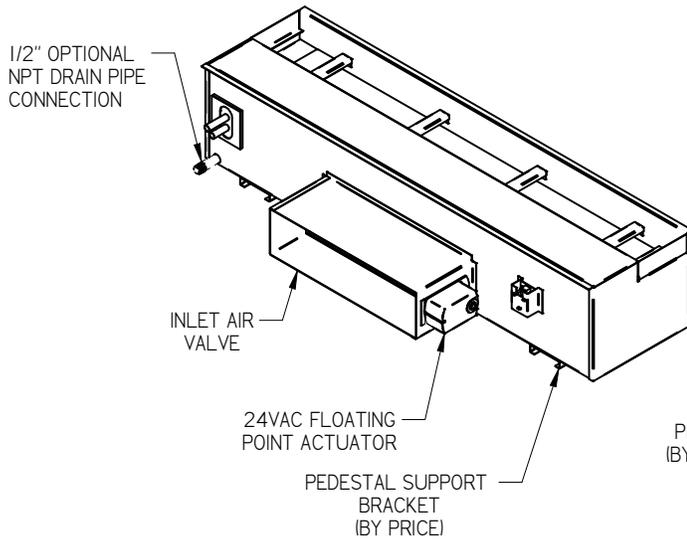

PLENUM:

- 16 GA STEEL CONSTRUCTION
- FINISH - B17 BLACK POWDER PAINT
- LFG WITH 1000 STYLE BORDER ORDERED SEPARATELY
- BLANK-OFF SECTION ORDERED SEPARATELY

COIL TYPE:

- 2 PIPE, 1 CIRCUIT
(2 ROW HEATING/COOLING)

PLENUM DAMPER:

- COMES WITH 24VAC ACTUATOR DAISY CHAINED TOGETHER FOR SINGLE CONNECTION

NOTES:

- FACTORY TOLERANCE +/- 1/32" (1)
- SELF-SUPPORTING TROUGH, NOT TO BE STEPPED ON UNTIL THE RAISED FLOOR AND PERIMETER WALL HAS BEEN BUILT AROUND IT FOR LATERAL SUPPORT
- PEDESTAL AND PEDESTAL HEAD BY OTHERS

OVERFLOW PROTECTION:

- OVERFLOW SAFETY FLOAT SWITCH FOR DRAIN PAN

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

	ROUGH OPENING NOM L X W	UNIT SIZE	PEDESTAL BRACKET QTY	GRILLE SIZE
<input type="checkbox"/>	* 48 X 12 (1219 X 305)	47 1/4 X 11 1/4 (1216 X 302)	2	47 3/4 X 6 (1213 X 152)
<input type="checkbox"/>	* 72 X 12 (1829 X 305)	71 1/4 X 11 1/4 (1826 X 302)	3	71 3/4 X 6 (1822 X 152)
<input type="checkbox"/>	** 96 X 12 (2438 X 305)	95 1/4 X 11 1/4 (2435 X 302)	4	95 3/4 X 6 (2432 X 152)
<input type="checkbox"/>	** 120 X 12 (3048 X 305)	119 1/4 X 11 1/4 (3045 X 302)	5	119 3/4 X 6 (3042 X 152)

NOTE: * - COMES WITH 1 INLET AIR VALVE
 ** - COMES WITH 2 INLET AIR VALVES

CFLEX CONTROL CABLE (PURPLE):

- 15P - 15 FT. STRANDED
- 25P - 25 FT. STRANDED
- 35P - 35 FT. STRANDED

DRAIN PAN:

- STAINLESS STEEL DRAIN PAN

PROJECT:

ENGINEER:





CUSTOMER:

SUBMITTAL DATE:

SPEC. SYMBOL:

PRICE	
<i>PS</i>	LCT HIGH CAPACITY HEATING/COOLING TERMINAL 2 PIPE
274150	2024/11/28

LCT - 4 PIPE

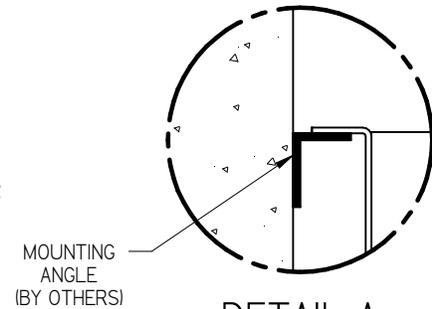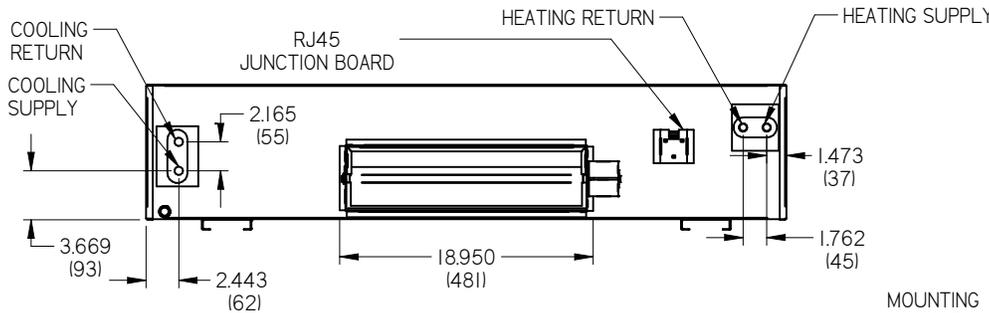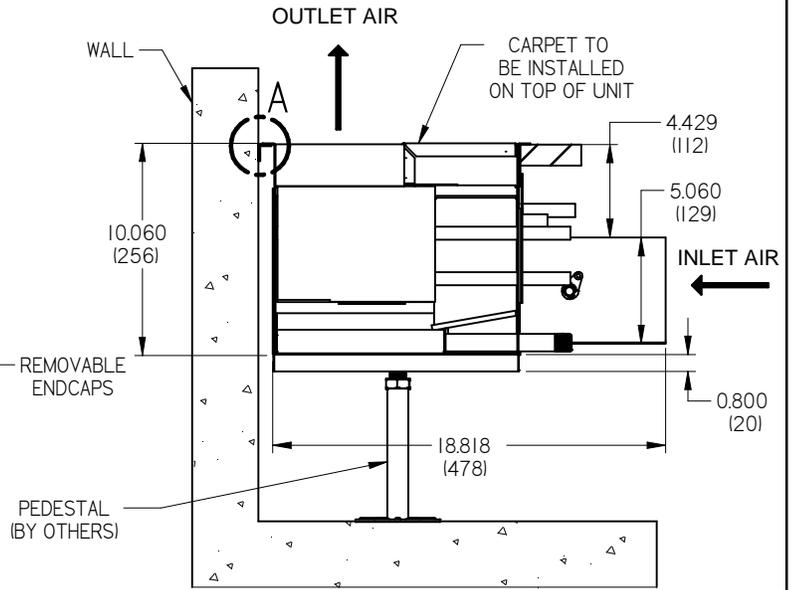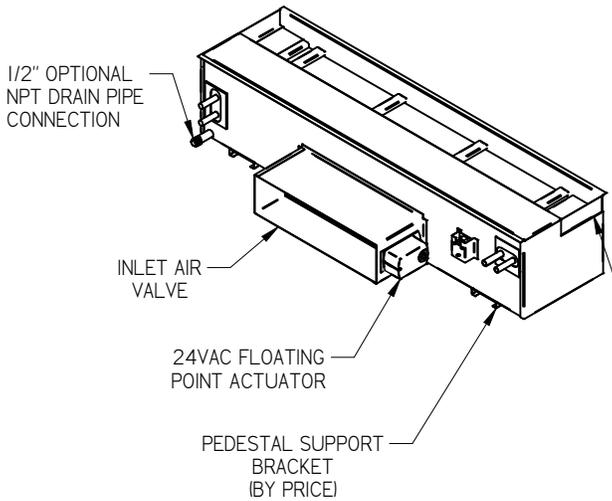

- PLENUM:**
- 16 GA STEEL CONSTRUCTION
 - FINISH - B17 BLACK POWDER PAINT
 - LFG WITH 1000 STYLE BORDER ORDERED SEPARATELY
 - BLANK-OFF SECTION ORDERED SEPARATELY

- COIL TYPE:**
- 4 PIPE, 3 CIRCUIT
 - (1 ROW HEATING 3 ROW COOLING)

- DRAIN PAN:**
- STAINLESS STEEL DRAIN PAN

- PLENUM DAMPER:**
- COMES WITH 24VAC ACTUATOR DAISY CHAINED TOGETHER FOR SINGLE CONNECTION

- NOTES:**
- FACTORY TOLERANCE +/- 1/32" (1)
 - SELF-SUPPORTING TROUGH, NOT TO BE STEPPED ON UNTIL THE RAISED FLOOR AND PERIMETER WALL HAS BEEN BUILT AROUND IT FOR LATERAL SUPPORT
 - PEDESTAL AND PEDESTAL HEAD BY OTHERS

- CFLEX CONTROL CABLE (PURPLE):**
- 15P - 15 FT. STRANDED
 - 25P - 25 FT. STRANDED
 - 35P - 35 FT. STRANDED

- OVERFLOW PROTECTION:**
- OVERFLOW SAFETY FLOAT SWITCH FOR DRAIN PAN

	ROUGH OPENING NOM L X W	UNIT SIZE	PEDESTAL BRACKET QTY	GRILLE SIZE
<input type="checkbox"/>	* 48 X 12 (1219 X 305)	47 3/4 X 11 1/4 (1216 X 302)	2	47 3/4 X 6 (1213 X 152)
<input type="checkbox"/>	* 72 X 12 (1829 X 305)	71 3/4 X 11 1/4 (1826 X 302)	3	71 3/4 X 6 (1822 X 152)
<input type="checkbox"/>	** 96 X 12 (2438 X 305)	95 3/4 X 11 1/4 (2435 X 302)	4	95 3/4 X 6 (2432 X 152)
<input type="checkbox"/>	** 120 X 12 (3048 X 305)	119 3/4 X 11 1/4 (3045 X 302)	5	119 3/4 X 6 (3042 X 152)

NOTE: * - COMES WITH 1 INLET AIR VALVE
 ** - COMES WITH 2 INLET AIR VALVES

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE
ENGINEER: PS		
CUSTOMER:		274151
SUBMITTAL DATE:	SPEC. SYMBOL:	2024/11/28
		LCT HIGH CAPACITY HEATING/COOLING TERMINAL 4 PIPE