



LFG - LINEAR FLOOR GRILLE (PRESSED CORE)

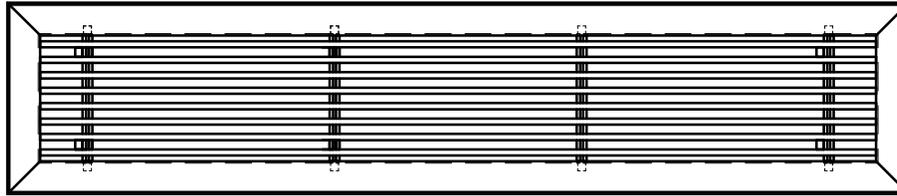


END CONDITION

- XX - BOTH MITRED ENDS
- XY - ONE MITRED END & ONE OPEN END

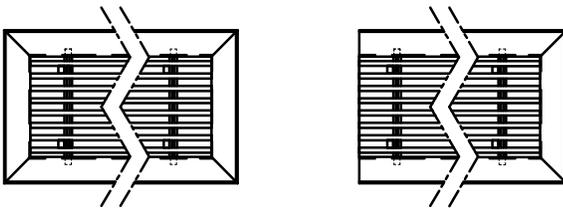

- YY - BOTH OPEN ENDS



CORE STYLES

1/4" SPACING	7/16" SPACING PENCIL PROOF
<input type="checkbox"/> 15A - 3/32" (2) BARS 0° DEFLECTION	<input type="checkbox"/> 25C - 3/16" (5) BARS 0° DEFLECTION
<input type="checkbox"/> 16A - 1/8" (3) BARS 15° DEFLECTION	<input type="checkbox"/> 26C - 3/16" (5) BARS 15° DEFLECTION
 CORE CLIPS • CORE CLIPS ARE SUPPLIED STANDARD ON ALL LFG GRILLES	<input type="checkbox"/> 27C - 3/16" (5) BARS 30° DEFLECTION

NOTES:

- EXTRUDED ALUMINUM CONSTRUCTION
- BARS ARE FIXED AND PARALLEL TO LONG DIMENSION
- MAXIMUM 6" BETWEEN ADJACENT CORE SPACER BARS
- MAXIMUM LENGTH ONE PIECE CONSTRUCTION = 72"
- SECTIONS CAN BE JOINED FOR CONTINUOUS APPEARANCE
- MAXIMUM WIDTH = 12"
- SCREW MOUNTING HOLES PER FACTORY STANDARD
- FACTORY TOLERANCE: +/- 1/32" (1) PER GRILLE SECTION
- REMOVABLE CORE W/ CORE CLIPS
- DESIGNED FOR LIGHT FOOT TRAFFIC
- NOT DESIGNED TO WITHSTAND LOADS FROM MECHANICAL EQUIPMENT SUCH AS CARTS, FORKLIFTS, ETC.
- CORE ONLY BORDER STYLE REQUIRES ADDITIONAL SUPPORT BY OTHERS

FINISH:

- B11 - PURE WHITE
- B12 - WHITE - POWDER COAT
- B13 - OFF-WHITE - POWDER COAT
- B15 - ALUMINUM - POWDER COAT
- B17 - BLACK - POWDER COAT

- B25 - COLOR TO MATCH
- PC12 - PRIME COAT - POWDER COAT
- 66 - BRUSHED AND POWDER COAT CLEAR
- MILL - RAW ALUMINUM
- PA - PREPARED ALUMINUM - MILL FINISH FACTORY CLEANED
- AB - ANODIZED BLACK
- AC - ANODIZED CLEAR
- ALB - ANODIZED LIGHT BRONZE
- AMB - ANODIZED MEDIUM BRONZE
- ADB - ANODIZED DARK BRONZE
- ASPL - ANODIZED COLOR OTHER THAN LISTED
- SPL - SPECIAL FINISHES

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

NOTE: ORDER CCRT FOR CORE CLIP REMOVAL TOOL

PROJECT:

ENGINEER:

CUSTOMER:

SUBMITTAL DATE:

SPEC. SYMBOL:



PS


263828

2024/07/26


LFG
LINEAR FLOOR
GRILLE
PRESSED CORE

LFG - LINEAR FLOOR GRILLE (PRESSED CORE)


BORDER STYLES

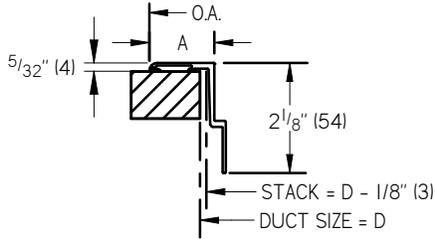


BORDER STYLE	BORDER WIDTH (A)	OVERALL (O.A.)
<input type="checkbox"/> 1250	1 1/4" (32)	D + 2 1/8" (54)
<input type="checkbox"/> 1000	1" (25)	D + 1 5/8" (41)
<input type="checkbox"/> 750	3/4" (19)	D + 1 1/8" (29)

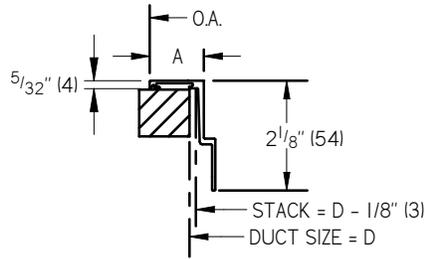

BORDER STYLE	BORDER WIDTH (A)	OVERALL (O.A.)
<input type="checkbox"/> 1000S	1" (25)	D + 1 5/8" (41)

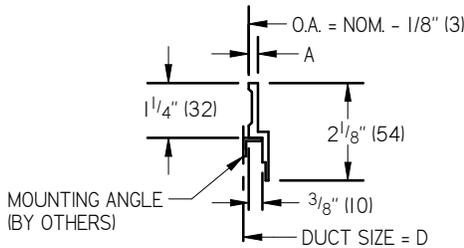


BORDER STYLE	BORDER WIDTH (A)	OVERALL (O.A.)
<input type="checkbox"/> 125	1/8" (3)	D - 1/8" (3)
<input type="checkbox"/> 187	3/16" (5)	D - 1/8" (3)




BORDER STYLE	BORDER WIDTH (A)	OVERALL (O.A.)
<input type="checkbox"/> CORE ONLY	N/A	D


FASTENING

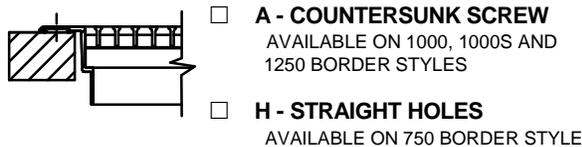

- A - COUNTERSUNK SCREW**
AVAILABLE ON 1000, 1000S AND 1250 BORDER STYLES
- H - STRAIGHT HOLES**
AVAILABLE ON 750 BORDER STYLE



- B - SPRING CLIP**
NOT AVAILABLE FOR 125 AND 187 BORDER STYLES



- C - CONCEALED MOUNTING BRACKET**
REMOVE CORE FOR ACCESS TO CONCEALED BRACKET


ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		 LFG LINEAR FLOOR GRILLE PRESSED CORE
ENGINEER:	<i>PS</i>	
CUSTOMER:	263828	
SUBMITTAL DATE:	2024/07/26	
SPEC. SYMBOL:		

LFG - LINEAR FLOOR GRILLE (PRESSED CORE)


ACCESSORIES

BOS - BLANK OFF SECTIONS

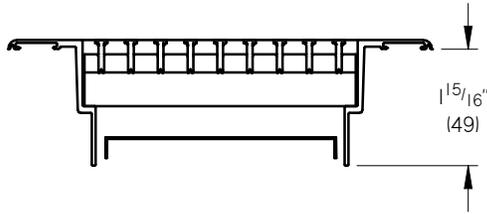


INACTIVE SECTION C/W BLANK OFF STRIPS

DV1 - DIRECTIONAL VANES

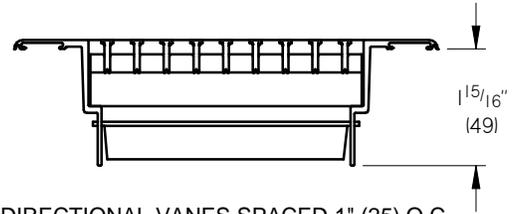


DIRECTIONAL VANES SPACED 1" (25) O.C.
• MIN. NOM. WIDTH 2" (51)

VCS2

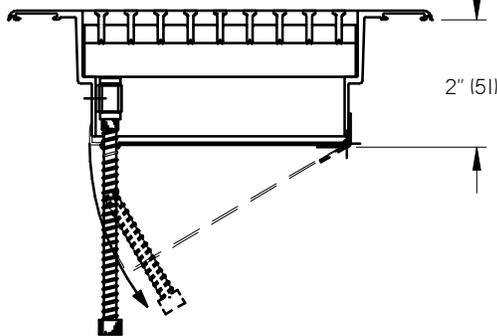


VCS2 FLAP DAMPER SCREW DRIVER OPERATOR ON GRILLES WITH NOM. WIDTHS LARGER THAN 2 1/2" (64) THROUGH TO 8" (203). FRICTION HINGE ON GRILLES WITH NOM. WIDTHS 2 1/2" (64) AND SMALLER THROUGH TO 1 1/2" (38).

VCS3

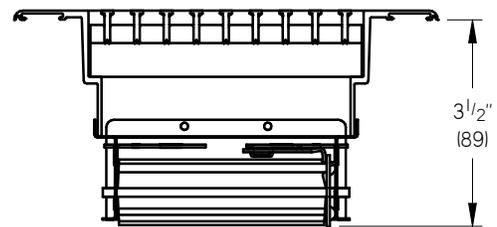

VCS3 OPPOSED BLADE DAMPER
• MIN. DAMPER WIDTH = 2 1/2" (64)
• MIN. DAMPER WIDTH = 3" (76) FOR 125, 187 BORDER STYLES

DV1 / VCS3

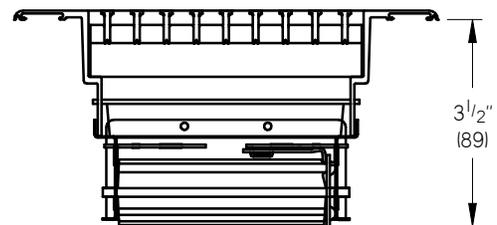

DV1 DIRECTION VANES AND VCS3 OPPOSED BLADE DAMPER
• MIN. DAMPER WIDTH = 2 1/2" (64)
• MIN. DAMPER WIDTH = 3" (76) FOR 125, 187 BORDER STYLES

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE
ENGINEER:		
CUSTOMER:		<i>PS</i>
SUBMITTAL DATE:		263828
SPEC. SYMBOL:		2024/07/26
		LFG LINEAR FLOOR GRILLE PRESSED CORE