

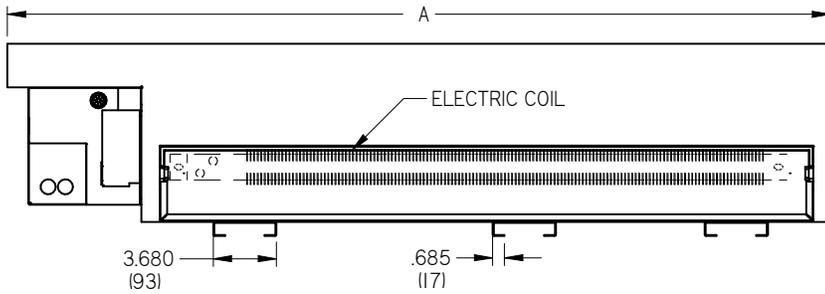


LNT ELECTRIC

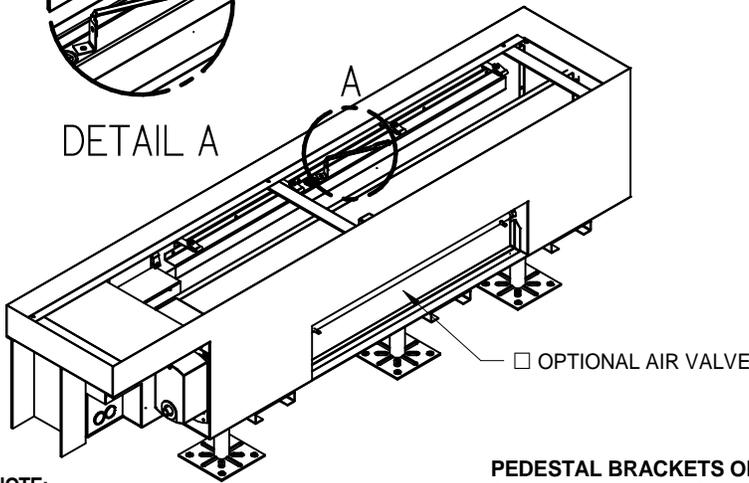


ROUGH OPENING NOM L X W	LENGTH A	AIR VALVE SIZE (CFM)	MIN. EC (W)	MAX. EC (W)
<input type="checkbox"/> 48 X 10 (1219 X 254)	47 7/8 (1216)	<input type="checkbox"/> 200 <input type="checkbox"/> 300 <input type="checkbox"/> 400	750	1000
<input type="checkbox"/> 72 X 10 (1829 X 254)	71 7/8 (1826)	<input type="checkbox"/> 200 <input type="checkbox"/> 300 <input type="checkbox"/> 400	1000	1500
<input type="checkbox"/> 96 X 10 (2438 X 254)	95 7/8 (2435)	<input type="checkbox"/> 400 <input type="checkbox"/> 600 <input type="checkbox"/> 800	1500	2000

NOMINAL LENGTH	120-1V			208-1V			240-1V			277-1V		
	AMPS	MCA	MOP	AMPS	MCA	MOP	AMPS	MCA	MOP	AMPS	MCA	MOP
48	6.3 - 8.3	7.8 - 10.4	15	3.6 - 4.8	4.5 - 6.0	15	3.1 - 4.2	3.9 - 5.2	15	2.7 - 3.6	3.4 - 4.5	15
72	8.3 - 12.5	10.4 - 15.6	15 - 20	4.8 - 7.2	6.0 - 9.0	15	4.2 - 6.3	5.2 - 7.8	15	3.6 - 5.4	4.5 - 6.8	15
96	12.5 - 16.7	15.6 - 20.8	20 - 25	7.2 - 9.6	9.0 - 12.0	15	6.3 - 8.3	7.8 - 10.4	15	5.4 - 7.2	6.8 - 9.0	15

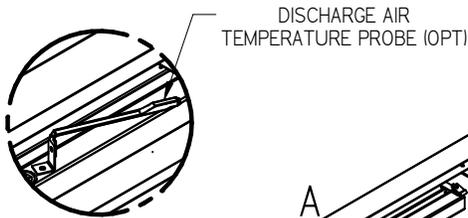

**NOTE: LFG MUST BE ORDERED SEPARATELY
NOMINAL GRILLE SIZE = L-0.125"(3) X 9.875"(251)**

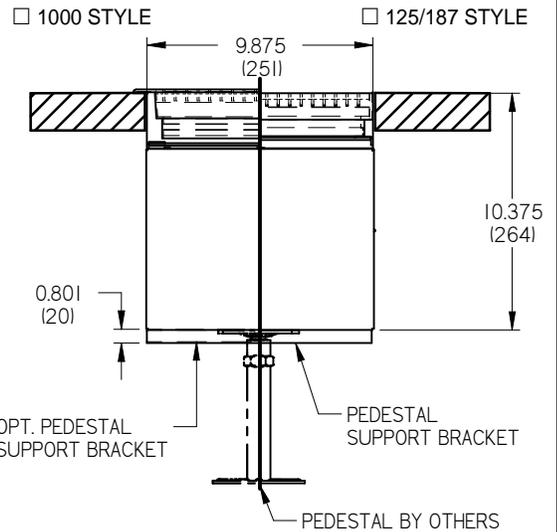

NOTE:

- LNT WITH LFG INSTALLED IS DESIGNED TO WITHSTAND LIGHT FOOT TRAFFIC
- PEDESTAL BRACKETS SUPPLIED & MOUNTED BY PRICE
- PEDESTAL & PEDESTAL HEAD SUPPLIED BY OTHERS

PLENUM:

- 20 GAUGE STEEL CONSTRUCTION
- BLACK FINISH
- DROP-IN INSTALLATION FROM ABOVE FLOOR
- COMES WITH REMOVABLE ENDCAPS FOR CONTINUOUS & DISCRETE GRILLE INSTALLATIONS

DAMPER CONTROL:

- 24 VAC FLOATING POINT ACTUATOR
- RJ45 CONTROL BOARD WITH PLENUM RATED CONTROL CABLE

PEDESTAL BRACKETS OPTION (REQUIRED FOR PDS):

- PEDESTAL BRACKETS
 - 3 FOR 48X10 UNITS
 - 4 FOR 72X10 UNITS
 - 5 FOR 96X10 UNITS

ACOUSTIC LINER:

- 1/2" INTERNAL FIBER FREE LINER (3LB DENSITY MIN.)

CFLEX CONTROL CABLE (PURPLE):

- 15P - 15 FT. STRANDED
- 25P - 25 FT. STRANDED
- 35P - 35 FT. STRANDED

COIL TYPE:

- STG - SINGLE STAGE HEAT (ON-OFF)
- SCR - SILICON CONTROLLED RECTIFIER (0-10VDC)

SCR DAT CONTROL:

- DAT - DISCHARGE AIR TEMP PROBE

HEATER ELEMENT:

- 120/1/60 ELECTRICAL
- 208/1/60 ELECTRICAL
- 240/1/60 ELECTRICAL
- 277/1/60 ELECTRICAL
- FINNED STRIP HEATER, MULTIPLE ELEMENTS MAY BE SUPPLIED ON LONGER UNITS
- TRANSFORMERS & DISCONNECT SWITCH INCLUDED IN ASSEMBLY

HIGH VOLT CABLE OPTIONS:
REFERENCE PAGE 2






Intertek


ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		 LNT LNT ELECTRIC
ENGINEER:		
CUSTOMER:		
SUBMITTAL DATE:		
SPEC. SYMBOL:		271164 2024/11/26


LNT ELECTRIC
HIGH VOLTAGE CABLE OPTIONS

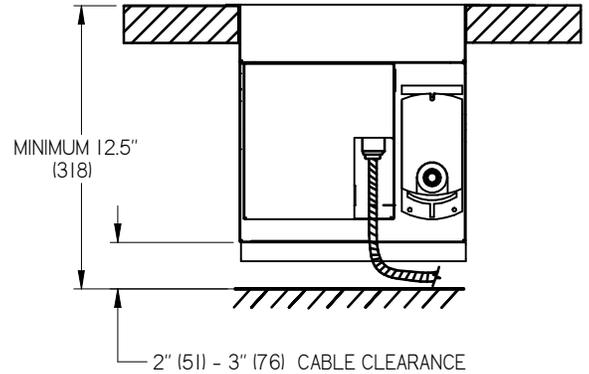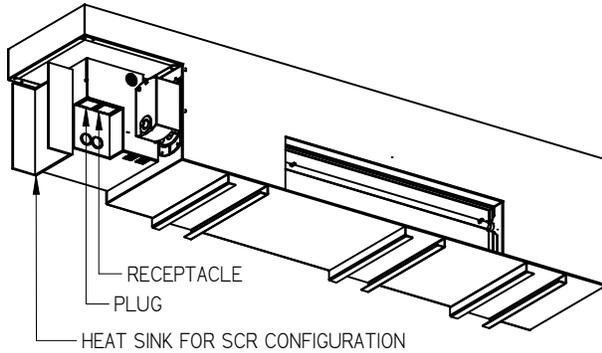


STARTER CABLE

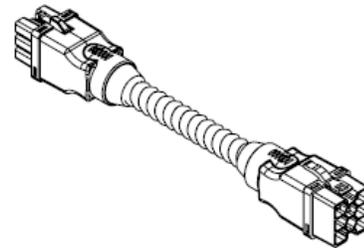

EXTENDER CABLE



RECEPTACLE



PLUG

NOTE:

- 2" - 3" (51 - 76) CABLE CLEARANCE REQUIRED BELOW THE BOTTOM OF THE PLENUM
- EACH PLENUM COMES WITH ONE RECEPTACLE AND ONE PLUG

SUPPLY POWER:

- 115/24 VAC
- 277/24 VAC

HVC - HIGH VOLTAGE MODULAR CABLES (OPTIONAL):

- STARTER CABLE, 20FT EXTENDER CABLE, 20FT
- STARTER CABLE, 40FT EXTENDER CABLE, 40FT
- STARTER CABLE, 60FT EXTENDER CABLE, 60FT

NOTE: HVC MUST BE ORDERED SEPARATELY



Intertek

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE
ENGINEER:		
CUSTOMER:		<i>PS</i>
SUBMITTAL DATE:		271164
SPEC. SYMBOL:		2024/11/26
		LNT LNT ELECTRIC