



540/540S Supply Grilles and Registers  
with Multi Louver Damper

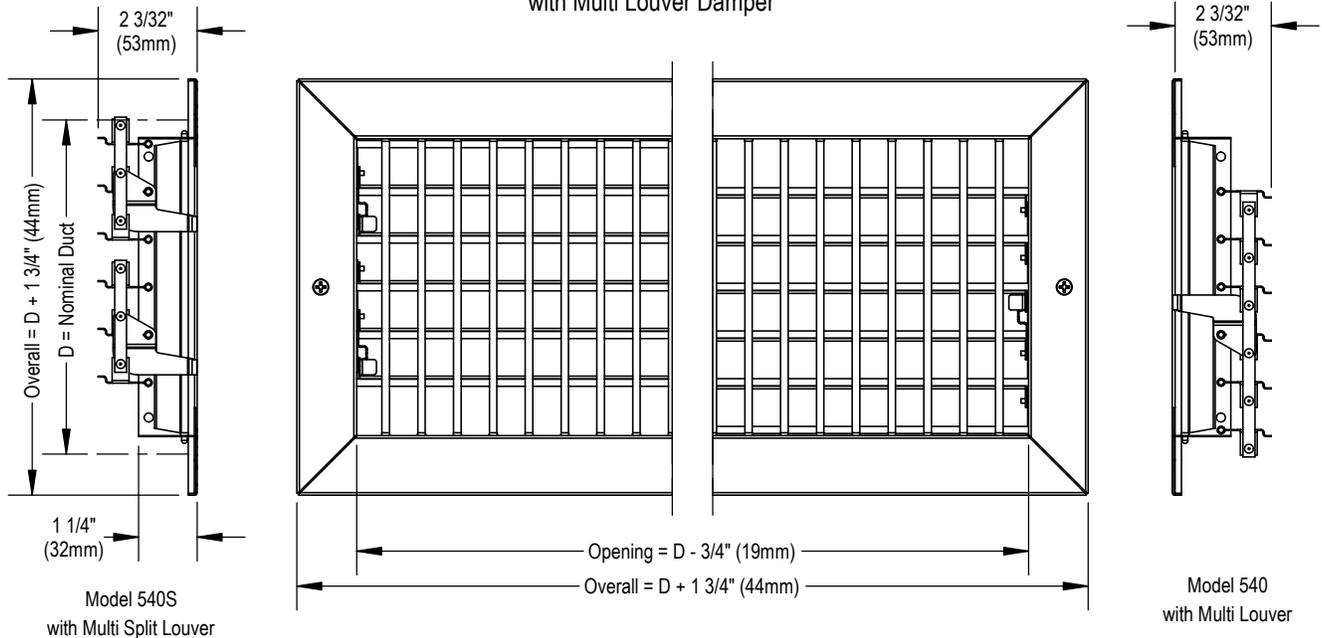


**BORDER:**

F - 1 1/4" Flat Frame

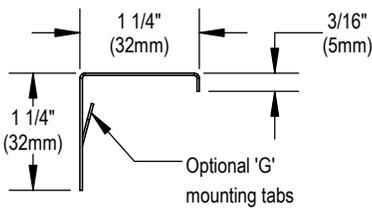


**FASTENING:**

A - Countersunk Screws Holes  
c/w screws



G - Lance through frame stack  
for #8 screws



Scan for link to additional product information and installation instructions

**MATERIAL:**

- Steel construction

**FINISH:**

Standard Finish

- B12 - Standard White

Optional finishes available:

- Optional colors
- Custom colors

See finishes brochure for additional information.

Contact your PRICE representative for leadtimes and pricing

**FASTENING:**

- Standard type 'A' fastening countersunk screw holes for #8 screws located per factory standard (screws supplied)
- Optional type 'G' fastening - lanced holes through frame stack for #8 screws per factory standard (screws supplied)

**LOUVER STYLE:**

- 540 - integral shutter style damper with one operator
- 540S - integral shutter style damper, split operators (2 operators)


**NOTES:**

- Available sizes: (One piece construction)  
Min. - 6" x 4" (152mm x 102mm) for model 540  
Min. - 6" x 5" (152mm x 127mm) for model 540S  
Max. - 24" x 14" (610mm x 356mm)
- Blade orientation:  
Front directional blade = Parallel to short dimension  
Shutter type damper blades = Parallel to long dimension
- Blade spacing = 3/4" (19mm)
- Factory tolerance: ±1/32" (1mm)


ALL METRIC DIMENSIONS ( ) ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER

<b>PROJECT:</b>		<b>PRICE</b>	
<b>ENGINEER:</b>		<i>MJ</i>	<b>540/540S</b> Steel Supply Grilles and Registers w/ Multi Louver Damper
<b>CUSTOMER:</b>			
<b>SUBMITTAL DATE:</b>	<b>SPEC. SYMBOL:</b>	APR. 2025	

640/640S Supply Grilles and Registers  
with Multi Louver Damper

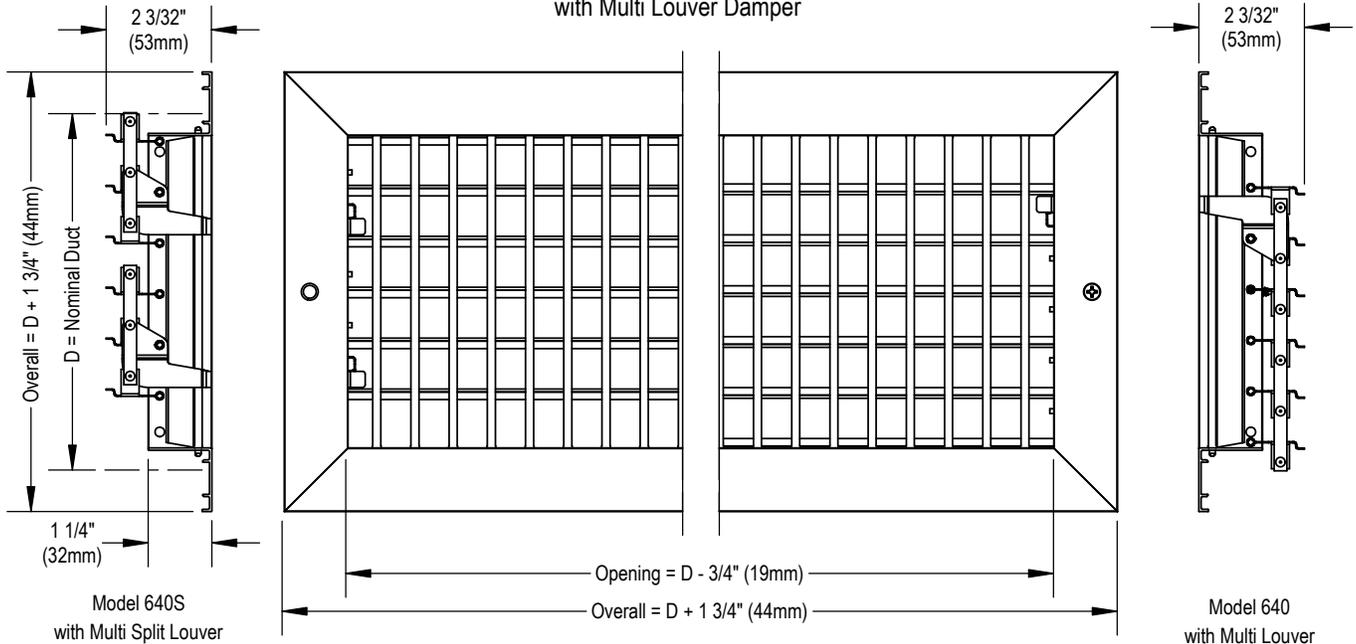


**BORDER:**

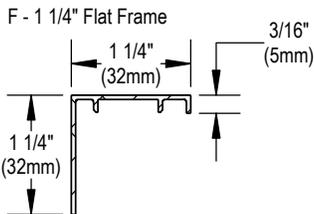


**FASTENING:**

A - Countersunk screw holes  
c/w screws



G - Lance through frame stack  
for #8 screws



Scan for link to additional  
product information and  
installation instructions

**MATERIAL:**

- Aluminum construction

**FINISH:**

Standard finish

- B12 - Standard White

Optional finishes available:

- Optional colors
- Custom colors

See finishes brochure for additional information.

Contact your PRICE representative for leadtimes and pricing

**FASTENING:**

- Standard type 'A' fastening countersunk screw holes for #8 screws located per factory standard (screws supplied)
- Optional type 'G' fastening - Lanced holes through frame stack for #8 screws per factory standard (screws supplied)

**LOUVER STYLE:**

- 640 - integral shutter style damper with one operator
- 640S - integral shutter style damper, split operators (2 operators)

**NOTES:**

- Available sizes: (One piece construction)
  - Min. - 6" x 4" (152mm x 102mm) for model 640
  - Min. - 6" x 5" (152mm x 127mm) for model 640S
  - Max. - 18" x 14" (457mm x 356mm)
- Oversized unit available in sizes:
  - 20" x 4" (508mm x 102mm)    20" x 6" (508mm x 152mm)    22" x 6" (559mm x 152mm)
  - 24" x 6" (610mm x 152mm)    24" x 8" (610mm x 203mm)    24" x 10" (610mm x 254mm)
  - 24" x 12" (610mm x 305mm)
- Blade orientation:
  - Front directional blade = Parallel to short dimension
  - Shutter type damper blades = Parallel to long dimension
- Blade spacing = 3/4" (19mm)
- Factory tolerance: ± 1/32" (1mm)

ALL METRIC DIMENSIONS ( ) ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER

<b>PROJECT:</b>		<b>PRICE</b> <sup>®</sup>
<b>ENGINEER:</b>		
<b>CUSTOMER:</b>		<b>245550</b>
<b>SUBMITTAL DATE:</b>	<b>SPEC. SYMBOL:</b>	<b>2023-03-15</b>

**640/640S**  
Steel Supply  
Grilles & Registers  
w/ Multi Louver Damper