



600 - Aluminum Louvered Face Supply Grille

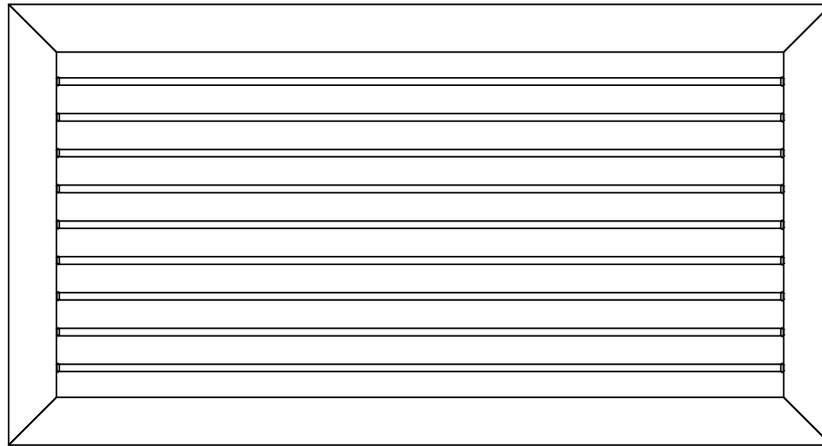


SUPPLY

□ 610

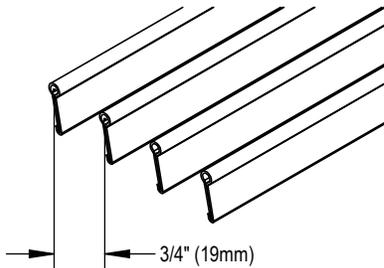

Adjustable Single Deflection


□ 620

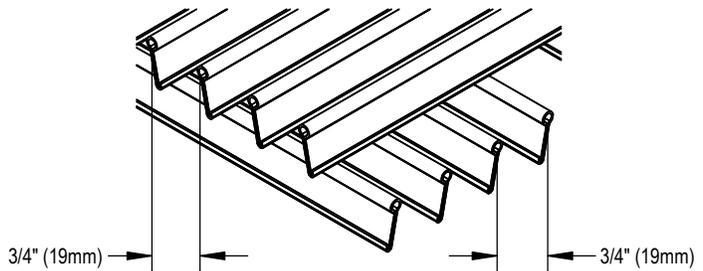

Adjustable Double Deflection


BLADE ORIENTATION:

□ L



Front blades parallel to long dimension

□ S



Front blades parallel to short dimension

MATERIAL:

- Grille: Aluminum construction
- Panel: Steel construction (3P, 916P, 17P and 15P)
Aluminum construction (3PA, 916PA, 17PA and 15PA)

NOTES:

- For supply grilles, visible mullions are included when blades are parallel to nominal size dimension larger than 24" (610mm)


ALL METRIC DIMENSIONS [] ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE [®]	
ENGINEER:		APPROVED BY: 	600 Series Aluminum Louvered Face Supply Grille
CUSTOMER:		DRAWING NO: 209915	
SUBMITTAL DATE:	SPEC. SYMBOL:	DATE DRAWN: 3/4/2025	


600 - Aluminum Louvered Face Supply Grille

LAY-IN FRAMES:


□ F - 1 1/4" (32mm) Flat Frame for 15/16" T-Bar Lay-In

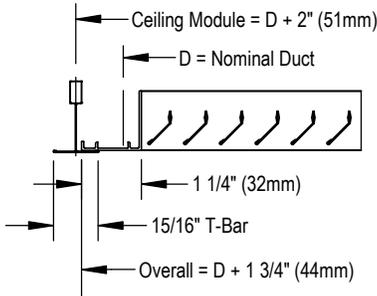


□ NF - 3/4" (19mm) Flat Frame for 15/16" T-Bar Lay-In

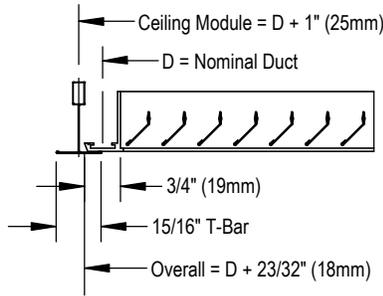


□ 3P - Steel Panel for 15/16" T-Bar Lay-In
□ 3PA - Aluminum Panel for 15/16" T-Bar Lay-In

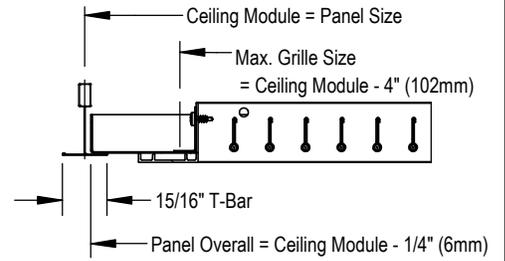


□ 17P - Steel Panel for 9/16" Bolt Slot or Tegular T-Bar
□ 17PA - Aluminum Panel for 9/16" Bolt Slot or Tegular T-Bar

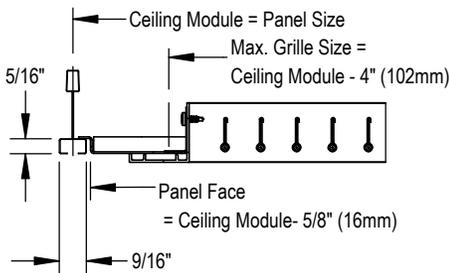

□ 916P - Steel Panel for 9/16" Flat T-Bar
□ 916PA - Aluminum Panel for 9/16" Flat T-Bar

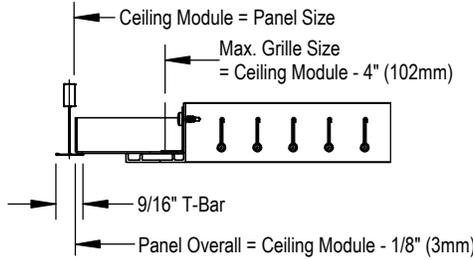


□ 15P - Steel Panel for 15/16" Tegular T-Bar
□ 15PA - Aluminum Panel for 15/16" Tegular T-Bar

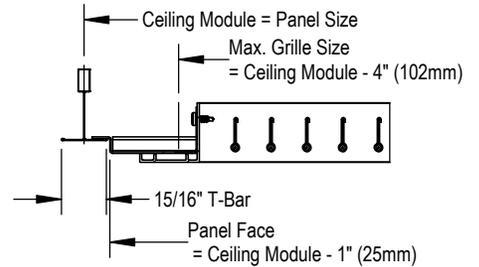


SURFACE MOUNT FRAMES:


□ F - 1 1/4" (32mm) Flat Frame

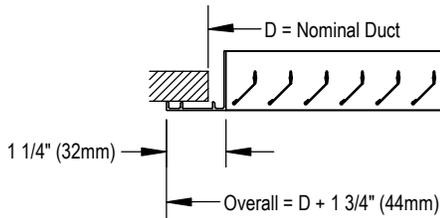

□ D - 3/8" (10mm) Flat Mounting Frame with 1 1/4" (32mm) Frame

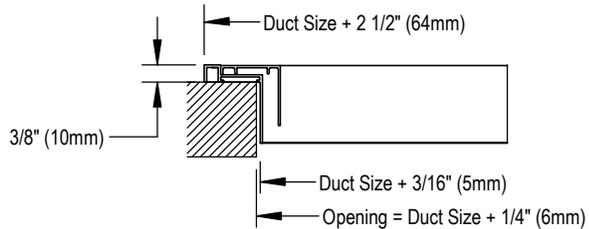

□ N - 1" (25mm) Narrow Frame

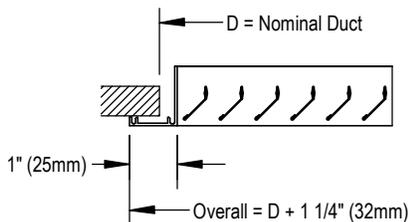

AVAILABLE SIZES:



- Minimum size: 6" x 4" (152mm x 102mm)
- Maximum size one piece construction: 48" x 48" (1219mm x 1219mm)
- 3P, 3PA, 17P, 17PA, 916P, 916PA, 15P and 15PA Panels:
 - 12" x 12" (305mm x 305mm) Ceiling Module
 - 24" x 12" (610mm x 305mm) Ceiling Module
 - 24" x 24" (610mm x 610mm) Ceiling Module
 - 48" x 24" (1219mm x 610mm) Ceiling Module
- F and N frames available for surface mount applications in multiple sections with mullions and / or duct mounting channels - see page 5 for details

ALL METRIC DIMENSIONS [] ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE
ENGINEER:		
CUSTOMER:		600 Series Aluminum Louvered Face Supply Grille
SUBMITTAL DATE:	SPEC. SYMBOL:	APPROVED BY:
		DRAWING NO: 269915
		DATE DRAWN: 3/4/2025

600 - Aluminum Louvered Face Supply Grille

SPIRAL DUCT FRAME:

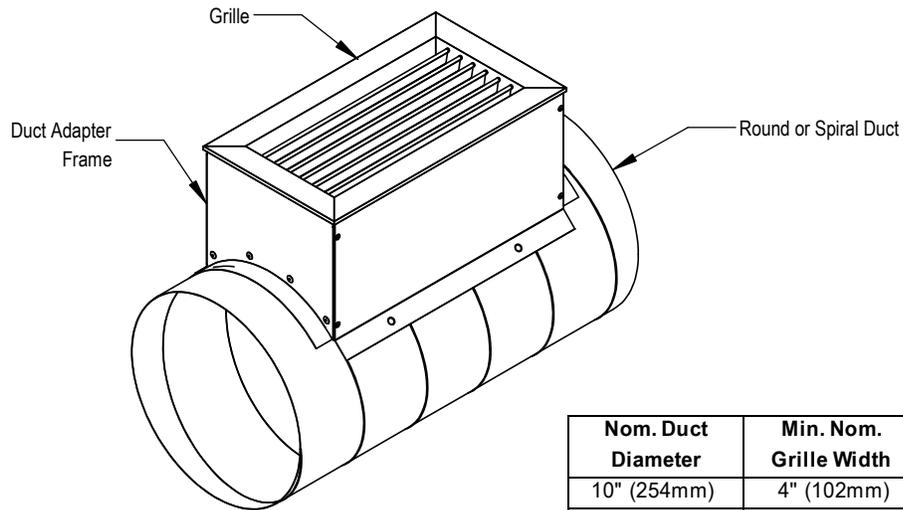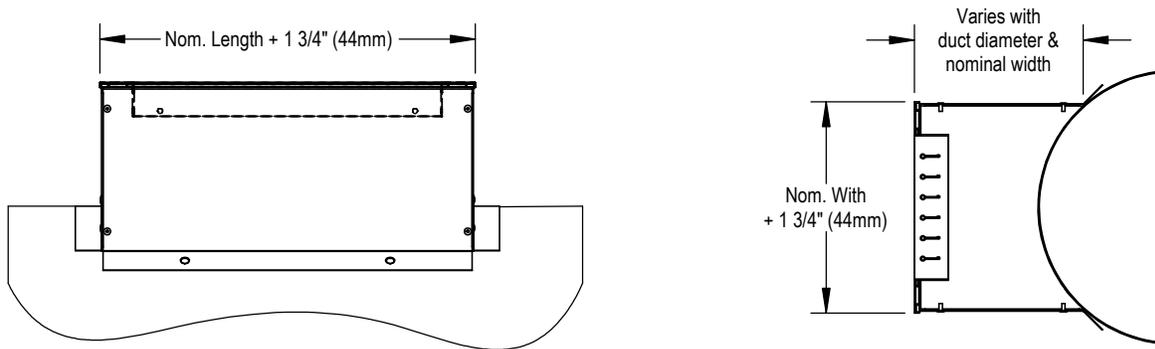

MATERIAL:

- Adapter Frame: Galvanized steel

FINISH:

- Adapter Frame: Mill finish

NOTES:

- Intended for use in spiral or round duct applications
- Available sizes:
Min.: 6" x 4" (152mm x 102mm)
Max.: 36" x 16" (914mm x 406mm)
- Available in 1" (25mm) increments
- Open cell foam insulation provides a tight seal around the grille opening in any round duct
- Fits 600 series grilles with "F" frame
- Grille comes fastened to spiral duct frame with 'A' countersunk screw mounting

Nom. Duct Diameter	Min. Nom. Grille Width	Min. Nom. Grille Length
10" (254mm)	4" (102mm)	8" (203mm)
12" (305mm)	4" (102mm)	9" (229mm)
14" (356mm)	4" (102mm)	11" (279mm)
16" (406mm)	4" (102mm)	12" (305mm)
18" (457mm)	4" (102mm)	13" (330mm)
20" (508mm)	4" (102mm)	14" (356mm)
22" (559mm)	4" (102mm)	15" (381mm)
24" (610mm)	4" (102mm)	16" (406mm)
26" (660mm)	4" (102mm)	16" (406mm)
28" (711mm)	4" (102mm)	16" (406mm)
30" (762mm)	4" (102mm)	16" (406mm)
32" (813mm)	4" (102mm)	16" (406mm)
34" (864mm)	4" (102mm)	16" (406mm)
36" (914mm)	4" (102mm)	16" (406mm)
38" (965mm)	4" (102mm)	16" (406mm)
40" (1016mm)	4" (102mm)	16" (406mm)
42" (1067mm)	12" (305mm)	16" (406mm)
48" (1219mm)	12" (305mm)	16" (406mm)

ALL METRIC DIMENSIONS [] ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE [®]	APPROVED BY: <i>[Signature]</i>		
ENGINEER:			600 Series Aluminum Louvered Face Supply Grille		
CUSTOMER:		DRAWING NO: 289915			
SUBMITTAL DATE:		DATE DRAWN: 3/4/2025			
SPEC. SYMBOL:					

600 - Aluminum Louvered Face Supply Grille

FASTENING:





A - Countersunk Screw

AD2 - 2" (51mm) Drillpoint Screw

C - Concealed Mounting Bracket

0 - No Screwholes

For lay-in applications or fastening by others

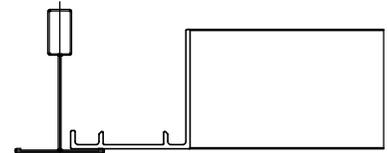


Available on frames "F" and "N"

Max. Size = 24" x 24" (610mm x 610mm)

SR - Round Neck Adaptor


Coated steel construction - Mill finish

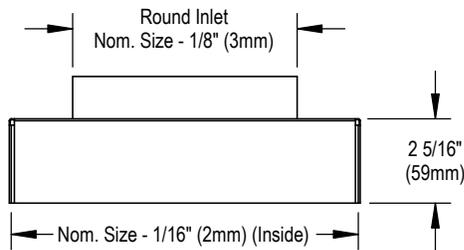

DAMPERS

VCS3 - Coated Steel Opposed Blade Damper

VCS3AL - Aluminum Opposed Blade Damper - Mill finish



	H
610	1 1/4" (32mm)
620	2" (51mm)

IS - Insect Screen 18/16 Mesh

Not available with Opposed Blade Damper or SR
Maximum size 48" x 48" (1219mm x 1219mm)

NOTES:

- Type A and AD2 fastening - Countersunk screw holes for #8 screws located per factory standard (screws supplied)
- Grilles are ordered by nominal duct size, for module size details in lay-in applications see page 2
- Only one of options IS or SR may be selected and are not available with 'C' mounting
- C mounting - steel construction
- Factory tolerance $\pm 1/32"$ (1mm)

FINISH:

Standard Finish:

- B12 - Standard White
- Optional Finishes Available:

- Optional colors
- Custom colors
- ARMSTRONG coordinated finishes

See finishes brochure for additional information.

Contact your PRICE representative for leadtimes and pricing




Scan for link to additional product information and installation instructions

ALL METRIC DIMENSIONS [] ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.


PROJECT:		PRICE [®]	
ENGINEER:		APPROVED BY: 	600 Series Aluminum Louvered Face Supply Grille
CUSTOMER:		DRAWING NO: 269915	
SUBMITTAL DATE:	SPEC. SYMBOL:	DATE DRAWN: 3/4/2025	

600 - Aluminum Louvered Face Supply Grille


Multi-Section Construction - Surface Mount, Sizes over 48" x 48" (1219mm x 1219mm)

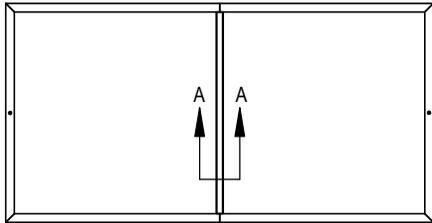


One dimension over 48" (1219mm)
 Sizes up to 96" x 48" (2438mm x 1219mm)
 Two Sections with Mullion

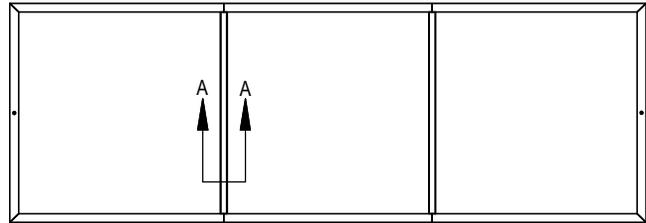



One dimension over 48" (1219mm)
 Sizes up to 144" x 48" (3658mm x 1219mm)
 Three Sections with Mullions

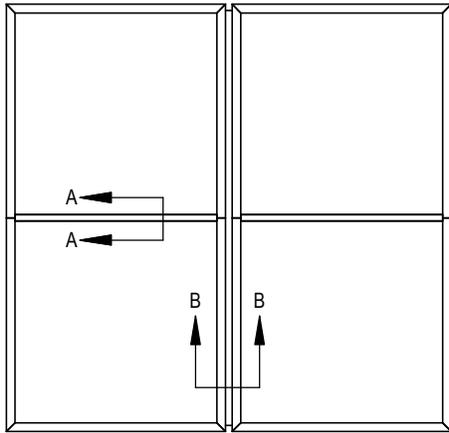

Both dimensions over 48" (1219mm)
 Up to 96" x 96" (2438mm x 2438mm)
 Mullions and Mounting Channel

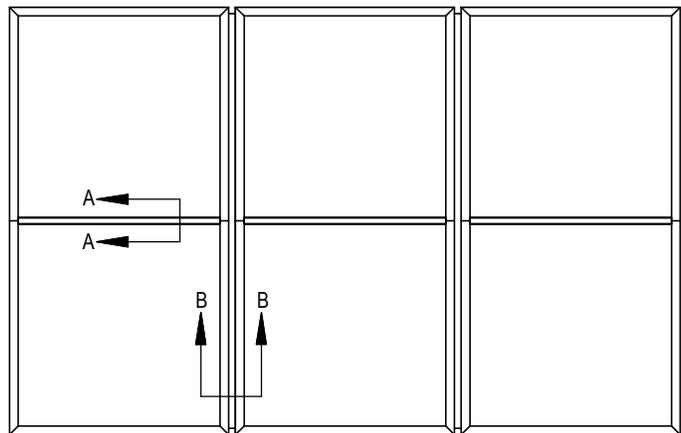

Both dimensions over 48" (1219mm)
 Up to 144" x 96" (3658mm x 2438mm)
 Mullions and Two Mounting Channels

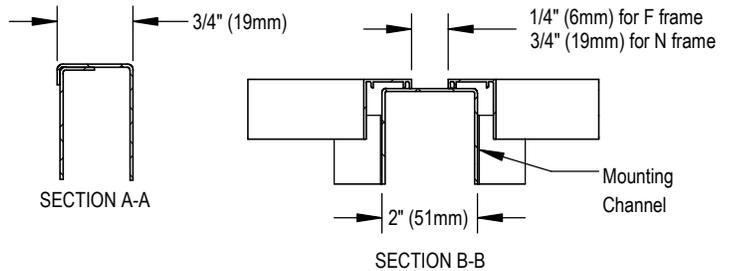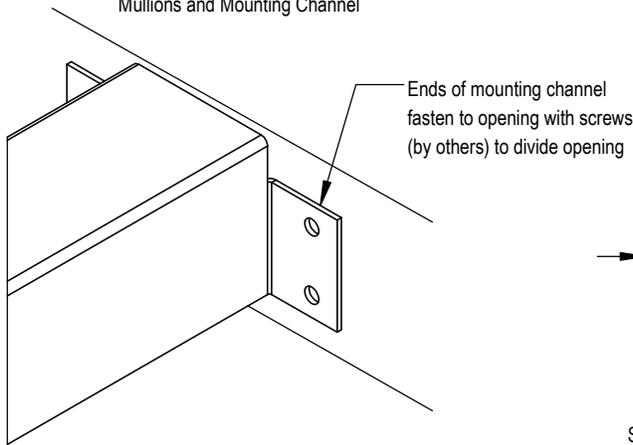

NOTES:

- Sections ship loose for field installation
- Duct mounting channels provided in aluminum (Other materials available as special order)

ALL METRIC DIMENSIONS [] ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE [®]	
ENGINEER:		APPROVED BY: <i>MG</i>	600 Series Aluminum Louvered Face Supply Grille
CUSTOMER:		DRAWING NO: 269915	
SUBMITTAL DATE:	SPEC. SYMBOL:	DATE DRAWN: 3/4/2025	