


UNIT SIZE	INLET SIZES	WIDTH	HEIGHT
	D	W	H
4	3 7/8 (98)	12 (305)	8 (203)
5	4 7/8 (124)		
6	5 7/8 (149)		
7	6 7/8 (175)		
8	7 7/8 (200)	14 (356)	10 (254)
9	8 7/8 (225)		
10	9 7/8 (251)	20 (508)	12 1/2 (318)
12	11 7/8 (302)		
14	13 7/8 (352)	24 (610)	18 (457)
16	15 7/8 (403)	38 (965)	
24 x 16	23 7/8 (603) x 15 7/8 (403)		

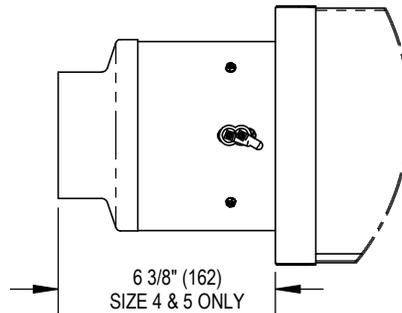

STANDARD CONSTRUCTION:

- 1" (25mm) THICK INTERNAL FIBERGLASS INSULATION WHICH MEETS REQUIREMENTS OF NFPA 90A AND UL181.
- 22 GAUGE GALVANIZED STEEL HOUSING. MECHANICALLY SEALED, LEAK RESISTANT CONSTRUCTION.
- RECTANGULAR DISCHARGE OPENING WITH SLIP AND DRIVE CLEAT DUCT CONNECTION.
- MULTI-POINT, CENTER AVERAGING AIRFLOW SENSOR.
- 1/2" (13mm) GALVANIZED DAMPER SHAFT WITH POSITION INDICATOR.
- RIGHT HAND UNIT SHOWN (CRH), LEFT HAND AVAILABLE.
- SILENCER - MEDIUM PRESSURE STYLE, 22 GAUGE GALVANIZED CASING WITH PERFORATED LINER OVER FIBERGLASS ACOUSTIC MEDIA.

CONTROLS OPTIONS:

- FIELD MOUNTED CONTROLS, SUPPLIED BY OTHERS (FLD)
- FACTORY MOUNTED DIGITAL CONTROLS, SUPPLIED BY OTHERS (FAC)
- FACTORY MOUNTED DIGITAL CONTROLS, SUPPLIED BY PRICE (EHPD)
- FACTORY MOUNTED PNEUMATIC CONTROLS, SUPPLIED BY PRICE (EHPP)

SILENCER LINER OPTIONS:

- POLYMER LINER (PL)
- FIBERGLASS CLOTH (FC)

UNIT OPTIONS:

- NEMA1 CONTROLS ENCLOSURE (PS)
- DISCONNECT SWITCH (DSW)
- HANGER BRACKETS (HB)
- BOTTOM REMOVABLE SENSOR (RS)
- BRASS AIRFLOW SENSOR GAUGE TAPS (GT)

BOTTOM ACCESS DOOR OPTIONS:

- ACCESS DOOR WITH SCREWS (AD)
- ACCESS DOOR WITH QUARTER TURN LATCHES (ADQ)

LINER OPTIONS:

- FIBER FREE FOAM 1" (25mm) (FF1)
- SOLID METAL WITH FG1 (SM1)
- CLEANROOM ANGLES WITH FB1 (CRAF1)
- PERFORATED METAL WITH FB1 (AFPM1)
- NO LINER (NL)
- CLEANROOM ANGLES (CA) WITH FG1 OR FF1



ALL METRIC DIMENSIONS [] ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE [®]	
ENGINEER:			
CUSTOMER:		DRAWING NO: 276365	SDVQ SINGLE DUCT TERMINAL VARIABLE VOLUME STRAIGHT SILENCER
SUBMITTAL DATE:		DATE DRAWN: 2024-01-16	
SPEC. SYMBOL:			