

### Superior Air Performance

#### Standard Construction

##### Frame

6"(152) Formed 12 GA Aluminum

##### Blades

Formed 12 GA Aluminum at a 45° angle, 6"(152) blade spacing

##### Finishes

MILL

##### Minimum Size

18" W x 10 13/16" H (457 x 275)

##### Maximum Size



72" W x 120" H (1829 x 3048)

#### Available Options

- Extended Sill (loose) 14 GA. Aluminum
- Blank-off Panels: Aluminum or Galvanized, Insulated or Non-Insulated
- Formed Flange and Mounting Angle up to 4"
- Birdscreen: Aluminum or Galvanized
- Insect Screen: Aluminum or Bronze
- Finishes: Prime Coat, Baked Enamel, Duranar , Duranar XL
- Anodized Finishes: Clear or Colour (Light Bronze, Medium Bronze, Dark Bronze, Black)

#### Free-Field Noise Reduction in Decibels

Selected 1/3 Octave Bands Center Frequency Hz							
63	125	250	500	1000	2000	4000	8000
13	8	10	13	21	25	22	23

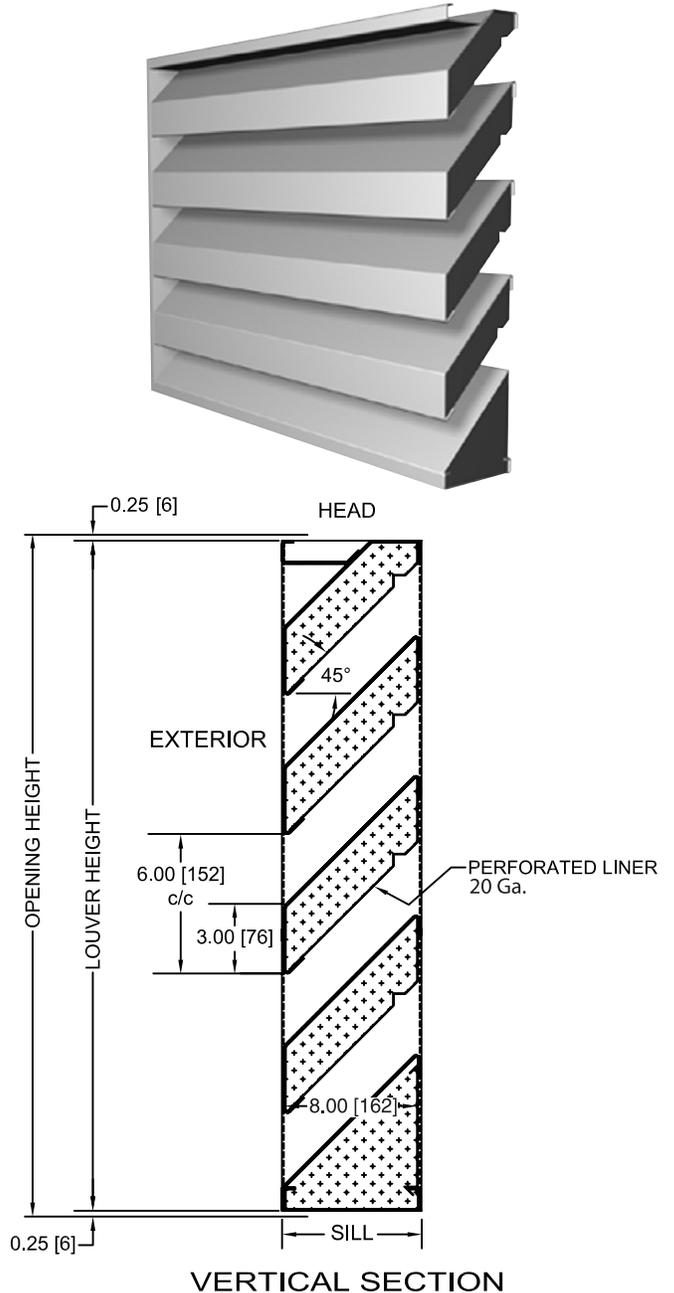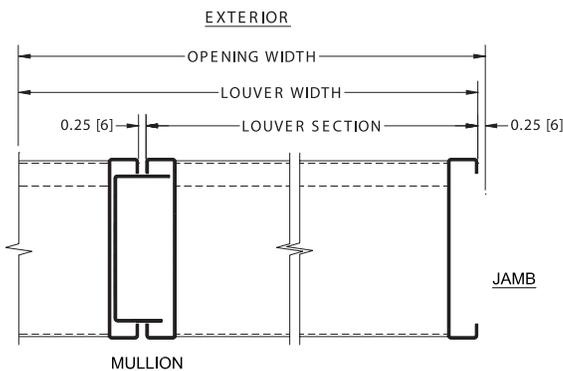

ALL-WELDED CONSTRUCTION



<b>PROJECT</b>				<b>CUSTOMER</b>			
<b>ARCHITECT</b>				<b>ENGINEER</b>			
<b>SPEC. SYMBOL</b>				<b>DATE</b>			
QTY	TAG	LOUVER SIZE		OPENING SIZE		OPTIONS	UNITS: <input type="checkbox"/> IMPERIAL <input type="checkbox"/> METRIC
		WIDTH	HEIGHT	WIDTH	HEIGHT		