

**IMPERIAL UNITS (INCHES)**

UNIT SIZE	INLET SIZE, A	RETURN AIR INLET		OUTLET		L	W	H	J
		B	C	D	E				
10	4, 5, 6, 8, 10	8	10	9 1/4	8	36	20	15 1/4	6 1/8
20	6, 8, 10, 12	13 1/2	15	13 1/4	11 1/3	41	26	18 1/2	6
30	8, 10, 12, 14, 16	13 1/2	15	13 1/4	11 1/3	41	26	18 1/2	6
40	10, 12, 14, 16	13 1/2	15	13 1/4	11 1/3	41	26	18 1/2	6
50	12, 14, 16	15	16	14 1/2	13 5/8	44	30	20 1/8	5 3/8

UNIT SIZE	MOTOR H.P.	FULL LOAD AMPS			
		115V	208V	240V	277V
10	1/3	4.6	2.9	2.6	2.4
20	1/3	4.6	2.9	2.6	2.4
30	1/2	7.1	4.5	4.0	3.8
40	3/4	10.3	7.2	6.4	6.0
50	1	12.0	9.6	8.5	6.4

**SI UNITS (mm)**

UNIT SIZE	INLET SIZE, A	RETURN AIR INLET		OUTLET		L	W	H	J
		B	C	D	E				
10	102, 127, 152, 203, 254	203	254	235	203	914	508	387	156
20	152, 203, 254, 305	343	381	337	288	1041	660	470	152
30	203, 254, 305, 356, 406	343	381	337	288	1041	660	470	152
40	254, 305, 356, 406	343	381	337	288	1041	660	470	152
50	305, 356, 406	381	406	368	346	1118	762	511	137

STANDARD MOTOR (PSC)					
UNIT SIZE	MOTOR H.P.	FULL LOAD AMPS			
		115V	208V	240V	277V
10	1/8	2.7	-	-	1.0
20	1/4	-	2.6	2.5	2.6
30	1/2	-	-	-	3.2
40	3/4	-	-	-	4.0
50	1	-	6.5	5.9	5.2

FLA AT 0.2" w.g. (50Pa) EXTERNAL STATIC PRESSURE AND MAX. FLOW.

**NOTES:**

- INTERNAL INSULATION - FIBERGLASS 1" (25mm) THICK, MIN. 1.5 LB/CU.FT DENSITY WHICH MEETS THE REQUIREMENTS OF NFPA 90A AND UL181.
- ZINC COATED 20 GAUGE STEEL HOUSING.
- MINIMUM 0.1" w.g. (25 PA) EXTERNAL STATIC PRESSURE TO OPERATE.
- ELECTRIC MOTOR 1 PHASE, 60 CYCLE.
- LISTED UL1995 & CSA236 ASSEMBLY.
- CONTROLS MOUNTED AS STANDARD ON LH SIDE AS SHOWN ABOVE.
- THE OUTLET IS NOT VERTICALLY CENTERED ON THE DISCHARGE PANEL.
  - WHEN THE BOX IS SUPPLIED WITH RIGHT-HANDED CONTROLS, DIMENSION 'J' MEASURES FROM THE BOTTOM OF THE BOX INSTEAD OF THE TOP, AS SHOWN.
- UNITS NOT TO BE USED FOR TEMPORARY HEAT OR VENTILATION DURING CONSTRUCTION.

**OPTIONS:**

- EC MOTOR
- INLET ATTENUATOR (IAS)
- DISCHARGE ATTENUATOR (DAS)
- DISCHARGE SILENCER (SLR)
- SLIP & DRIVE DISCHARGE COLLAR (DC)
- DISCONNECT SWITCH (DSW)
- CONTROLS ENCLOSURE (PS)
- 1" MERV 3 FILTER (MERV3)
- 2" MERV 8 FILTER (MERV8)
- HANGER BRACKETS (HB), SHIPPED LOOSE
- SPRING HANGER BRACKETS (HBS)
- BRASS AIRFLOW SENSOR GAUGE TAPS (GT)
- CHICAGO BUILDING CODE (CBC)
- CAM LATCH ACCESS DOOR (CL)
- FRESH AIR INLET (FAI)


**LINERS**

- FF1
- FB1
- SM1
- PM1
- CRAF1



ALL METRIC DIMENSIONS [ ] ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

<b>PROJECT:</b>		<b>price</b>	
<b>ENGINEER:</b>			
<b>CUSTOMER:</b>		DRAWING NO: 267748	
<b>SUBMITTAL DATE:</b>	<b>SPEC. SYMBOL:</b>	DATE DRAWN: 2025-12-01	

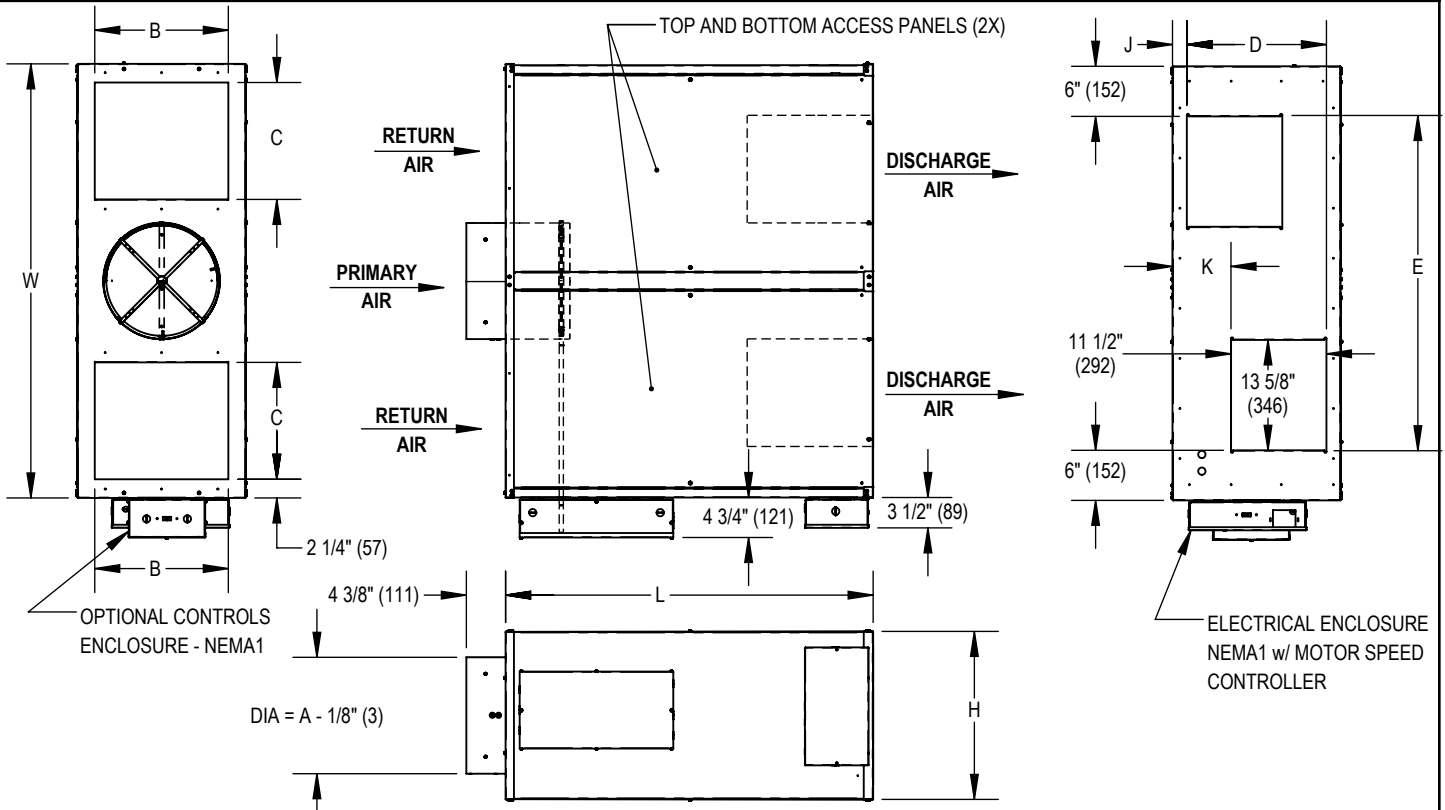

**IMPERIAL UNITS (INCHES)**

UNIT SIZE	INLET SIZE A	RETURN AIR INLET		OUTLET		L	W	H	J	K
		B	C	D	E					
60	14, 16	16	14	16 3/4	40 1/8	44	52	20 1/8	1 3/4	7

ECM MOTOR					
UNIT SIZE	MOTOR H.P.	FULL LOAD AMPS			
		115V	208V	240V	277V
60	3/4 (2)	18.6	14.3	12.6	10.2

**SI UNITS (mm)**

UNIT SIZE	INLET SIZE A	RETURN AIR INLET		OUTLET		L	W	H	J	K
		B	C	D	E					
60	356, 406	406	356	425	1019	1118	1321	511	44	178

STANDARD MOTOR (PSC)					
UNIT SIZE	MOTOR H.P.	FULL LOAD AMPS			
		115V	208V	240V	277V
60	3/4 (2)	-	-	-	9.1

FLA AT 0.2" w.g. (50Pa) EXTERNAL STATIC PRESSURE AND MAX. FLOW.

**NOTES:**

- INTERNAL INSULATION - FIBERGLASS 1" (25mm) THICK, MIN. 1.5 LB/CU.FT DENSITY WHICH MEETS THE REQUIREMENTS OF NFPA 90A AND UL181.
- ZINC COATED 20 GAUGE STEEL HOUSING.
- MINIMUM 0.1" w.g. (25 PA) EXTERNAL STATIC PRESSURE TO OPERATE.
- ELECTRIC MOTOR 1 PHASE, 60 CYCLE.
- LISTED UL1995 & CSA236 ASSEMBLY.
- CONTROLS MOUNTED AS STANDARD ON LH SIDE AS SHOWN ABOVE.
- UNITS NOT TO BE USED FOR TEMPORARY HEAT OR VENTILATION DURING CONSTRUCTION.

**OPTIONS:**

- EC MOTOR
- INLET ATTENUATOR (IAS)
- DISCHARGE ATTENUATOR (DAS)
- DISCHARGE SILENCER (SLR)
- SLIP & DRIVE DISCHARGE COLLAR (DC)
- DISCONNECT SWITCH (DSW)
- CONTROLS ENCLOSURE (PS)
- 1" MERV 3 FILTER (MERV3)
- 2" MERV 8 FILTER (MERV8)
- HANGER BRACKETS (HB), SHIPPED LOOSE
- SPRING HANGER BRACKETS (HBS)
- BRASS AIRFLOW SENSOR GAUGE TAPS (GT)
- CHICAGO BUILDING CODE (CBC)
- CAM LATCH ACCESS DOOR (CL)

**LINERS:**

- FF1
- FB1
- SM1
- PM1
- CRAF1



ALL METRIC DIMENSIONS [ ] ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

<b>PROJECT:</b>		<b>PRICE</b>	
<b>ENGINEER:</b>			
<b>CUSTOMER:</b>		DRAWING NO: 267748	<b>FDC FAN POWERED TERMINALS CONSTANT VOLUME SIZE 60</b>
<b>SUBMITTAL DATE:</b>		DATE DRAWN: 2025-12-01	
<b>SPEC. SYMBOL:</b>			