


UNIT SIZE	INLET SIZES	LENGTH
	D	L
4	3 7/8 (98)	25 1/4 (641)
5	4 7/8 (124)	
6	5 7/8 (149)	21 1/4 (540)
7	6 7/8 (175)	
8	7 7/8 (200)	
9	8 7/8 (225)	
10	9 7/8 (251)	
12	11 7/8 (302)	
14	13 7/8 (352)	
16	15 7/8 (403)	

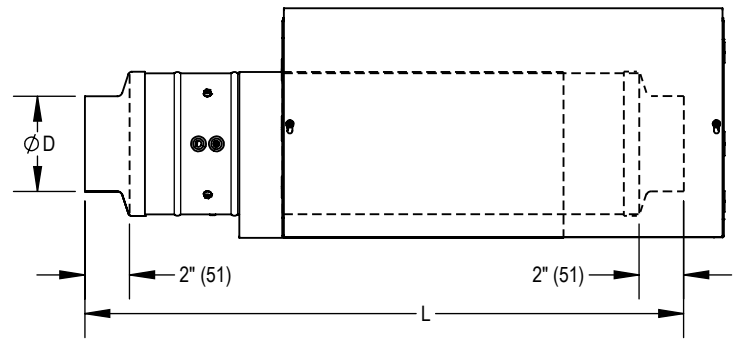

STANDARD CONSTRUCTION:

- 22 GAUGE GALVANIZED STEEL HOUSING. MECHANICALLY SEALED, LEAK RESISTANT CONSTRUCTION.
- MULTI-POINT, CENTER AVERAGING AIR FLOW SENSOR.
- 1/2" (13mm) GALVANIZED DAMPER SHAFT WITH POSITION INDICATOR.
- RIGHT HAND UNIT SHOWN (CRH), LEFT HAND AVAILABLE (CLH).

CONTROLS OPTIONS:


- FIELD MOUNTED CONTROLS, SUPPLIED BY OTHERS (FLD)
- FACTORY MOUNTED DIGITAL CONTROLS, SUPPLIED BY OTHERS (FAC)
- FACTORY MOUNTED DIGITAL CONTROLS, SUPPLIED BY PRICE (EHPP)
- FACTORY MOUNTED PNEUMATIC CONTROLS, SUPPLIED BY PRICE (EHPP)

UNIT OPTIONS:

- NEMA1 CONTROLS ENCLOSURE (PS)
- DISCONNECT SWITCH (DSW)
- REMOVABLE SENSOR (RS)
- ORIFICE RING FLOW SENSOR (ORF)
- BRASS AIRFLOW SENSOR GAUGE TAPS (GT)

ALL METRIC DIMENSIONS [] ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		price	
ENGINEER:		APPROVED BY: <i>BS</i>	RDV EXHAUST CONTROL VALVE VARIABLE VOLUME
CUSTOMER:		DRAWING NO: 276848	
SUBMITTAL DATE:		DATE DRAWN: 2025-05-22	
SPEC. SYMBOL:			

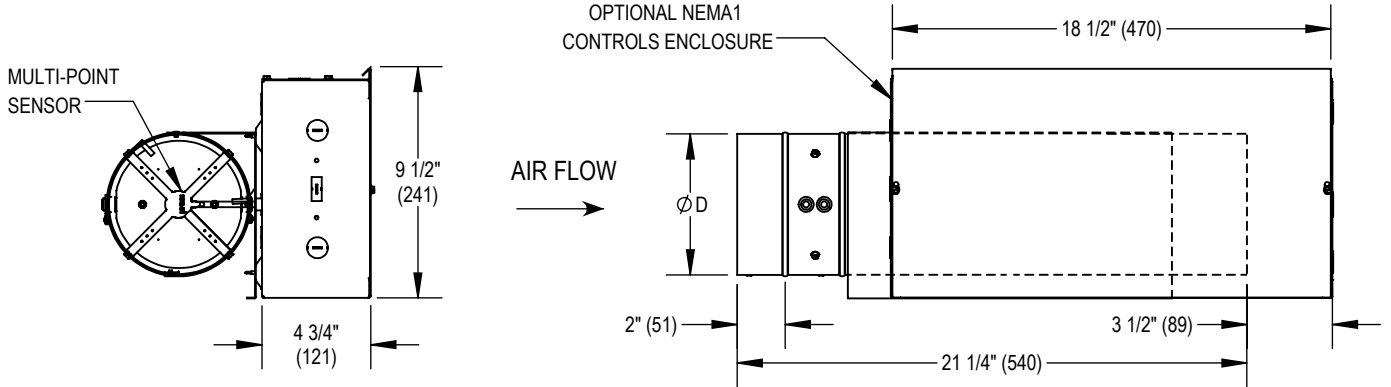

STANDARD CONSTRUCTION:

- 20 GAUGE 316 STAINLESS STEEL HOUSING. MECHANICALLY SEALED, LEAK RESISTANT CONSTRUCTION.
- STAINLESS STEEL HARDWARE.
- MULTI-POINT, CENTER AVERAGING AIRFLOW SENSOR.
- 1/2" (13mm) STAINLESS STEEL DAMPER SHAFT WITH POSITION INDICATOR.
- RIGHT HAND UNIT SHOWN (CRH), LEFT HAND AVAILABLE.

CONTROLS OPTIONS:

- FIELD MOUNTED CONTROLS, SUPPLIED BY OTHERS (FLD)
- FACTORY MOUNTED DIGITAL CONTROLS, SUPPLIED BY OTHERS (FAC)
- FACTORY MOUNTED DIGITAL CONTROLS, SUPPLIED BY PRICE (EHPD)
- FACTORY MOUNTED PNEUMATIC CONTROLS, SUPPLIED BY PRICE (EHPP)

UNIT OPTIONS:

- GALVANIZED NEMA1 CONTROLS ENCLOSURE (PS)
- STAINLESS STEEL NEMA1 CONTROLS ENCLOSURE (SSPS)
- DISCONNECT SWITCH (DSW)
- BRASS AIRFLOW SENSOR GAUGE TAPS (GT)

UNIT SIZE	INLET SIZES
	D
6	5 ⁷ / ₈ (149)
7	6 ⁷ / ₈ (175)
8	7 ⁷ / ₈ (200)
9	8 ⁷ / ₈ (225)
10	9 ⁷ / ₈ (251)
12	11 ⁷ / ₈ (302)
14	13 ⁷ / ₈ (352)
16	15 ⁷ / ₈ (403)

ALL METRIC DIMENSIONS [] ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		price [®]	
		APPROVED BY: <i>BS</i>	RDV EXHAUST CONTROL VALVE VARIABLE VOLUME STAINLESS STEEL
ENGINEER:		DRAWING NO: 276849	
CUSTOMER:		DATE DRAWN: 2025-05-22	
SUBMITTAL DATE:	SPEC. SYMBOL:		