


KX445

4" KITCHEN EXHAUST LOUVER



KX445

4" Kitchen Exhaust Louver

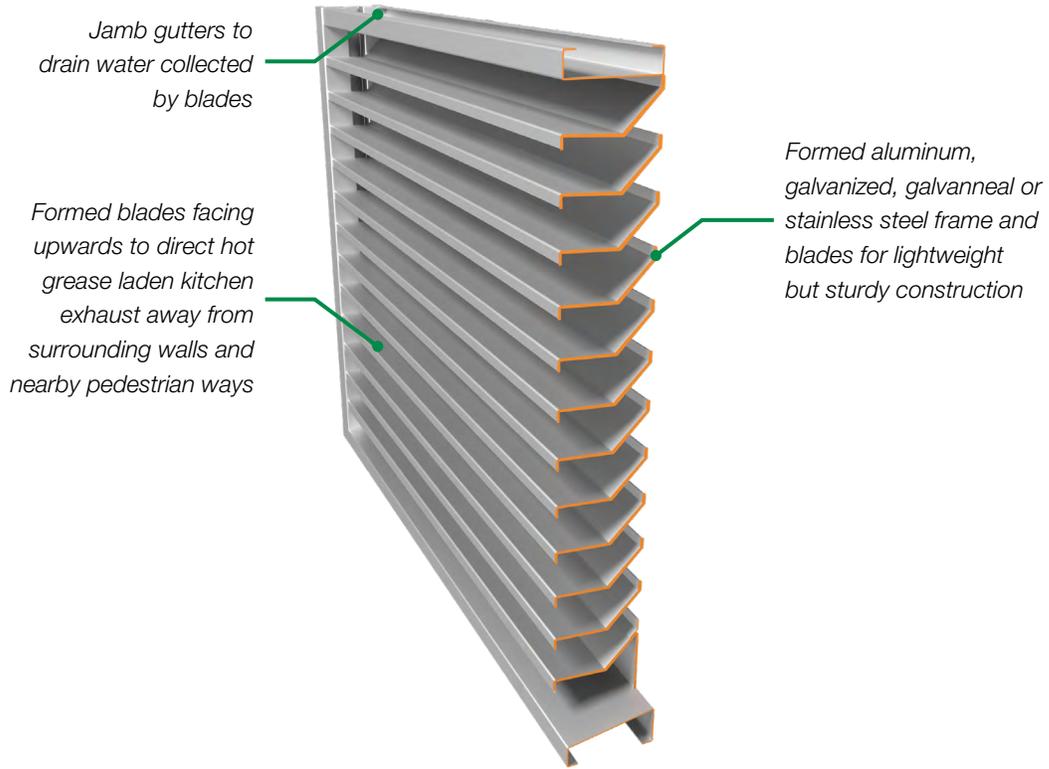

KX445 4" Kitchen Exhaust Louver



Multi-Section Wide

OPTIONS

- + **Sills:** Extended sill (loose) 14 gauge aluminum, or 16 gauge galvanized, galvanized or stainless steel.
- + **Mullions:** Concealed aluminum, galvanized steel or stainless steel formed metal mullions for multi-section wide louvers
- + **Blank-offs/Insulation:** Aluminum blank-offs available with or without insulation – insulation available in 1" – 4" (25 mm – 102 mm) thickness
- + **Mounting/Flanges:** Perimeter flanges, mounting angles, masonry straps or glazing adapters. Standard flanges are 1.5" (38 mm); other sizes from 0.5" (13 mm) to 4" (102 mm) are available.
- + **Screens:** 0.5" x 0.5" (12 mm x 12 mm) 16 gauge expanded aluminum bird screen with or without frame; insect screens also available
- + **Finishes:** Baked Enamel (Duracron), 2-Coat PVDF (Duranar), 3-Coat PVDF (Duranar XL), Prime Coat, Clear Anodized, Colour Anodized or Custom Finish. Colours must be selected from a Price finishes chart or provided with a colour sample.

TYPICAL APPLICATION

Designed to meet the requirements of NFPA 96 Section 7.8.3 for Wall Terminals; the KX445 directs hot grease laden kitchen exhaust upwards and away from surrounding walls and nearby pedestrian ways. At 4" deep with a 3° upward exhaust blade angle, Price's KX445 fixed blade kitchen exhaust louvers are available in a variety of materials and finishes to suit your project.

FEATURES

- + Vertical jamb gutter
- + All welded construction
- + 0.081" (2 mm) formed aluminum or 0.062" (1.5 mm) formed galvanized, galvanized or stainless steel blades and frames
- + Nominal 44.8% free area, based on 48" x 48" (1219 mm x 1219 mm) louver



Product Improvement is a continuing endeavour at Price. Therefore, specifications are subject to change without notice. Consult your Price Sales Representative for current specifications or more detailed information. Not all products may be available in all geographic areas. All goods described in this document are warranted as described in the Limited Warranty shown at priceindustries.com. The complete Price product catalog can be viewed online at priceindustries.com.