





LNT NO COIL

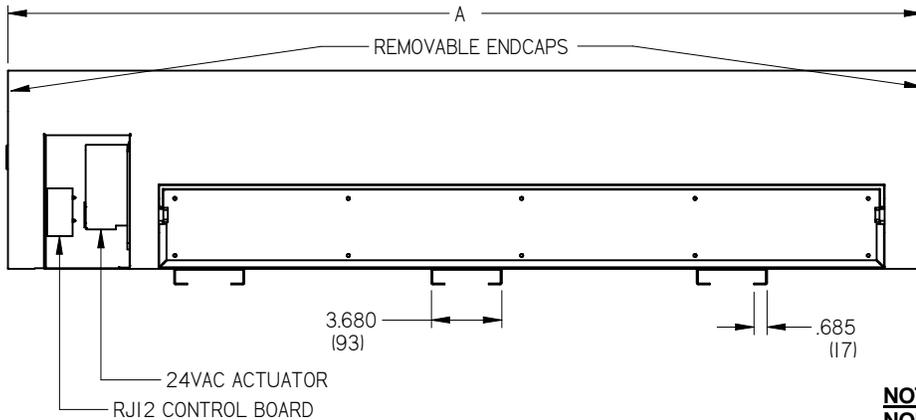

ROUGH OPENING NOM L X W	LENGTH A	AIR VALVE SIZE (CFM)
<input type="checkbox"/> 24 X 10 (1219 X 254)	24 7/8 (1216)	<input type="checkbox"/> 100
<input type="checkbox"/> 48 X 10 (1219 X 254)	47 7/8 (1216)	<input type="checkbox"/> 200 <input type="checkbox"/> 300 <input type="checkbox"/> 400
<input type="checkbox"/> 72 X 10 (1829 X 254)	71 7/8 (1826)	<input type="checkbox"/> 200 <input type="checkbox"/> 300 <input type="checkbox"/> 400
<input type="checkbox"/> 96 X 10 (2438 X 254)	95 7/8 (2435)	<input type="checkbox"/> 400 <input type="checkbox"/> 600 <input type="checkbox"/> 800

**NOTE: LFG MUST BE ORDERED SEPARATELY
NOMINAL GRILLE SIZE = L-0.125"(3) X 9.875"(251)**

1000 STYLE 125/187 STYLE

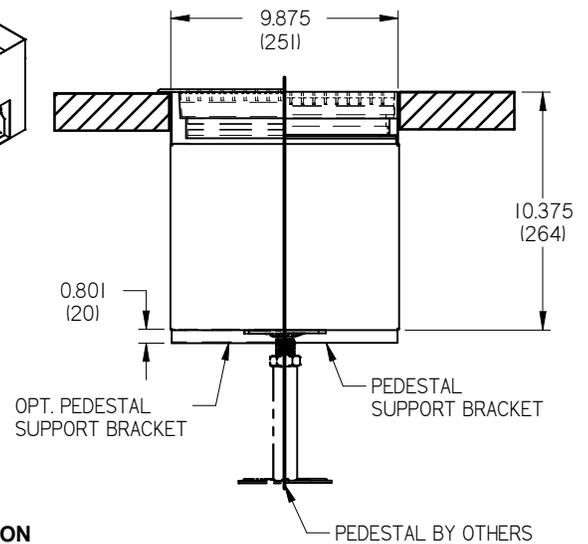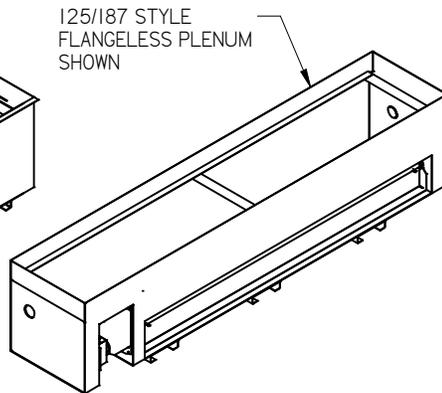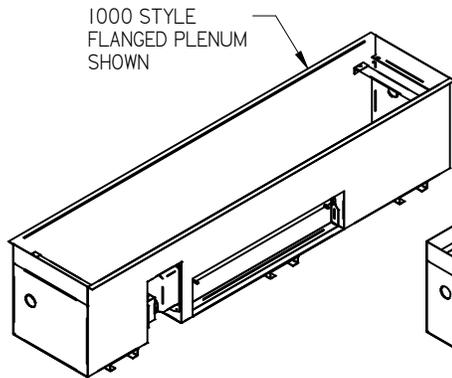

NOTE:

- LNT WITH LFG INSTALLED IS DESIGNED TO WITHSTAND LIGHT FOOT TRAFFIC
- PEDESTAL BRACKETS SUPPLIED & MOUNTED BY PRICE
- PEDESTAL & PEDESTAL HEAD SUPPLIED BY OTHERS

PLENUM:

- 20 GAUGE STEEL CONSTRUCTION
- BLACK FINISH
- DROP-IN INSTALLATION FROM ABOVE FLOOR
- COMES WITH REMOVABLE ENDCAPS FOR CONTINUOUS & DISCRETE GRILLE INSTALLATIONS

DAMPER CONTROL:

- 24 VAC FLOATING POINT ACTUATOR
- RJ12 CONTROL BOARD WITH PLENUM RATED CONTROL CABLE

PEDESTAL BRACKETS OPTION (REQUIRED FOR PDS):

- PEDESTAL BRACKETS
 - 2 FOR 24X10 UNITS
 - 3 FOR 48X10 UNITS
 - 4 FOR 72X10 UNITS
 - 5 FOR 96X10 UNITS

ACOUSTIC LINER:

- 1/2" INTERNAL FIBER FREE LINER (3LB DENSITY MIN.)

CFLEX CONTROL CABLE (GREEN):

- 15G - 15 FT. STRANDED
- 25G - 25 FT. STRANDED
- 35G - 35 FT. STRANDED



Intertek

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE
ENGINEER:		
CUSTOMER:		<i>PS</i>
SUBMITTAL DATE:		271134
SPEC. SYMBOL:		LNT NO COIL
		2024/11/26